

# Manual for RSiena

Ruth M. Ripley  
Tom A.B. Snijders  
Paulina Preciado Lopez

University of Oxford: Department of Statistics; Nuffield College

May 15, 2011



## Abstract

SIENA (for Simulation Investigation for Empirical Network Analysis) is a computer program that carries out the statistical estimation of models for the evolution of social networks according to the dynamic actor-oriented model of [Snijders \(2001, 2005\)](#), [Snijders et al. \(2007\)](#), and [Snijders et al. \(2010\)](#). This is the manual for SIENA version 4, also called RSiena, which is a contributed package to the statistical system R. The manual is based on the earlier manual for SIENA version 3, and also contains contributions written for that manual by Mark Huisman, Michael Schweinberger, and Christian Steglich.

# Contents

<b>1</b>	<b>General information</b>	<b>5</b>
<b>I</b>	<b>Minimal Intro</b>	<b>6</b>
<b>2</b>	<b>Getting started with SIENA</b>	<b>6</b>
2.1	Data formats . . . . .	6
2.2	Installation and running the graphical user interface under Windows . . . . .	7
2.2.1	Using the graphical user interface from Mac or Linux . . . . .	8
2.2.2	Running the graphical user interface: more details . . . . .	9
2.2.3	Entering Data. . . . .	9
2.2.4	Running the Estimation Program . . . . .	10
2.2.5	Details of The Data Entry Screen . . . . .	11
2.2.6	Continuing the estimation . . . . .	12
2.3	Using SIENA within R . . . . .	13
2.3.1	For those who are slightly familiar with R . . . . .	13
2.3.2	For those fully conversant with R . . . . .	14
2.3.3	The transition from using the graphical user interface to commands . . . . .	14
2.4	An example R script for getting started . . . . .	15
2.5	Outline of estimation procedure . . . . .	42
2.6	Using multiple processes . . . . .	43
2.7	Steps for looking at results: Executing SIENA. . . . .	43
2.8	Giving references . . . . .	44
2.9	Getting help with problems . . . . .	44
<b>II</b>	<b>Users' manual</b>	<b>46</b>
<b>3</b>	<b>Program parts</b>	<b>46</b>
<b>4</b>	<b>Input data</b>	<b>47</b>
4.1	Digraph data files . . . . .	47
4.1.1	Transformation between matrix and edge list formats . . . . .	48
4.1.2	Structurally determined values . . . . .	49
4.2	Dyadic covariates . . . . .	50
4.3	Individual covariates . . . . .	51
4.4	Interactions and dyadic transformations of covariates . . . . .	52
4.5	Dependent action variables . . . . .	52
4.6	Missing data . . . . .	53
4.7	Composition change . . . . .	54
4.8	Centering . . . . .	54
<b>5</b>	<b>Model specification</b>	<b>56</b>
5.1	Important structural effects for network dynamics: one-mode networks . . . . .	57
5.2	Important structural effects for network dynamics: two-mode networks . . . . .	60
5.3	Effects for network dynamics associated with covariates . . . . .	60

5.4	Cross-network effects for dynamics of multiple networks	62
5.5	Effects on behavior evolution	63
5.6	Additional interaction effects	65
5.6.1	Interaction effects for network dynamics	65
5.7	Time heterogeneity in model parameters	66
5.8	Limiting the maximum outdegree	66
<b>6</b>	<b>Estimation</b>	<b>68</b>
6.1	The estimation function <code>siena07</code>	68
6.1.1	Initial Values and Convergence Check	69
6.2	Some important components of the <code>sienaFit</code> object	71
6.3	Algorithm	72
6.4	Output	73
6.4.1	Fixing parameters	76
6.4.2	Automatic fixing of parameters	76
6.4.3	Conditional and unconditional estimation	76
6.4.4	Required changes from conditional to unconditional estimation	77
<b>7</b>	<b>Standard errors</b>	<b>78</b>
<b>8</b>	<b>Tests</b>	<b>79</b>
8.1	Wald-type tests	79
8.2	Score-type tests	81
8.3	Example: one-sided tests, two-sided tests, and one-step estimates	81
8.3.1	Multi-parameter tests	82
8.4	Alternative application: convergence problems	84
8.5	Testing differences between independent groups	84
8.6	Testing time heterogeneity in parameters	85
<b>9</b>	<b>Simulation</b>	<b>87</b>
9.1	Accessing the generated networks	88
9.2	Conditional and unconditional simulation	88
<b>10</b>	<b>Getting started</b>	<b>90</b>
10.1	Model choice	90
10.1.1	Exploring which effects to include	90
10.2	Convergence problems	91
<b>11</b>	<b>Multilevel network analysis</b>	<b>93</b>
11.1	Multi-group Siena analysis	94
11.2	Meta-analysis of Siena results	94
11.2.1	Meta-analysis directed at the mean and variance of the parameters	95
11.2.2	Meta-analysis directed at testing the parameters	96
11.2.3	Contrast between the two kinds of meta-analysis	97
<b>12</b>	<b>Formulas for effects</b>	<b>99</b>
12.1	Network evolution	99
12.1.1	Network evaluation function	99
12.1.2	Multiple network effects	107
12.1.3	Network endowment function	112

12.1.4	Network rate function . . . . .	112
12.2	Behavioral evolution . . . . .	113
12.2.1	Behavioral evaluation function . . . . .	113
12.2.2	Behavioral endowment function . . . . .	116
12.2.3	Behavioral rate function . . . . .	116
<b>13</b>	<b>Parameter interpretation</b>	<b>117</b>
13.1	Longitudinal models . . . . .	117
13.1.1	Ego – alter selection tables . . . . .	118
13.1.2	Ego – alter influence tables . . . . .	123
<b>III</b>	<b>Programmers’ manual</b>	<b>126</b>
<b>14</b>	<b>Get the source code</b>	<b>126</b>
<b>15</b>	<b>Other tools you need</b>	<b>126</b>
<b>16</b>	<b>Building, installing and checking the package</b>	<b>126</b>
<b>17</b>	<b>Adding an effect</b>	<b>127</b>
17.1	Example: adding the truncated out-degree effect . . . . .	129
<b>A</b>	<b>List of Functions in Order of Execution</b>	<b>133</b>
<b>B</b>	<b>Changes compared to earlier versions</b>	<b>144</b>
<b>C</b>	<b>References</b>	<b>152</b>

# 1 General information

SIENA<sup>1</sup>, shorthand for Simulation Investigation for Empirical Network Analysis, is a computer program that carries out the statistical estimation of models for repeated measures of social networks according to the dynamic actor-oriented model of Snijders and van Duijn (1997), Snijders (2001), Snijders, Steglich, and Schweinberger (2007), and Snijders, Koskinen, and Schweinberger (2010); also see Steglich, Snijders, and Pearson (2010). A tutorial for these models is in Snijders, van de Bunt, and Steglich (2010). Some examples are presented, e.g., in van de Bunt (1999); van de Bunt, van Duijn, and Snijders (1999) and van Duijn, Zeggelink, Huisman, Stokman, and Wasseur (2003); and Steglich, Snijders, and West (2006).

A website for SIENA is maintained at <http://www.stats.ox.ac.uk/~snijders/siena/>. At this website ('publications' tab) you shall also find references to introductions in various other languages.

This is a manual for SIENA version 4.0, which is also called RSiena; the manual is provisional in the sense that it still is continually being updated. RSiena is a contributed package for the R statistical system which can be downloaded from <http://cran.r-project.org>. For the operation of R, the reader is referred to the corresponding manual. If desired, SIENA can be operated *apparently* independently of R, as is explained in Section 2.2.

RSiena was programmed by Ruth Ripley and Kristis Boitmanis, in collaboration with Tom Snijders.

In addition to the 'official' R distribution of RSiena, there is an additional distribution at R-Forge, which is a central platform for the development of R packages offering facilities for source code management. Sometimes latest versions of RSiena are available at [http://r-forge.r-project.org/R/?group\\_id=461](http://r-forge.r-project.org/R/?group_id=461) before being incorporated into the R package that can be downloaded from CRAN. In addition, at R-Forge there is a package RSienaTest which may include additional options that are still in the testing stage.

We are grateful to NIH (National Institutes of Health) for their funding of programming RSiena. This is done as part of the project *Adolescent Peer Social Network Dynamics and Problem Behavior*, funded by NIH (Grant Number 1R01HD052887-01A2), Principal Investigator John M. Light (Oregon Research Institute).

For earlier work on SIENA, we are grateful to NWO (Netherlands Organisation for Scientific Research) for their support to the integrated research program *The dynamics of networks and behavior* (project number 401-01-550), the project *Statistical methods for the joint development of individual behavior and peer networks* (project number 575-28-012), the project *An open software system for the statistical analysis of social networks* (project number 405-20-20), and to the foundation ProGAMMA, which all contributed to the work on SIENA.

---

<sup>1</sup>This program was first presented at the International Conference for Computer Simulation and the Social Sciences, Cortona (Italy), September 1997, which originally was scheduled to be held in Siena. See Snijders and van Duijn (1997).

## Part I

# Minimal Intro

## 2 Getting started with SIENA

There are two ways of getting started with **SIENA**: by using the graphical user interface (*GUI*) via `siena01Gui` or by using R commands in the regular R way. As a preliminary, we start with section 2.1 on data formats. Then we give a minimal cookbook-style introduction for getting started with **SIENA** using the graphical user interface via `siena01Gui`. In Section 2.3 we explain how to run **SIENA** as the package **RSiena** from within R. If you are looking for help with a specific problem, read Section 2.9.

### 2.1 Data formats

1. Network and covariate files should be text files with a row for each node. The numbers should be separated by spaces or tabs.
2. An exogenous events file can be given, indicating change of composition of the network in the sense that some actors are not part of the network during all the observations. This will trigger treatment of such change of composition according to [Huisman and Snijders \(2003\)](#). This file must have one row for each node. Each row should consist of a set of pairs of numbers which indicate the periods during which the corresponding actor was present. For example,

```
1 3
1.5 3
1 1.4 2.3 3
2.4 3
```

would describe a network with 4 nodes, and 3 observations. Actor 1 is present all the time, actor 2 joins at time 1.5, actor 3 leaves and time 1.4 then rejoins at time 2.3, actor 4 joins at time 2.4. All intervals are treated as closed.

3. If you use software such as Excel or SPSS to create input files to use with **RSiena** on a Mac, try to ensure that you do not create Unicode<sup>2</sup> files. This is an option in SPSS, and will depend on the file type with Excel.

More about input data can be found in Section 4.

---

<sup>2</sup>Unicode is one of the standards for encoding text, an alternative to ASCII. Unicode formats are denoted by symbols such as UTF-8 and UCS-2.

## 2.2 Installation and running the graphical user interface under Windows

1. Install R (most recent version). Note that if this leads to any problems or questions, R has an extensive list of ‘frequently asked questions’ which may contain adequate help for you.

Start R, click on **Packages** and then on **Install package(s)**.... You will be prompted to select a mirror for download. Then select the packages **xtable**, **network**, **rlecuyer**, **snow**, and **RSiena**. (There may be later zipped version of **RSiena** available on our web site: to install this, use **Install package(s)** from local zip files, and select **RSiena.zip** (with the appropriate version number in the file name).

If you are using Windows Vista and get an error of denied permission when trying to install the packages, you may get around this by right-clicking the R icon and selecting ‘Run as administrator’.

2. If you want to get the latest beta version of **RSiena**, before installing the packages, select **Packages/Select repositories...** and select **R-forge**. Then install the packages in the normal way.
3. Start up R from the start menu or by (double-)clicking a shortcut on the taskbar (or desktop).
4. By right-clicking the shortcut and clicking ‘Properties’ you can change the startup working directory, given in the ‘Start in’ field. Data files will be searched for in the first instance in this directory.
5. Load the **RSiena** package via the menu **Packages**
6. Type  
`siena01Gui()`
7. You should see a screen like that shown in [Figure 1](#)

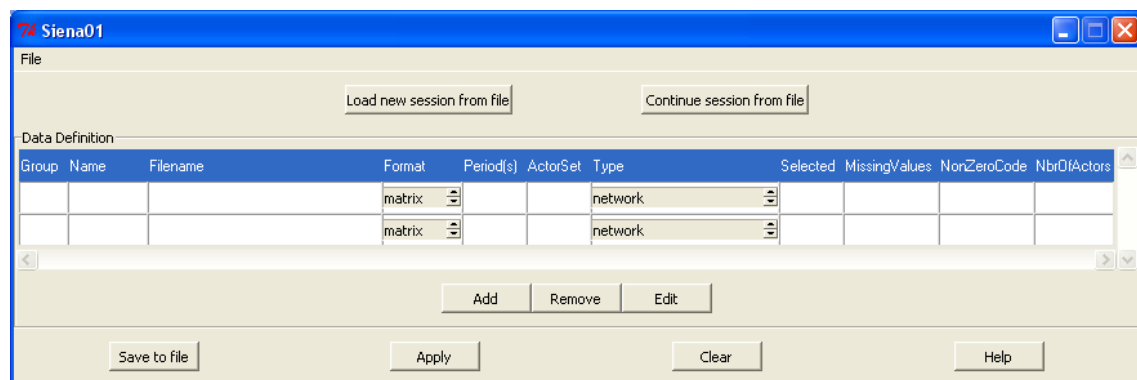


Figure 1: Siena Data Entry Screen

8. If the initial screen appears correctly, then check your working directory or folder. This is the directory that is opened immediately when clicking the **Add** button. Various problems can be avoided by making sure that the working directory is the directory that also contains the data files and the saved session file (see below)! You need to have permission to write files in the working directory, and the data files you want to use need to be in the same directory. To change the directory:
  - (a) Right click on the shortcut, and select Properties. (if somehow you don't have permission to do this, try copying the shortcut and pasting to create another with fewer restrictions. (This may not work in Windows 7: you may need to copy it from the visible desktop and then paste it in Windows Explorer in your personal Desktop area.)) In the **Start in:** field type the name of the directory in which you wish to work, i.e., a directory in which you can both read and write files. Then click OK.
  - (b) To run the examples, put the session file and the data files in the chosen directory before starting RSiena.
  - (c) To use your own data, put that data in the chosen directory before starting RSiena.

### 2.2.1 Using the graphical user interface from Mac or Linux

1. Install R (most recent version) as appropriate for your computer.
2. Within R, type
 

```
install.packages("RSiena")
```

 To use the latest beta version, use
 

```
install.packages("RSiena", repos="http://R-Forge.R-project.org")
```
3. Navigate to the directory RSiena package, (which you can find from within R by running `system.file(package="RSiena")`) and find a file called `sienascript`. Run this to produce the Siena GUI screen. (You will probably have to change the permissions first (e.g. `chmod u+x sienascript`)).
4. If you want to use the GUI, you need tcl/tk installed. This is an (optional) part of the R installation on Mac. On Linux, you may need to install Tcl/tk and the extra Tcl/tk package `tktable`. On Ubuntu Linux, the following commands will do what is necessary (perhaps version numbers must be adapted):<sup>3</sup>

```
sudo apt-get install tk8.5
sudo apt-get install libtktable2.9
```

---

<sup>3</sup>Thanks to Michael Schweinberger and Kristis Boitmanis for supplying these commands.



### 2.2.2 Running the graphical user interface: more details

Originally RSiena provided access to the GUI interface direct from Windows. This is not now possible. This section details some helpful notes about starting RSiena within R<sup>4</sup>. This is done by starting up R and working with the following commands. Note that R is case-sensitive, so you must use upper and lower case letters as indicated.

First, set the ‘working directory’ of the R session to the same directory that holds the data files; for example,

```
setwd('C:/SienaTest')
```

(Note the forward slash<sup>5</sup>, and the quotes are necessary<sup>6</sup>.) Windows users can use the Change dir... option on the File menu.

You can use the following commands to make sure the working directory is what you intend and see which files are included in it:

```
getwd()
```

```
list.files()
```

Assuming you see the data files, then you can proceed to load the RSiena package, with the library function:

```
library(RSiena)
```

The other packages will be loaded as required, but if you wish to examine them or use other facilities from them you can load them using:

```
library(snow)
```

```
library(network)
```

```
library(rlecuyer)
```

The following command will give a review of the functions that RSiena offers:

```
library(help=RSiena)
```

After that, you can use the RSiena GUI. It will ‘launch’ out of the R session.

```
siena01Gui()
```

You can monitor the R window for error messages – sometimes they are informative.

When you are done, quit R in the polite way:

```
q()
```

(Windows users may quit from the File menu or by closing the window.)

### 2.2.3 Entering Data.

There are two ways to enter the data.

1. Enter each of your data files using **Add**.

Fill in the various columns as described in Section 2.2.5.

2. If you have earlier saved the specification of data files, e.g., using **Save to file**, then you can use **Load new session from File**.

This requires a file in the format described at the end of Section 2.2.5; such a file

---

<sup>4</sup>We are grateful to Paul Johnson for supplying these ideas.

<sup>5</sup>You can use backward ones but they must be doubled: `setwd('C:\\SienaTest')`.

<sup>6</sup>Single or double, as long as they match.

can be created and read in an editor or spreadsheet program, and it is created in .csv (comma separated) format by the `siena01Gui()` when you request Save to file.

3. If you wish to remove files, use the Remove option rather than blanking out the entries.

Once you have done this, check that the Format, Period, Type, etc., are correct, and enter any values which indicate missingness in the Missing Values column. A (minimal) complete screen is shown in Figure 2. The details of this screen are explained in Section 2.2.5.

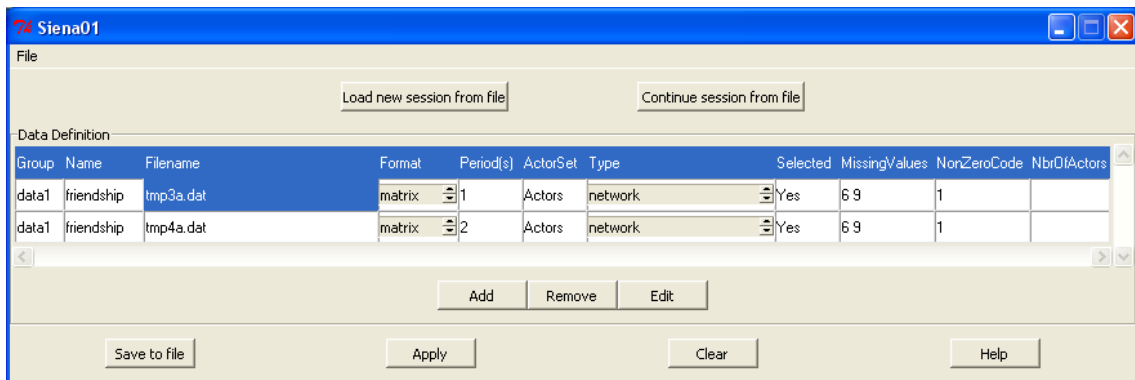


Figure 2: Example of a Completed Data Entry Screen

## 2.2.4 Running the Estimation Program

1. Click Apply: you will be prompted to save your work. Then you should see the Model Options screen shown in Figure 3. If this does not happen, then one possible

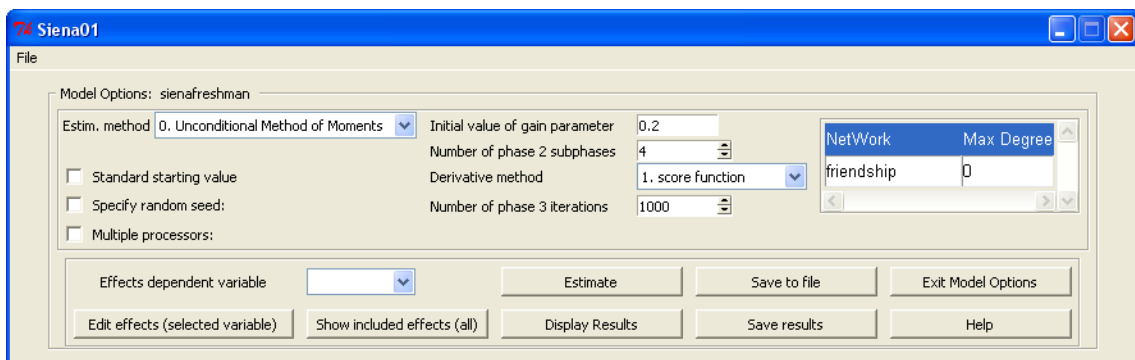


Figure 3: Model options screen

source of error is that the program cannot find your files; e.g., the files are not in the working directory (see above) but in a different directory.

If errors occur at this moment and the options screen does not appear, then you can obtain diagnostic error messages working not through the `siena01Gui`, but directly within R as described in Section 2.3.1. This will hopefully help you solving this problem; later on you can then work through the `siena01Gui` again.

2. Select the options you require.
3. Use **Edit Effects** to choose the effects you wish to include. Note you can edit the effects for just one dependent variable at a time if you wish by selecting one dependent variable in ‘Effects dependent variable’.
4. Click **Estimate**.
5. You should see the **SIENA** screen of the estimation program.
6. When the program has finished, you should see the results. If not, click **Display Results** to see the results. The output file which you will see is stored, with extension `.out` in the directory in which you start `siena.exe`.
7. You may restart your estimation session at a later date using the **Continue session from file** on the **Data Entry Screen**.  
The restart needs a saved version of the data, effects and model as R objects. This will be created automatically when you first enter the **Model Options Screen**, using the default effects and model. You may save the current version at any time using the **Save to file** button, and will be prompted to do so when you leave this screen.

### 2.2.5 Details of The Data Entry Screen

**Group** May be left blank unless you wish to use the **multi-group** option described in Section 11.1. Should not contain embedded blanks.

**Name** Network files or dyadic covariates should use the same name for each file of the set. Other files should have unique names, a list of space separated ones for constant covariates.

**File Name** Usually entered by using a file selection box, after clicking **Add**.

**Format** Only relevant for networks or dyadic covariates. Can be a matrix; a single Pajek network (`.net`) (not for two-mode networks); or a **Siena network** file (an edgelist, containing three or four columns: (from, to, value, wave (optional)), not yet tested for dyadic covariates!).

**Period(s)** Only relevant for networks and dyadic covariates. All other files cover all the relevant periods. Indicates the order of the network and dyadic covariate files. Should range from 1 to M within each **group**, where M is the number of time points (waves). Use multiple numbers separated by spaces for multi-wave Siena network files.

**ActorSet** If you have more than one set of nodes, use this column to indicate which is relevant to each file. Should not contain embedded blanks.

**Type** Indicate here what type of data the file contains. Options are:

**network** (i.e., a one-mode network)  
**bipartite** (i.e., a two-mode network)  
**behavior**  
**constant covariate**  
**changing covariate**  
**constant dyadic covariate**  
**changing dyadic covariate**  
**exogenous event** (for changing composition of the actor set)

**Selected** Yes or No. Files with **Yes** or *blank* will be included in the model. Use this field to remove any networks or behavior variables that are not required in the model.

**Missing Values** Enter any values which indicate missingness, with spaces between different entries.

**Nonzero Codes** Enter any values which indicate ties, with spaces between different entries.

**NbrOfActors** For Siena network files, enter the number of actors. For Siena net bipartite files, enter the two dimensions (number of rows, number of columns) of the network, separated by a blank space.

The details of the screen can be saved to a *session* file, from which they can be reloaded. But you can create a session file directly: it should have columns with exactly the same names and in exactly the same order as those of the **Data Entry** screen, and be of any of the following types:

Extension	Type
.csv	Comma separated
.dat or .prn	Space delimited
.txt	Tab delimited

The root name of this input file will also be the root name of the output file.

### 2.2.6 Continuing the estimation

1. Below you will see some points about how to evaluate the reliability of the results. If the convergence of the algorithm is not quite satisfactory but not extremely poor, then you can continue just by **Applying** the estimation algorithm again.

2. If the parameter estimates obtained are very poor (not in a reasonable range), then it usually is best to start again, with a simpler model, and from a standardized starting value. The latter option must be selected in the **Model Options** screen.

## 2.3 Using SIENA within R

There are two alternatives, depending on your familiarity with R, treated in Sections 2.3.1 and 2.3.2. Section 2.3.3 explains how to make the step from the use of the GUI to the use of R commands in the regular R way.

Section 2.4 presents an example of an R script for getting started with RSiena.

### 2.3.1 For those who are slightly familiar with R

1. Install R.
2. Install (within R) the package RSiena, and possibly `network` (required to read Pajek files), `snow` and `rlecuyer` (required to use multiple processors).
3. Set the working directory of R appropriately (`setwd()` within R or via a desktop shortcut).
4. You can get help by the command

```
help(RSiena)
```

This will open a browser window with help information; by clicking on the ‘Index’ link in the bottom line of this window, you get a window with all RSiena commands. The command

```
RShowDoc("s_man400", package="RSiena")
```

opens the official RSiena manual.

5. Create a session file using `siena01Gui()` within R, or using an external program.
6. Then, within R,
  - (a) Use `sienaDataCreateFromSession()` to create your data objects.
  - (b) Use `getEffects()` to create an effects object.
  - (c) Use `fix()` to edit the effects object and select the required effects, by altering the `Include` column to `TRUE`.
  - (d) Use `sienaModelCreate()` to create a model object.
  - (e) Use `siena07()` to run the estimation procedure.

Basic output will be written to a file. Further output can be obtained by using the `verbose=TRUE` option of `siena07`.

### 2.3.2 For those fully conversant with R

1. Add the package `RSiena`
2. Get your network data (including dyadic covariates) into matrices, or sparse matrices of type `dgTMatrix`. `spMatrix()` (in package `Matrix`) is useful to create the latter.
3. Covariate data should be in vectors or matrices.
4. All missing data should be set to `NA`.
5. Create `SIENA` objects for each network, behavior variable and covariate, using the functions `sienaNet()` (for both networks and behavior variables), `coCovar()` etc.
6. Create a `SIENA` data object using `SienaDataCreate()`.
7. Use `getEffects()` to create an effects object.
8. Use functions such as `includeEffects()`, `setEffect()`, and `includeInteraction()` to further specify the model.
9. Use `sienaModelCreate()` to create a model object.
10. Use `siena07()` to run the estimation procedure.
11. Note that it is possible to use multiple processors in `siena07`. For details see section 2.6.
12. Also note the availability of the parameter `prevAns` to reuse estimates and derivatives from a previous run with the same effects.

Basic output will be written to a file. Further output can be obtained by using the `verbose=TRUE` option of `siena07`. The scripts on the scripts page of the `RSiena` website give many examples of how to use `RSiena`.

### 2.3.3 The transition from using the graphical user interface to commands

At some moment, for users who started learning the use of `RSiena` through the GUI, it can be desirable to make the transition to using commands in the regular R way. This will make available more options and integration with other R features. The transition can easily be made as follows.

After having made at least one estimation run in the GUI (which could be with the default model specification, without having made any further additions to the model; but it could also be with a more complicated model), click the button **Save to file**. You will be prompted for a file name with extension `.RData`. Make sure that you do give a non-empty name before the dot in `.RData`; for the moment, let us choose the name `trans.RData`.

Then later in an R session you can load the `trans.RData`. This can be done in Windows by selecting **File – Load Workspace** from the drop down menu, and entering this file name. It can also be done by entering the command

```
load("trans.RData")
```

This will make available three objects, for data, model, and effects. What is currently in your workspace is shown by the command

```
ls()
```

This will probably show that the loaded objects have the names `mydata`, `mymodel`, and `myeff`. These are the type of objects created by the functions `sienaDataCreate`, `sienaModelCreate`, and `getEffects`, and discussed in the SIENA script in Section 2.4.

Now attach the package `RSiena` and subsequently ask for the descriptions of these three objects:

```
library(RSiena)
mydata
mymodel
myeff
```

This will give short descriptions and thereby a confirmation of what has been imported from the GUI session to the regular R session. From here on you can continue and work with R commands, as in the script, to further specify the model by working on the effects object, and then estimate the parameters by the `siena07` function.

The precise point to continue from here, using the scripts in the next section and also on the `RSiena` website, is to use script `RscriptSienaVariableFormat.R`, starting with section D (*Defining Effects*), part 3 (*Adding/removing effects using `includeEffects`*). After this, you are advised to continue with script `RscriptSienaRunModel.R`.

## 2.4 An example R script for getting started

The best way to get acquainted with `RSiena` is perhaps going through some existing scripts. The script below is useful for this purpose. At the ‘`RSiena` scripts’ page [http://www.stats.ox.ac.uk/~snijders/siena/siena\\_scripts.htm](http://www.stats.ox.ac.uk/~snijders/siena/siena_scripts.htm) of the `RSiena` website it is available divided into smaller pieces, and updated. The script is written so as to be useful for novice as well as experienced R users. The ‘`RSiena` scripts’ page of the `RSiena` website also contains some other scripts that may be useful. The appendix of this manual contains a list of `RSiena` functions which may be consulted in addition to this script.

```
#####
###
### ---- RscriptDataFormat.R: a script for the introduction to RSiena -----
###
###                                     version: April 11, 2011
#####
#
# RscriptDataFormat.R is followed by
# RscriptSienaVariableFormat.R, which formats data and specifies the model, and
# RscriptSienaRunModel.R, which runs the model and estimates parameters
# RscriptSienaBehaviour.R, which illustrates an example of analysing the
```

```

# coevolution of networks and behaviour
#
# The entire model fitting is summarised at the end of RscriptSienaRunModel.R
# (without comments)
#
# This is an R script for getting started with RSiena, written by
# Robin Gauthier, Tom Snijders, Ruth Ripley, Johan Koskinen, and
# Paulina Preciado, with some examples borrowed from Christian Steglich.
# Lines starting with # are not processed by R but treated as comments.
# The script has a lot of explanation of R possibilities that will be
# familiar for readers well acquainted with R, and can be skipped by them.
#
# A terrifically easily accessible online introduction to R is given at
#
#     http://www.statmethods.net/
#
# R is case sensitive.
# The left-arrow "<-" is very frequently used: it denotes an assignment,
# "a <- b" meaning that object a gets the value b.
# Often b is a complicated expression that has to be evaluated by R.

# Help within R can be called by typing a question mark and the name of the
# function you need help with. For example ?library loading will bring up a
# file titled "loading and listing of packages".
# Comments are made at the end of commands after #,
# or in lines starting with # telling R to ignore everything beyond it.
# This session will be using s50 data which are supposed to be
# present in the working directory.
# Note that any command in R is called a function;
# in general the command syntax for calling R's functions is function(x) where
# function is a saved function and x the name of the object to be operated on.
# For new R users:
# note that there is a lot of documentation available at
# http://cran.xl-mirror.nl/other-docs.html
# including some short introductions, handy reference cards,
# and introductions in a lot of languages besides English.

##### - CALLING THE DATA AND PRELIMINARY MANIPULATIONS - #####

# The library command loads the packages needed during the session.

    library(RSiena)
    library(snow) # (these four additional libraries will be loaded
    library(network)# automatically if required)
    library(rlecuyer)

# You need to have INSTALLED all of them

?install.packages

# Or click on the tab "Packages", "Instal package(s)", then select a CRAN mirror
# (e.g. Bristol if you are in the UK) and finally select from the list
# the package you wish to install.

```



```

# Where are you?

getwd()

# By something like
# setwd('C:/SienaTest')
# you can set the directory but note the quotes and forward slash.
# It is also possible to set the directory using the menus if you have them.
# On a windows machine, you can predetermine the working directory
# in the <Properties> of the shortcut to R;
# these are accessible by right-clicking the shortcut.

# If you want to set the working directory to for example
# "C:\Documents and Settings\johan\My Documents\RSiena_course"
# simply copy and paste from windows explorer or type
#   setwd('C:/Documents and Settings/johan/My Documents/RSiena_course')
# or
#   setwd('C:\\Documents and Settings\\johan\\My Documents\\RSiena_course')
#
# but note that "\" has to be changed; both '/' and '\\\' work!!!

# What is there?

list.files()

# What is available in RSiena?

?RSiena

# (these are .html HELP PAGES)

# Or, for a listing of all accessible functions in RSiena:

library(help=RSiena)

# which is very useful

# Where is the manual?

RShowDoc("s_man400", package="RSiena")

# (Note, however, that it is possible that the Siena website
# at http://www.stats.ox.ac.uk/~snijders/siena/ contains a more recent version.)

# Each data is named (for example below we name it friend.data.w1)
# so that we can call it as an object within R.
# If you read an object straight into R, it will treat it as a
# dataset, or in R terminology a "data frame".
# Here this is not what we want, therefore on reading
# we will immediately convert it to a matrix.
# R will read in many data formats, these are saved as .dat files, the command
# to read them is read.table.
# If we wished to read a .csv file we would have
# used the read.csv command.

```

```

# The pathnames have forward slashes, or double backslashes
# if single backslashes are used, one of the error messages will be:
# 1: '\R' is an unrecognized escape in a character string

#-----

# Quick start(Data assignment).
# Please make sure the data is in your working directory

    friend.data.w1 <- as.matrix(read.table("s50-network1.dat"))
    friend.data.w2 <- as.matrix(read.table("s50-network2.dat"))
    friend.data.w3 <- as.matrix(read.table("s50-network3.dat"))
    drink <- as.matrix(read.table("s50-alcohol.dat"))
    smoke <- as.matrix(read.table("s50-smoke.dat"))

# You need the data to be in your working directory.
# The data set is on ther Siena website ("Datasets" tab) and must be
# unzipped in your working directory.

# Explanation of data structures and formats below

##### - DIFFERENT DATA FORMATS - #####
###
### The assignments here involve reading in data to a "data frame"
### data <- read.table("data.dat")
### reads your text file into a "data frame"; check the class of the object "data"
### > class(data)
### [1] "data.frame"
### If your data is not a ".dat" file, alternative import methods are
### ----- ".csv" -----
### data <- read.table("c:/data.csv", header=TRUE,
###                      sep=",", row.names="iden")
### ----- ".csv" -----
### data <- read.csv("data.csv",header=T)
### ----- ".spss" -----
### library(foreign)
### data <- read.spss("c:/data.spss")
### ----- ".dta" -----
### library(foreign)
### data <- read.dta("c:/data.dta")
###
#####

##### - FROM DATA FRAME TO MATRIX - #####
###
### ---- Data frame ----
### The data frame is like a spreadsheet of cases by variables,
### where the variables are the columns, and these have the names
### names( data )
### a spreadsheet view of a data frame is given by the fix() command
### fix( data )
###
### All changes you make in this spreadsheet will be saved automatically,
### so beware.

```

```

###
### As an example create two vectors:
      height <- c( 120, 150, 180, 200, 190, 177, 170, 125, 141, 157 )
      weight <- c( 11, 14, 17, 18, 17, 18, 11, 12, 10, 15 )
### collect these in a data frame
      data <- data.frame( height, weight )
### and look at the results
      data
### The columns of a data frame may be extracted using a "$" sign and their names.
### For example:
names( data )
data$height
### Or by "[]" and column number, e.g.
data[1]
      data[ , 1]
      data[ 1, ]

### ---- Matrix -----
### A "matrix" is a numeric object ordered like a matrix with dimensions
### ( dim() ) given by the number of rows and columns, e.g.
dim( friend.data.w1 )

### If you wish to play around with a copy of the matrix, e.g. having the name "data",
### you can make the copy by the command
data <- friend.data.w1
### the element of a matrix called data that is in row 2 and column 3 is given by
data[ 2, 3 ]
### the first three rows of a matrix called data are given by
data[ 1:3, ]
### columns 2, 5, and 6 are given by
data[ , c( 2, 5, 6 ) ]

### ---- Converting data frame to matrix -----
###
### Most classes can be converted to other classes through "as.typeofclass ()", e.g.
      data <- as.matrix( data )
### converts a data frame "data" to a matrix "data"

#####

##### - EXAMPLE FOR ARC LIST - #####
###
### If data (e.g. "arclistdata.dat") is in arclist format, with columns
### sender id, receiver id, value of tie, wave.
ArcList <- read.table( "arclistdata.dat", header=FALSE ) # creates data frame
names(ArcList) <- c( "sid", "recid", "bff", "wid" ) # adds names to columns
ArcList <- with( ArcList, ArcList[ order( sid, recid, wid), ] )

### Create a separate set of records for each wave
### (code needs to be customized for each selected wave set)
### Select by wave, only for recievers where nominee is "best friend" (bff)
### (NOTE: does not account for 0's, i.e. no bff's chosen. Done later.)

```

```

SAff.1 <- with(ArcList, ArcList[ wid == 1, ] ) #extracts edges in wave 1
SAff.2 <- with(ArcList, ArcList[ wid == 2, ] ) #extracts edges in wave 2
SAff.3 <- with(ArcList, ArcList[ wid == 3, ] ) #extracts edges in wave 3
n <- 50 # this is the number of nodes which is not provided by the arclist

### and has to be reported separately for each of the waves
### (you may loop over the waves if you like),

### The package "sna" has functions to transform adjacency or arc lists into
### matrices and vice versa

library(sna)

### For transforming a matrix into an adjacency list

(friend.data.w1.arclist <- as.edgelist.sna(friend.data.w1))

### For transforming an arclist into a matrix
## First remove the fourth column indicating the wave, so that we are left
## with sender, receiver and value of the tie, and make it into matrix format
SAff.1.copy <- SAff.1[,1:3]
SAff.1.copy <- as.matrix(SAff.1.copy)
## Change the names to make them usable by "sna"
colnames(SAff.1.copy) <- c("snd", "rec", "val")
## Specify the number of actors
attr(SAff.1.copy, "n") <- 50
## Transform into matrix
(SAff.1.matrix <- as.sociomatrix.sna(SAff.1.copy))

#####
##### - READING IN PAJEK DATA - #####
###
### If you have data in Pajek format you can use the package "network" in order
### to convert it to a network object. This example is from ?read.paj
###   require( network )
###
###   par( mfrow = c( 2, 2 ) )
###
###   test.net.1 <- read.paj(
###       "http://vlado.fmf.uni-lj.si/pub/networks/data/GD/gd98/A98.net" )
###   plot( test.net.1, main = test.net.1$gal$title )
###   test.net.2 <- read.paj(
###       "http://vlado.fmf.uni-lj.si/pub/networks/data/mix/USAir97.net" )
###   plot( test.net.2, main = test.net.2$gal$title )
###
#####

# Before we work with the data, we want to be sure it is correct. A simple way
# to check that our data is a matrix is the command class()

class( friend.data.w1 )

# to list the properties of an object attributes( friend.data.w1 )
# (different classes have different attributes)

```

```

# To check that all the data has been read in, we can use the dim() command.
# The adjacency matrix should have the same dimensions as the original data
# (here, 50 by 50).

      dim(friend.data.w1)
      dim(drink)

# To check the values are correct, including missing values, we can use
# the following commands to tabulate the variables.

      table( friend.data.w1, useNA = 'always' )
      table( friend.data.w2, useNA = 'always' )
      table( friend.data.w3, useNA = 'always' )
      table( drink, useNA = 'always' )
      table( smoke, useNA = 'always' )

# NA is the R code for missing data (Not Available).
# This data set happens to have no missings
# (see the data description on the Siena website).
# If there are any missings, it is necessary to tell R about the missing data codes.
# Let us do as if the missing codes for the friendship network were 6 and 9.
# This leads to the following commands.
# (For new R users: the c() function used here as "c(6,9)" constructs
# a vector [c for column] consisting of the numbers 6 and 9.
# This function is used a lot in basic R.)

      friend.data.w1[ friend.data.w1 %in% c(6,9) ] <- NA
      friend.data.w1[ friend.data.w2 %in% c(6,9) ] <- NA
      friend.data.w1[ friend.data.w3 %in% c(6,9) ] <- NA

# A visual inspection of the adjacency matrices can sometimes be useful.
# This will, for example, help in highlighting outliers with respect to
# outdegrees or indegrees, if there are any of such outliers.
# This requires package "sna":

      library( network )
      library( sna )
      net1 <- as.network( friend.data.w1 )
      net2 <- as.network( friend.data.w2 )
      net3 <- as.network( friend.data.w3 )
      plot.sociomatrix( net1, drawlab = F, diaglab = F, xlab = 'friendship t1' )
      plot.sociomatrix( net2, drawlab = F, diaglab = F, xlab = 'friendship t2' )
      plot.sociomatrix( net3, drawlab = F, diaglab = F, xlab = 'friendship t3' )

# The class,
class( net1 )
# with attributes
attributes( net1 )
# has special methods associated with it.
# while plot( friend.data.w1 ) only produces a rather dull plot of
# the first two columns
#       plot( net1, xlab = 'friendship t1' )
# produces a nice sociogram

```

```
##### - SELECTING SUBSETS OF DATA - #####

# To select a subset of the data based on an actor variable, say,
# those who have the value 2 or 3 on drinking at time 1
# (the possibilities are endless, but hopefully this will serve as a pattern)

use <- drink[, 1] %in% c(2, 3)

# This creates a logical vector which is TRUE for the cases where the condition
# is satisfied. To view or check, display the vectors:

drink[ , 1 ]
use

# and the number of selected cases is displayed by

sum( use )

# or

table( use )

# To have this arrayed more neatly side by side, you can create and display
# a matrix with the desired information,

aa <- matrix(nrow=50, ncol=2)
aa[,1] <- drink[,1]
aa[,2] <- use
aa
#the first column contains the drink level and the second whether this
#level is 2 or 3 (1) or not (0)

# or as a shorter alternative

aa <- cbind(drink[ , 1 ],use)
aa

# Given this selection, submatrices can be formed in case the analyses
# are to be done for this subset only:

friend1.data.w1 <- friend.data.w1[ use, use ]
friend1.data.w2 <- friend.data.w2[ use, use ]
drink1 <- drink[ use, ]

# To check what has changed
net1.1 <- as.network(friend1.data.w1)
plot.network(net1)
plot.sociomatrix( net1,drawlab = F, diaglab = F, xlab = 'friendship t1' )

##### - MORE ON DESCRIPTIVES - #####
#
# Some further descriptives you can do for the data are plotting and
# calculating some statistics.
```

```

    plot( net1, xlab = 'friendship t1' )

# add the attribute drink to the network object

    net1 %v% "drink" <- drink[ , 1 ]

# color the nodes by drink

    plot( net1, vertex.col = "drink", xlab = 'friendship t1' )

# Now let's color the nodes by drink and scale the vertex by degree of nodes!
#
# First calculate degree:

    deg <- rowSums( as.matrix( net1 ) )# NB: rowSums() is define for class matrix

# have a look at the degree distribution

    table( deg, useNA = 'always' )

# Now do the desired plot:

    plot( net1, vertex.col = "drink", vertex.cex = (deg + 1)/1.5 )

# ---- Plot the three waves of data -----

# Add drink to waves 2 and 3
    net2 %v% "drink" <- drink[ , 2 ]
    net3 %v% "drink" <- drink[ , 3 ]
    deg2 <- rowSums( as.matrix( net2 ) )
    deg3 <- rowSums( as.matrix( net3 ) )

# Create a set of panels ( 1 row by 3 columns, or 3 columns by 1 row)

    par( mfrow = c( 1, 3 ) )

# creating three plots after each other will place them in consecutive panels

    plot( net1, vertex.col = "drink", vertex.cex = (deg + 1)/1.5 )
    plot( net2, vertex.col = "drink", vertex.cex = (deg2 + 1)/1.5 )
    plot( net3, vertex.col = "drink", vertex.cex = (deg3 + 1)/1.5 )

# Each time we make a plot the coordinates move - because always
# the starting values are random. We can also save coordinates
# and use them for later plotting:

    par( mfrow = c( 1, 3 ) )
    coordin <- plot( net1, vertex.col = "drink", vertex.cex = (deg + 1)/1.5 )
    plot( net2, coord = coordin, vertex.col = "drink", vertex.cex = (deg2 + 1)/1.5 )
    plot( net3, coord = coordin, vertex.col = "drink", vertex.cex = (deg3 + 1)/1.5 )

# To get coordinates based on all three waves: coordin <- plot( net1 + net2 + net3 )

```

```

# For more plotting options, try the gplot function in the "sna" library

?gplot
?gplot.layout

# ---- Basic network statistics -----

# The package "sna" can be used for a variety of descriptions and analyses.
# The following are examples.
# some important graph level statistics

gden( net1 ) # density
grecip( net1 ) # proportion of dyads that are symmetric
grecip( net1, measure = "dyadic.nonnull" ) # reciprocity, ignoring the null dyads
gtrans( net1 ) # transitivity

# dyad and triad census

dyad.census( net1 )
triad.census( net1 )

# out degree distribution (of course for a symmetric network outdegree=indegree)

outdegree <- degree( net1, cmode = "outdegree" )
outdegree #outgoing ties of each node

hist( outdegree )
quantile( outdegree )

# measures of connectivity and distance

dist <- geodist(net1, inf.replace = Inf, count.paths = TRUE)
# calculate the geodesic distance (shortest path length) matrix
dist$gd
# matrix of geodesic distances
dist$counts
# matrix containing the number of paths at each geodesic between each pair of vertices
dist
reach <- reachability( net1 ) # calculate the reachability matrix
reach

#####
###
### ---- PROCEED TO RscriptSienaVariableFormat.R FOR PREPARING DATA FOR RSIENA -
###
#####

```



```
#####
###
### -- RscriptSienaVariableFormat.R: a script for the introduction to RSiena --
###
###                                version April 11, 2011
#####
#
# The introductory script is divided into the following script files:
# RscriptDataFormat.R, followed by
# RscriptSienaVariableFormat.R, which formats data and specifies the model, and
# RscriptSienaRunModel.R, which runs the model and estimates parameters
# RscriptSienaBehaviour.R, which illustrates an example of analysing the
# coevolution of networks and behaviour
# Written with contributions by Robin Gauthier, Tom Snijders, Ruth Ripley,
# Johan Koskinen, and Paulina Preciado.
#
# This script, RscriptSienaVariableFormat.R, sets up the variables for analysis.
# The manipulations in this script requires that you have gone through the
# first part, "CALLING THE DATA AND PRELIMINARY MANIPULATIONS",
# of the script "RscriptDataFormat.R" beforehand;
# or that you have defined the data and the model by means of the
# siena01Gui() function and have saved and loaded the results,
# as described in Section 2.3.3 of the Siena manual.

#### FORMATING DATA ACCORDING TO THEIR ROLES AS VARIABLES IN A SIENA MODEL ####

# A number of objects need to be created in R, as preparations to letting
# siena07 execute the estimation. This will be indicated by
# A: dependent variables;
# B: explanatory variables;
# C: combination of dependent and explanatory variables;
# D: model specification.

# ---- A. -----
# First we have to create objects for the dependent variables.

# sienaNet creates a Siena network object from a matrix or array or list of
# sparse matrix of triples.
# This object will have the role of a dependent variable in the analysis.
# The name of this network object (here: friendship) will be used
# in the output file.

friendship <- sienaNet(
  array( c( friend.data.w1, friend.data.w2, friend.data.w3 ),
    dim = c( 50, 50, 3 ) ) )

# The integers in the dim() here refer to the number of nodes (senders,
# receivers) and the number of waves.
# This object is an array of dimension 50 x 50 x 3, representing
# three adjacency matrices, with a number of attributes.
# Note that this is an object

class(friendship)
```

```

# with specific attributes and methods associated with it.
# You can get the detailed information by requesting

    dim( friendship )
    attributes( friendship )

# If you only are interested in the value of one particular attribute,
# you can request this by, e.g.,

    attributes( friendship )$type

# The entire contents of the object are listed by typing

#     friendship

# but this gives a lot of output which you may not want,
# hence the # sign in front.

# The function sienaNet can also be used to create a behavior variable object
# with the extra argument type = "behavior".
# (Non-mentioned attributes get the default value, and in this case
# oneMode is the default; see below.)

# The 'drink' data (created in RscriptDataFormat.R ) is made available as a
# dependent behavior variable by the function

    drinkingbeh <- sienaNet( drink, type = "behavior" )

# the class, class(drinkingbeh), is still sienaNet

# (NB: only use the variable in ONE role in a given model:
#   behavior variable or changing covariate!)

# The options available for a sienaNet object are displayed when typing

    ?sienaNet

# This shows that next to one-mode (unipartite) and behavior dependent variables,
# also two-mode (bipartite) dependent variables are possible.
# You can infer that oneMode is the default type from the fact
# that it is mentioned first.

# To create bipartite network objects you need two node sets and must create
# the node sets too. The following is an example
# (not really meaningful, just for the syntax):

    bfriendship <- sienaNet(array(c(friend.data.w1, friend.data.w2, friend.data.w3),
                                dim=c(50, 50, 3)),
                           "bipartite", nodeSet=c("senders", "receivers"))
    senders <- sienaNodeSet(50, nodeSetName="senders")
    receivers <- sienaNodeSet(50, nodeSetName="receivers")

# ---- B. -----
# Second we construct objects for the explanatory (independent) variables.

```

```

# From the help request
#       ?sienaDataCreate
# we see that these can be of five kinds:
# coCovar          Constant actor covariates
# varCovar         Time-varying actor covariates
# coDyadCovar      Constant dyadic covariates
# varDyadCovar     Time-varying dyadic covariates
# compositionChange Composition change indicators

# You can get help about this by the following requests:
#       ?coCovar
#       ?varCovar
#       ?coDyadCovar
#       ?varDyadCovar
#       ?sienaCompositionChange

# The variables available for this data set all are changing actor covariates.
# For illustrative purposes, we use smoking as observed at the first wave
# as a constant covariate:

smoke1 <- coCovar( smoke[ , 1 ] )

# This selects the first column of smoke,
# which contains the first wave observations,
# and makes it available as a constant covariate.
# This is the pattern for for every covariate file, e.g.
#       Attr1 <- coCovar( Covariate1 )
# where Covariate1 is a matrix with dim(Covariate1) equal to n x 1
# Note, if Covariates is a matrix with dim(Covariates) equal to n x p
# you can create constant covariates through
#       Attr1 <- coCovar(Covariates[,1])
#       ...
#       Attrk <- coCovar(Covariates[,k])

# We use the drinking data as a changing covariate.
# The function varCovar creates a changing covariate object from a matrix;
# the name comes from 'varying covariate'.

alcohol <- varCovar( drink )

# You need at least 3 waves of a varying covariate to use it as varCovar as
# the previous wave is used as a predictor of the next wave.

# The command

attributes( alcohol )

# will tell you the information that RSiena now has added to the drink data.

# ---- C. -----
# We now combine the dependent and independent variables.
# The function sienaDataCreate creates a Siena data object from input networks,
# covariates and composition change objects;
# the objects that earlier were created by sienaNet will have the role

```

```

# of dependent variables, and similarly the other roles are predetermined
# by creation by the functions coCovar, varCovar,
# coDyadCovar, varDyadCovar, and sienaCompositionChange.

mydata <- sienaDataCreate( friendship, smoke1, alcohol )

# You should now understand how the result of this differs from the
# result of
# mybehdata <- sienaDataCreate( friendship, smoke1, drinkingbeh

# If you would like to use different names, you could request this as follows:
# mydata <- sienaDataCreate( nominations = friendship, smoke1,
# drinking = alcohol )

# For bipartite networks you would have to specify the node sets, e.g.,

mybidata <- sienaDataCreate(bfriendship, alcohol,
                           nodeSets=list(senders, receivers))

# but we will not use this in these scripts.
# This finishes the data specification. Now we have to specify the model.
#

# ---- D. -----
#####
###
### ---- DEFINING EFFECTS -----
###
#####
# The data set as combined in mydata implies a certain set of effects
# that can be included in the specification of the model.
# The function getEffects creates a dataframe of effects with a number of extra
# properties for use in RSiena:

myeff <- getEffects( mydata )

# mydata is needed as an argument as the effects depend on the number
# and types of covariates and dependent variables.
# Before we explain the object myeff and how we shall be going to use it,
# we first produce a data description which is available now:

print01Report( mydata, myeff, modelname = 's50_3_init' )

# This writes a basic report of the data to the file
# s50_3_init.out in the current working directory. Locate and open it!
# Inspecting this is important because it serves as a check and also contains
# a number of descriptives.
# In this description you can see that the third wave data for alcohol are not used.
# This is because changing covariates are assumed to be constant from one wave until
# immediately before the next wave, so that the values for the last wave are ignored.

# Let us now consider the myeff object, which is used to specify the model.
# It is of the class "sienaEffects", and contains the model specification.
# You can inspect the current model specification by simply requesting

```

```

myeff

# For starting, the model specification is just a very limited default
# (including rates of change, outdegree and reciprocity only)
# To make a meaningful analysis, you will need to add to it.

# The rows of myeff correspond to the effects.
# By requesting

      names( myeff )

# you see the type of information that is stored about the effects,
# i.e., the columns (variables) defined for the effects.
# If desired, more information about these variables can be obtained
# from the help files:
#      ?getEffects

# Among these variables is the effectName.
# The set of available effects can be inspected by requesting their names:

      myeff$effectName

# This gives a lot of names: all effects defined in Section 12 of the manual,
# depending on the variables specified in mydata.
# The "include" column defines whether effects are included in the model.

      myeff$include

# Here the TRUE values correspond to the default model specification which,
# however, is not meant as a serious model, being too limited.
# There are 3 main ways to operate on myeff.
# 1. Changing myeff in spreadsheet form by the function fix();
# 2. Changing myeff directly by operating on its elements;
# 3. Using RSiena functions "includeEffects", "setEffects", etc.
# Which one to use is a matter of personal preference.
# The third way is most in line with the design philosophy of R.
# We suggest that you skip the explanations of options 1 and 2, and proceed
# directly to option 3, ' Adding/removing effects using includeEffects'.

# For identifying your effects you need the "shortName"s,
# which can be read in the manual (section "Mathematical definition of effects"),
# or obtained from the "sink" command below.

# ---- 1. Adding/removing effects using fix() -----
# fix calls a data editor internal to R, so we can manually edit the effects.
# This operates the same as in the Gui.

      fix( myeff )

# How to use fix() is presented merely for getting to know what myeff is.
# In practical analysis it is more convenient
# to use routine "includeEffects" instead, as explained below.
# fix() may not be usable if you do not have tcl/tk available!

```

```

# Note that the top of the dataframe shows the names of the columns:
# name, effectName, etc.
# You can edit the "include" column by changing the TRUE and FALSE values
# as required; when the editor is closed, the new values are stored.

# ---- 2. Adding/removing effects by direct manipulation of myeff -----
# Alternatively we can edit the dataframe directly by using R functions.
# You are advised to skip this part ("2.") at first reading,
# and read it only if you wish to get more understanding
# of the internal structure of the effects object.
# The commands below are used to set "include" to TRUE or FALSE,
# as an alternative to using the data editor.
# The "include" column with values TRUE or FALSE will always be
# located at the 9th column,
# but transitive triplets will not always be at the 13th row as this depends
# on the number of periods and variables; further, the list of available effects
# may change in future versions.
# Note: These row numbers may not be the current ones, as they depend on the
# list of effects implemented, which is changeable.
# Some examples are the following
# (preceded by # because not proposed to be applied).

#myeff[13,9] <- TRUE    #transitive triples
#myeff[17,9] <- TRUE    #3 cycles
#myeff[19,9] <- TRUE    #transitive ties
#myeff[29,9] <- TRUE    #indegree popularity (sqrt)
#myeff[33,9] <- TRUE    #outdegree popularity (sqrt)
#myeff[35,9] <- TRUE    #indegree based activity (sqrt)
#myeff[37,9] <- TRUE    #outdegree based activity (sqrt)
#myeff[46,9] <- TRUE    #indegree-indegree assortativity
#myeff[69,9] <- TRUE    #alcohol alter
#myeff[73,9] <- TRUE    #alcohol ego
#myeff[75,9] <- TRUE    #alcohol similarity
#myeff[83,9] <- TRUE    #alcohol ego x alcohol alter

# But in other choices of data, the effect numbers will change.
# This is a reason why this is not a convenient method.
# The following methods require more typing the first time,
# but can be re-used much more robustly.
# Several variants are given, so that you can use what suits you best.
# We give a small and meaningful model.

# To understand the R commands, recall that myeff is a matrix,
# i.e., a two-dimensional array,
# and myeff[i,j] refers to row/effect i and its characteristic j.
# A file with the effect names, for easy access to their exact wordings,
# is obtained by the following commands.
# The function sink diverts output to a file;
# the last command sink() directs it to the console again.
# The function cbind combines two columns into a matrix,
# and is used here to get effect names and short names next to each other.

sink("effectlist.txt")
cbind( myeff$effectName,myeff$shortName)

```

```

sink()

# Another way to get this information is by the command

# write.table(format(cbind( myeff$effectName,myeff$shortName)), "effectlist.txt")

# Now look in the file "effectlist.txt" (in the current directory)
# for the spelling of the various effects you might wish to use.
# The following commands can be used to select the
# five mentioned effects.
# Note that == is the logical "equals", & is the logical "and",
# and what is between the square brackets [...] makes a selection
# of the specified row and column of the "myeff" data frame.

myeff[myeff$effectName=='transitive triplets' &
      myeff$type=='eval', 'include'] <- TRUE
myeff[myeff$effectName=='3-cycles' &
      myeff$type=='eval', 'include'] <- TRUE
myeff[myeff$effectName=='smoke1 similarity' &
      myeff$type=='eval', 'include'] <- TRUE
myeff[myeff$effectName=='alcohol alter' &
      myeff$type=='eval', 'include'] <- TRUE
myeff[myeff$effectName=='alcohol ego' &
      myeff$type=='eval', 'include'] <- TRUE
myeff[myeff$effectName=='alcohol ego x alcohol alter' &
      myeff$type=='eval', 'include'] <- TRUE

# You can similarly add other ones.
# If you make a typing error in the effect name, there will be no warning,
# but also no consequence of your command.
# Therefore it is good to check the results,
# by requesting the list of effects now included in the model:

myeff

# ---- 3. Adding/removing effects using includeEffects -----
# A third way of specifying the model is by the includeEffects function.
# This function uses short names instead of full names.
# The short names are listed in the descriptions given in
# Section 12 of the manual.
# A list of the short names can also be obtained by

sink("effectshortlist.txt")
myeff$shortName
sink()

# A more general table of effect information including short names
# is also available as a pdf file in the R directory, and can be opened by

RShowDoc("effects", package="RSiena")

# or created and opened as a html file in the current directory by the function

# effectsDocumentation()

```

```

# For illustration, let us start from scratch with a new sienaEffects object,
# and add the transitive triples and 3-cycles effects

myeff <- getEffects( mydata )
myeff <- includeEffects( myeff, transTrip, cycle3 )

# Note that we can set several effects in one go!
# To remove: myeff[ myeff$shortName == '<<shortName>>', ]$include <- FALSE
# e.g. if
#   myeff <- includeEffects( myeff, cycle3 )
# and you want to remove this effect
#   myeff[ myeff$shortName == 'cycle3', ]$include <- FALSE
# Or, more conveniently, switch "include" to FALSE to turn off an effect.
#   myeff <- includeEffects( myeff, cycle3, include = FALSE )

# Check again which effects you have included:

myeff

# ---- Adding/removing covariate related effects -----
# The short names do not differentiate between the covariates:
# e.g., the effects 'alcohol ego' and 'smoke1 ego' both have short name 'egoX',
# and the command

myeff <- includeEffects( myeff, egoX )

# results in a message that does not (like the earlier one)
# confirm the newly included effect.
# The covariates are indicated by the variable "interaction1"
# in the sienaEffects object,
# and this has to be mentioned to include these effects:

myeff <- includeEffects( myeff, egoX, altX, egoXaltX,
                        interaction1 = "alcohol" )
myeff <- includeEffects( myeff, simX, interaction1 = "smoke1" )

# We check the results again:

myeff

# By looking at the help offered by

?includeEffects

# you can see how to include endowment effects and how to exclude effects.

# ---- Creating interactions -----
# As a special topic, let us show how interaction effects are created.

# A convenient method to include an interaction is offered by the
# includeInteraction function. The interaction between smoke1 ego
# and reciprocity, for instance, can be defined by the command

```



```

myeff <- includeInteraction( myeff, egoX, recip, include = FALSE,
                             interaction1 = "smoke1" )

# and, e.g., an interaction between smoke1 ego and alcohol ego is defined by

#       myeff <- includeInteraction( myeff, egoX, egoX, include = FALSE,
#       interaction1 = c( "smoke1", "alcohol" ) )

# where we now specified "include = FALSE" because we wish to make this effect
# available without using it in the model to be estimated below.

# Note that the keyword 'interaction1' used by RSiena is used for identifying
# the covariate for which the ego effect is selected, and does not
# refer to the interaction effect itself.

# A second special topic is how to access other characteristics of effects
# without referring to the effect numbers.
# This can be done by the setEffect function.
# E.g., the dense triads effects
# counts the number of triplets with at least xx ties,
# where xx is the parameter of the effect, which can be 5 or 6
# (note that 6 is the maximum number of ties in a triplet).
# The default is 5. This is changed to 6 by the command

myeff <- setEffect(myeff, denseTriads, include = FALSE, parameter = 6)

# The 'parameter' keyword refers to the effect parameter, described in
# Section 12 of the manual.

#####
###
### ---- PROCEED TO RscriptSienaRunModel.R FOR PREPARING DATA FOR RSiena ----
###
#####

#####
###
### ---- RscriptSienaRunModel.R: a script for the introduction to RSiena ----
###
###
###                               version April 11, 2011
#####
#
# The introductory script is divided into the following script files:
# RscriptDataFormat.R, followed by
# RscriptSienaVariableFormat.R, which formats data and specifies the model, and
# RscriptSienaRunModel.R, which runs the model and estimates parameters
# RscriptSienaBehaviour.R, which illustrates an example of analysing the
# coevolution of networks and behaviour.
# Written with contributions by Robin Gauthier, Tom Snijders, Ruth Ripley,
# Johan Koskinen, and Paulina Preciado.
#
# This script, RscriptSienaRunModel.R, runs the estimation in RSiena for the
# model set up and defined in the script RscriptSienaVariableFormat.R.

```

```

#
# A quick version of the model fitting without comments is given at the end
# of this script

##### ESTIMATION OF PARAMETERS #####

# Parameters of the model are estimated by the function siena07.
# This requires the data specification; the effects specification;
# and a number of parameters, or settings, for the estimation algorithm.
# The latter are contained in an object created by the function sienaModelCreate.
# You can look at the help provided by ?sienaModelCreate
# to find out about options that you may use here;
# for beginning users, only the two options mentioned below are relevant.
#
# Output will be written to a file with name projname.out, where projname is
# whatever name is given; the default (used if no name is given) is Siena.
# This file will be written to your current directory.
# New estimation runs will append to it.
# A new call to print01Report will overwrite it!

      mymodel <- sienaModelCreate(useStdInits = FALSE, projname = 's50_3')

# The useStdInits parameter determines the initial values used for
# the estimation algorithm.
# If useStdInits = TRUE, standard initial values are used;
# if useStdInits = FALSE, the initial values are used that are contained
# in the "initialValue" column of the effects object,
# which were reported above by the information request
#      myeff
# Below we shall see how these initial values can be altered.

# The function siena07 actually fits the specified model to the data
# If you wish the pretty picture of Siena on the screen as information
# about the progress of the algorithm, type

      ans <- siena07( mymodel, data = mydata, effects = myeff)

# (ans for "answer").
# If however you do not want the pretty picture, or if this leads to
# difficulties (which may happen e.g. on a Mac), then type

#   ans <- siena07(mymodel, data=mydata, effects=myeff, batch=TRUE)

# and intermediate information will be written to the console.

# Function siena07 produces a so-called sienaFit object, here called ans;
# and it fills in a few things in the sienaEffects object myeff,
# if this is the first use of myeff in a siena07 call.
# By using various different effects objects, i.e., with different names,
# you can switch between specifications.

# The batch = FALSE parameters will give a graphical user interface being opened
# which reports on the progress of the estimation algorithm;

```

```

# verbose = TRUE leads to extensive diagnostic information being sent
# to the console during the estimation, and results after the estimation
# (these results are also copied to the output file projname.out, mentioned above);
# while batch=TRUE gives only a limited amount of printout sent to the console
# during the estimation (which is seen when clicking in the console,
# or more immediately if the Buffered Output is deselected in the Misc menu)
# which monitors the progress of the estimation algorithm in a different way.

# The call of siena07 leads to output in the file s50_3.out
# (or more generally projname.out,
# where projname is the name given in sienaModelCreate)
# and to the creation of the object which here is called ans (for "answer").

# To use multiple processors, in the simplest case where your computer has 2
# processors, use

#       ans <- siena07( mymodel, data = mydata, effects = myeff, batch = TRUE,
#                       verbose = TRUE, nbrNodes = 2, useCluster = TRUE)

# Adjust the nbrNodes to the number available.
# If you wish to work on with other programs while running siena07,
# it is advisable to use one node less than the number of available processors.
# If you wish to use other machines as well,
# see the more detailed instructions below.
# You will then need to use the clusterString argument as well.
#
# For more advanced use, it can be helpful to have access to the networks
# simulated in the so-called third phase of the estimation algorithm.
# These networks can be used, e.g., for checking goodness of fit.
# This can be achieved by using the parameter returnDeps=TRUE.
# The fitted object ans will then have a component named "sims"
# which contains a list (each iteration) of lists (each data object)
# of lists (each dependent network or behavior variable) of edgelist for
# networks or vectors for behavior variables.
#
# This option when used with multiple processors would require
# rather a lot of communication between multiple processes,
# slowing down the computations,
# so it might be better to avoid using the two options together.

##### LOOKING AT THE RESULTS #####

# The file "s50_3.out" will contain the results of the estimation.
# It is contained in the current directory ("getwd()").
# This file can be read by any text editor.
# A summary of the results is obtained on the screen by

      ans

# and a larger summary by

      summary(ans)

# Depending on the random seed and the model specification,

```

```

# the results could be something like the following.

# Estimates, standard errors and t-statistics for convergence
#
#
#               Estimate   Standard   t statistic
#               Error
#
# Rate parameters:
#   0.1      Rate parameter period 1   6.5644 ( 1.1020 )
#   0.2      Rate parameter period 2   5.1981 ( 0.8611 )
#
# Other parameters:
#   1. eval outdegree (density)      -2.7027 ( 0.1253 ) -0.0025
#   2. eval reciprocity              2.3894 ( 0.2157 ) -0.0335
#   3. eval transitive triplets      0.6111 ( 0.1392 ) -0.0247
#   4. eval 3-cycles                 -0.0069 ( 0.2731 ) 0.0126
#   5. eval smoke1 similarity         0.2595 ( 0.2107 ) 0.0144
#   6. eval alcohol alter            -0.0195 ( 0.0699 ) -0.0155
#   7. eval alcohol ego              0.0374 ( 0.0801 ) -0.0681
#   8. eval alcohol ego x alcohol alter 0.1297 ( 0.0527 ) -0.0001
#

# The results can also be viewed externally in the output file s50_3.out
# It is advisable that you have a look at all three reports and
# understand how information is organized in each of them.

# To understand the table above, note that the "t statistic"
# is the t-statistic for convergence checking,
# not the t statistic for testing the significance of this effect!
# (See Section 6.2 of the manual.)
# In the external output file, these are called
# "t-ratios for deviations from targets".
# The rule of thumb is that all t-ratios for convergence
# should ideally be less than 0.1 in absolute value;
# this signifies good convergence of the algorithm.
# In the example here, this is the case.
# If this would not be the case, the best thing to do would be
# to continue the estimation, using the estimates produced here,
# and contained in ans, as the new initial values.
# This is explained below.

# With function siena07 we made ans as the object containing
# all the results of the estimation. For example,

      ans$theta

# contains the vector of parameter estimates while

      ans$covtheta

# contains the covariance matrix of the estimates.
# There are several "methods" available for viewing the object
# containing the results of the estimation.
# Above we already mentioned

```

```

#      ans
# and
#      summary( ans )
# The command

      xtable( ans )

# will produce a table formatted for inclusion in a LaTeX document
# or formatted in html. Use e.g.

      xtable( ans, type = 'html' )

# to get html, and e.g.

      xtable( ans, file = 'ff.tex' )

# to write the results to a file.
# At http://cran.r-project.org/web/packages/xtable you can find
# a set of vignettes for the xtable package, the xtable gallery,
# which gives more options.

##### MORE ON INITIALIZING PARAMETERS FOR ESTIMATION #####

# If the estimation algorithm has not produced good estimates
# (it 'has not converged well'),
# as will be indicated by some of the t-ratios for convergence
# being larger than 0.1 (this threshold is not to be taken too precisely, though),
# the best thing to do is continuing the estimation,
# using the estimates produced here,
# and contained in ans, as the new initial values.
# This is done by the option prevAns ('previous ans') as in

      ans <- siena07(mymodel, data=mydata, effects=myeff, prevAns=ans)

# the parameter estimates in ans then are extracted and
# used in the new estimation,
# and moreover Phase 1 will be omitted from the algorithm,
# as derivatives and covariance matrix are used from the previous run.
# This should be used only if the model specification in myeff
# has not changed, and if the provisional parameter estimates obtained
# in ans are reasonable; if they are not reasonable,
# omit the prevAns option, use
#      mymodel$useStdInits <- TRUE
# to get back on track, and return at the next estimation to
#      mymodel$useStdInits <- FALSE
# To understand what happens here, read on:

# Another and more flexible way for determining initial values is by
# using the useStdInits element of the model object,
# and the initial values in the effects object.
# This is done as follows.
# The option useStdInits = TRUE in sienaModelCreate, will make
# each estimation run start with standard initial values.
# The option useStdInits = TRUE makes the estimation start

```

```

# with the initial values in the effects object.
# You can switch between these by commands such as

#       mymodel$useStdInits <- FALSE
#       mymodel$useStdInits <- TRUE

# Putting the estimates from the results object ans into the
# effects object myeff, if ans used conditional estimation, is done by
#       myeff$initialValue[myeff$include] <- ans$theta
# and if conditional estimation was used, conditioning on the first
# dependent network, by
#       myeff$initialValue[myeff$include] <- c(ans$rate, ans$theta)
# Recall that the function c() combines its arguments into one column vector.
# A check that the effects object contains the new initial values is made by

      myeff

# By using a different vector instead of ans$theta you can
# initialise differently.
# Note that this initial vector will be used until you change it again,
# e.g., to the results of a new run,
# or until you change the useStdInits option.
# Also note that you should do this before changing the model,
# because else the vectors will have incompatible lengths.

#####
###
### ---- Testing effects -----
###
#####
#
# Two types of tests are available in SIENA.
# 1. t-type tests of single parameters can be carried out by dividing
# the parameter estimate by its standard error.
# Under the null hypothesis that the parameter is 0, these tests have
# approximately a standard normal distribution.
# 2. Score-type tests of single and multiple parameters are described
# in the manual.
# Parameters can be restricted by putting TRUE in the
# include, fix and test columns of the effects object.
# For example, to request a score test for the indegree popularity effect,
# the commands can be as follows.

#       myeff <- setEffect(myeff, inPopSqrt, fix=TRUE, test=TRUE,
#                           initialValue=0.0)
#       ans <- siena07(mymodel, data=mydata, effects=myeff)

# After such an operation, again request
#       myeff
# to see what you have done.

#####
###

```

```

### ---- Time test -----
###
#####
#
# An application of the score test is given for the special case of parameter
# heterogeneity by Lospinoso et al. (2010) and implemented in RSiena.
# To apply the test to the results obtained above. request, e.g.,
#   tt2 <- sienaTimeTest(ans)
#   plot(tt2, effects=3:4)
# If as a consequence of this analysis you wish to add time dummy terms,
# this may be done via
#   myeff <- includeTimeDummy(myeff, transTrip, cycle3, timeDummy="2")
#   ans3 <- siena07(mymodel, data=mydata, effects=myeff, batch=TRUE)
# and testing again,
#   tt3 <- sienaTimeTest(ans3)
# and so on.

#####
###
### ---- Summary of model fitted -----
###
#####

friend.data.w1 <- as.matrix(read.table("s50-network1.dat")) # read data
friend.data.w2 <- as.matrix(read.table("s50-network2.dat"))
friend.data.w3 <- as.matrix(read.table("s50-network3.dat"))
drink <- as.matrix(read.table("s50-alcohol.dat"))
smoke <- as.matrix(read.table("s50-smoke.dat"))

friend.data.w1[ friend.data.w1 %in% c(6,9) ] <- NA # define missing data
friend.data.w1[ friend.data.w2 %in% c(6,9) ] <- NA
friend.data.w1[ friend.data.w3 %in% c(6,9) ] <- NA

friendship <- sienaNet( array( c( friend.data.w1,
                                friend.data.w2, friend.data.w3 ),
                           dim = c( 50, 50, 3 ) ) )

drinkingbeh <- sienaNet( drink, type = "behavior" )
smoke1 <- coCovar( smoke[ , 1 ] )
alcohol <- varCovar( drink )

mydata <- sienaDataCreate( friendship, smoke1, alcohol )

myeff <- getEffects( mydata )# create effects structure

print01Report( mydata, myeff, modelname = 's50_3_init' )

myeff <- includeEffects( myeff, transTrip, cycle3 )
myeff <- includeEffects( myeff, egoX, altX,
                        egoXaltX, interaction1 = "alcohol" )
myeff <- includeEffects( myeff, simX, interaction1 = "smoke1" )

mymodel <- sienaModelCreate( useStdInits = TRUE, projname = 's50_3' )
ans <- siena07( mymodel, data = mydata, effects = myeff)

```

```
#####
###
### ---- RscriptSienaBehaviour.R: a script for the introduction to RSiena ----
###
###                                     version April 11, 2011
#####
#
# The introductory script is divided into the following script files:
# RscriptDataFormat.R, followed by
# RscriptSienaVariableFormat.R, that formats data and specifies the model, and
# RscriptSienaRunModel.R, that runs the model and estimates parameters
# RscriptSienaBehaviour.R, that illustrates an example of analysing the
# coevolution of networks and behaviour
# Written with contributions by Robin Gauthier, Tom Snijders, Ruth Ripley,
# and Johan Koskinen.
#

# Here is a short script for analysing the co-evolution of the
# friendship network and drinking behaviour for the 50 girls in the
# Teenage Friends and Lifestyle Study data
# (http://www.stats.ox.ac.uk/~snijders/siena/s50\_data.zip), described in
# http://www.stats.ox.ac.uk/~snijders/siena/s50\_data.htm

# Read in the adjacency matrices, covariates and dependent behavioural variable
# assuming data are in current working directory

friend.data.w1 <- as.matrix(read.table("s50-network1.dat"))# network
friend.data.w2 <- as.matrix(read.table("s50-network2.dat"))
friend.data.w3 <- as.matrix(read.table("s50-network3.dat"))
drink <- as.matrix(read.table("s50-alcohol.dat"))# behaviour
smoke <- as.matrix(read.table("s50-smoke.dat"))# covariate

# At this point it is a good idea to use the sna package to plot the networks
# and the behavioural variable. Descriptive measures of the similarity of
# "friends" with respect to behaviour (like Moran's I) are given by the function
# nacf() in the sna package

# Tell RSiena that the adjacency matrices are network data and in what order
# they should be treated

friendship <- sienaNet( array( c( friend.data.w1, friend.data.w2,
                                friend.data.w3 ),
                           dim = c( 50, 50, 3 ) ) )# create dependent variable

# Tell RSiena that the variable "drink" should be treated as a dependent variable

drinkingbeh <- sienaNet( drink, type = "behavior" )

smoke1 <- coCovar( smoke[ , 1 ] )

myCoEvolutionData <- sienaDataCreate( friendship, smoke1, drinkingbeh )

myCoEvolutionEff <- getEffects( myCoEvolutionData )
```



```

# Run reports to check that data is properly formatted and
# to get some basic descriptives

      print01Report( myCoEvolutionData, myCoEvolutionEff,
                     modelname = 's50_3-CoEvinit' )

# Define the effects to include in the coevolution model
# Start with some structural effects (use the shortnames that you find in
# RShowDoc("effects", package="RSiena") )

      myCoEvolutionEff <- includeEffects( myCoEvolutionEff, transTrip, cycle3)

# Include a homophily effect for the constant covariate smoking

      myCoEvolutionEff <- includeEffects( myCoEvolutionEff, simX,
                                          interaction1 = "smoke1" )

# If we want to parse out whether there is a selection or influence (or both)
# effect for drinking behaviour,
# we need to first include sender, receiver and homophily effects
# of drinking for friendship formation:

      myCoEvolutionEff <- includeEffects(myCoEvolutionEff, egoX, altX, simX,
                                          interaction1 = "drinkingbeh" )

# For the influence part, i.e. the effect of the network on behaviour,
# we specify the following effects:
# Now indegree, outdegree and assimilation effects for drinking

      myCoEvolutionEff <- includeEffects( myCoEvolutionEff, name = "drinkingbeh",
                                          avAlt, indeg, outdeg,
                                          interaction1 = "friendship" )

# Check what effects you have decided to include:

      myCoEvolutionEff

# Define the model as data + effects:

      myCoEvModel <- sienaModelCreate( useStdInits = TRUE,
                                       projname = 's50CoEv_3' )

# Estimate model

      ans <- siena07( myCoEvModel, data = myCoEvolutionData,
                     effects = myCoEvolutionEff)

# THE RESULTS

# To look at the results, type

      ans

# or, somewhat more extensive,

```

```

summary(ans)

# Note that the column 't statistic' gives the t-ratio for convergence,
# not the t statistic for testing that the parameter is 0.
# For good convergence, the t-ratios for convergence
# all should be less than .1 in absolute value (see the manual).

# For this small data set, the model for behavior dynamics is over-specified,
# leading to some very large standard errors.
# Running a model modified by
#       myCoEvolutionEff <- includeEffects( myCoEvolutionEff,
#       name = "drinkingbeh", indeg, outdeg,
#       interaction1 = "friendship" ,include = FALSE)
# without degree effects on behaviour gives better results.

```

## 2.5 Outline of estimation procedure

SIENA estimates parameters by the following procedure:

1. Certain statistics are chosen that should reflect the parameter values; the finally obtained parameters should be such that the *expected values* of the statistics are equal to the *observed values*.  
Expected values are approximated as the averages over a lot of simulated networks. Observed values are calculated from the data set. These are also called the *target values*.
2. To find these parameter values, an *iterative stochastic simulation algorithm* is applied.  
This works as follows:
  - (a) In Phase 1, the sensitivity of the statistics to the parameters is roughly determined.
  - (b) In Phase 2, provisional parameter values are updated:  
this is done by simulating a network according to the provisional parameter values, calculating the statistics and the deviations between these simulated statistics and the *target values*, and making a little change (the 'update') in the parameter values that hopefully goes into the right direction.  
(Only a 'hopefully' good update is possible, because the simulated network is only a random draw from the distribution of networks, and not the expected value itself.)
  - (c) In Phase 3, the final result of Phase 2 is used, and it is checked if the average statistics of many simulated networks are indeed close to the target values. This is reflected in the so-called **t statistics for deviations from targets**.

## 2.6 Using multiple processes

1. If multiple processors are available, then using multiple processes can speed up the estimation in `siena07`.
2. In Phases 1 and 3 the simulations are performed in parallel. In Phase 2, multiple simulations are done with the same parameters, and the resulting statistics are averaged. The gain parameter is increased and the number of iterations in phase 2 reduced to take advantage of the increased accuracy.
3. The parameters required to run all processes on one computer are fairly simple: in your call to `siena07`, set `nbrNodes` to the number of processes and `useCluster` and `initC` to `TRUE`. The **Model Options** screen also allows you to specify the number of processors, and will automatically set the other required parameters for you.
4. To use more than one machine is more complicated, but it can be done by using, in addition, the `clusterString` parameter. The computers need to be running incoming `ssh`.
5. For machines with exactly the same layout of R directories on each, simply set `clusterString` to a character vector of the names of the machines.
6. For other cases, e.g. using Macs alongside Linux, see the documentation for the package `snow`.
7. Currently `RSiena` uses sockets for inter-process communication.
8. Each process needs a copy of the data in memory. If there is insufficient memory available there will be no speed gain as too much time will be spent paging.
9. In each iteration the main process waits until all the other processes have finished. The overall speed is therefore that of the slowest process, and there should be enough processors to allow them all to run at speed.

## 2.7 Steps for looking at results: Executing SIENA.

1. Look at the start of the output file for general data description (degrees, etc.), to check your data input.
2. When parameters have been estimated, first look at the **t ratios for deviations from targets**. These are good if they are all smaller than 0.1 in absolute value, and reasonably good if they are all smaller than 0.2.  
We say that the algorithm has converged if they are all smaller than 0.1 in absolute value, and that it has nearly converged if they are all smaller than 0.2.  
These bounds are indications only, and may be taken with a grain of salt.
3. In rare circumstances, when the data set leads to instability of the algorithm, the following may be of use.

The Initial value of the gain parameter determines the step sizes in the parameter updates in the iterative algorithm. This is the parameter called `firstg` in function `sienaModelCreate`. A too low value implies that it takes very long to attain a reasonable parameter estimate when starting from an initial parameter value that is far from the ‘true’ parameter estimate. A too high value implies that the algorithm will be unstable, and may be thrown off course into a region of unreasonable (e.g., hopelessly large) parameter values.

It usually is unnecessary to change this.

4. If all this is of no avail, then the conclusion may be that the model specification is incorrect for the given data set.
5. Further help in interpreting output is in Section 6.4 of this manual.

## 2.8 Giving references

When using SIENA, it is appreciated that you refer to this manual and to one or more relevant references of the methods implemented in the program. The reference to this manual is the following.

Ripley, Ruth M., and Snijders, Tom A.B. 2010. Manual for SIENA version 4.0 (version May 15, 2011). Oxford: University of Oxford, Department of Statistics; Nuffield College. <http://www.stats.ox.ac.uk/siena/>

A basic reference for the network dynamics model is Snijders (2001) or Snijders (2005). Basic references for the model of network-behavior co-evolution are Snijders, Steglich, and Schweinberger (2007) and Steglich, Snijders, and Pearson (2010). A basic reference for the Bayesian estimation is Koskinen and Snijders (2007) and for the maximum likelihood estimation Snijders, Koskinen, and Schweinberger (2010).

More specific references are Schweinberger (2010) for the score-type goodness of fit tests and Schweinberger and Snijders (2007b) for the calculation of standard errors of the Method of Moments estimators. For assessing and correcting time heterogeneity, and associated model selection considerations, refer to Lospinoso, Schweinberger, Snijders, and Ripley (2011).

A tutorial is Snijders, van de Bunt, and Steglich (2010).

## 2.9 Getting help with problems

If you have a problem running RSiena, please read through the following hints to see if any of them help. If not, please send an email to [rsiena-help@lists.r-forge.r-project.org](mailto:rsiena-help@lists.r-forge.r-project.org), or post in the help forum for RSiena in R-forge. You need to be a registered member of R-forge (and possibly of RSiena) to post to a forum, but anyone can send emails (at present!). In your message, please tell us which operating system, which version of R, and which version of RSiena you are using.

For queries about the modelling aspects of SIENA, or interpretation, please continue to use the StOCNET / RSiena mailing list.

**Check your version of RSiena** Details of the latest version available can be found at [http://r-forge.r-project.org/R/?group\\_id=461](http://r-forge.r-project.org/R/?group_id=461). The version is identified by a version number (e.g. 1.0.9) and an R-forge revision number. You can find both the numbers of your current installed version by opening R , and typing `packageDescription("RSiena")`. The version is near the top, the revision number near the end. Both are also displayed at the start of SIENA output files (use `print01Report` to get the relevant output file if you are not using the GUI.)

**Check your version of R** When there is a new version or revision of RSiena it will only be available to you automatically if you are running the most recent major version of R. (You can force an installation if necessary by downloading the tarball or binary and installing from that, but it is better to update your R.)

**Check both repositories** We have two repositories in use for RSiena: CRAN and R-forge. The latest version will always be available from R-forge. (Frequent updates are discouraged on CRAN, so bug-fixes are likely to appear first on R-forge.)

**Installation** When using the repository at R-forge, *install* the package rather than updating it. Then check the version and revision numbers.

## Part II

# Users' manual

### 3 Parts of the program

The operation of the SIENA program is comprised of four main parts:

1. input of basic data description,
2. model specification,
3. estimation of parameter values using stochastic simulation,
4. simulation of the model with given and fixed parameter values.

The normal operation is to start with data input, then specify a model and estimate its parameters, and then continue with new model specifications followed by estimation or simulation. For the comparison of (nested) models, statistical tests can be carried out.

The main output is written to a text file named *pname.out*, where *pname* is the name specified in the call of `sienaModelCreate()`.

## 4 Input data

The main statistical method implemented in SIENA is for the analysis of repeated measures of social networks, and requires network data collected at two or more time points. It is possible to include changing actor variables (representing behavior, attitudes, outcomes, etc.) which also develop in a dynamic process, together with the social networks. As repeated measures data on social networks, at the very least, *two or more data files with digraphs* are required: the observed networks, one for each time point. The number of time points is denoted  $M$ .

In addition, various kinds of variables are allowed:

1. *actor-bound* or *individual variables*, also called *actor attributes*, which can be symbolized as  $v_i$  for each actor  $i$ ; these can be constant over time or changing; the changing individual variables can be dependent variables (changing dynamically in mutual dependence with the changing network) or independent variables (exogenously changing variables; then they are also called individual covariates).
2. *dyadic covariates*, which can be symbolized as  $w_{ij}$  for each ordered pair of actors  $(i, j)$ ; these likewise can be constant over time or changing.

All variables must be available in ASCII ('raw text') data files, described in detail below. It is best to use the 'classical' type of filenames, without embedded blanks and not containing special characters. These files, the names of the corresponding variables, and the coding of missing data, must be made available to SIENA.

Names of variables must be composed of at most 12 characters. This is because they are used as parts of the names of effects which can be included in the model, and the effect names should not be too long.

### 4.1 Digraph data files

Each digraph must be contained in a separate input file. For data specification by the `sienaNet` function, the network must be specified as a matrix. For data specification by the graphical interface `siena01Gui` or by the function `sienaDataCreateFromSession`, edge list formats are also allowed. This can be either the format of the Pajek program, or a raw edge list, here called Siena format. For large number of nodes (say, larger than 100), the edge list format is more efficient in use of computer memory. Data input as edge lists will also be made available by means of the `sienaNet` function (in some future version of StOCNET).

1. *Adjacency matrices.*

The first is an adjacency matrix, i.e.,  $n$  lines each with  $n$  integer numbers, separated by blanks or tabs, each line ended by a hard return. The diagonal values are meaningless but must be present.

Although this section talks only about digraphs (directed graphs), it is also possible that all observed adjacency matrices are symmetric. This will be automatically

detected by SIENA, and the program will then utilize methods for non-directed networks.

The data matrices for the digraphs must be coded in the sense that their values are converted by the program to the 0 and 1 entries in the adjacency matrix. A set of code numbers is required for each digraph data matrix; these codes are regarded as the numbers representing a present arc in the digraph, i.e., a 1 entry in the adjacency matrix; all other numbers will be regarded as 0 entries in the adjacency matrix. Of course, there must be at least one such code number. All code numbers must be in the range from 0 to 9, except for structurally determined values (see below).

This implies that if the data are already in 0-1 format, the single code number 1 must be given. As another example, if the data matrix contains values 1 to 5 and only the values 4 and 5 are to be interpreted as present arcs, then the code numbers 4 and 5 must be given.

## 2. *Pajek format.*

If the digraph data file has extension name `.net`, then the program assumes that the data file has Pajek format. The format required differs from that in the previous versions of SIENA. The file should relate to one observation only, and should contain a list of vertices (using the keyword `*Vertices`, together with (currently) a list of arcs, using the keyword `*Arcs` followed by data lines according to the Pajek rules. These keywords must be in lines that contain no further characters. An example of such input files is given in the `s50` data set that is distributed in the `examples` directory.

## 3. *Siena format.*

An edge list containing three or four columns: from, to, value, wave (optional).

Like the Pajek format, this has the advantage that absent ties (tie variables with the value 0) do not need to be mentioned in the data file.

Missing values must be indicated in the way usual for R, by `NA`.

Although this section talks only about digraphs (directed graphs), it is also possible that all observed ties (for all time points) are mutual. This will be automatically detected by SIENA, and the program will then utilize methods for non-directed networks.

If the data set is such that it is never observed that ties are terminated, then the network dynamics is automatically specified internally in such a way that termination of ties is impossible. (In other words, in the simulations of the actor-based model the actors have only the option to create new ties or to retain the status quo, not to delete existing ties.)

### 4.1.1 Transformation between matrix and edge list formats

The following R commands can be used for transforming an adjacency matrix to an edge list, and back again. If `a` is an adjacency matrix, then the following commands can be used to create the corresponding edge list, called `edges` here.



```
library(Matrix)
tmp <- as(Matrix(a), "dgTMatrix")
edges <- cbind(tmp@i + 1, tmp@j + 1, tmp@x)
```

Similarly, if `edges` is an edge list, then the following commands can be used to create the corresponding adjacency matrix, called `adj`, with  $n$  nodes.

```
# create empty adjacency matrix
adj <- matrix(0, n, n)
# put edge values in desired places
adj[edges[, 1:2]] <- edges[, 3]
```

To check the results, after doing these two operations, the command

```
length(which(a!=adj))
```

should return the value 0.

Note that the basic edge list, `edges`, lacks information as to the size of the adjacency matrix. `tmp` above is a sparse matrix which is in edge list format but includes information on the size of the adjacency matrix, and can be used in a similar way to the original matrix `a` while saving memory space.

#### 4.1.2 Structurally determined values

It is allowed that some of the values in the digraph are structurally determined, i.e., deterministic rather than random. This is analogous to the phenomenon of ‘structural zeros’ in contingency tables, but in SIENA not only structural zeros but also structural ones are allowed. A structural zero means that it is certain that there is no tie from actor  $i$  to actor  $j$ ; a structural one means that it is certain that there is a tie. This can be, e.g., because the tie is impossible or formally imposed, respectively.

Structural zeros provide an easy way to deal with actors leaving or joining the network between the start and the end of the observations. Another way (more complicated but it gives possibilities to represent actors entering or leaving at specified moments between observations) is described in Section 4.7.

Structurally determined values are defined by reserved codes in the input data: the value 10 indicates a structural zero, the value 11 indicates a structural one. Structurally determined values can be different for the different time points. (The diagonal of the data matrix always is composed of structural zeros, but this does not have to be indicated in the data matrix by special codes.) The correct definition of the structurally determined values can be checked from the brief report of this in the output file.

Structural zeros offer the possibility of analyzing several networks simultaneously under the assumption that the parameters are identical. Another option to do this is given in Section 11. E.g., if there are three networks with 12, 20 and 15 actors, respectively, then these can be integrated into one network of  $12 + 20 + 15 = 47$  actors, by specifying that ties between actors in different networks are structurally impossible. This means that the three adjacency matrices are combined in one  $47 \times 47$  data file, with values 10 for all entries

that refer to the tie from an actor in one network to an actor in a different network. In other words, the adjacency matrices will be composed of three diagonal blocks, and the off-diagonal blocks will have all entries equal to 10. In this example, the number of actors per network (12 to 20) is rather small to obtain good parameter estimates, but if the additional assumption of identical parameter values for the three networks is reasonable, then the combined analysis may give good estimates.

In such a case where  $K$  networks (in the preceding paragraph, the example had  $K = 3$ ) are combined artificially into one bigger network, it will often be helpful to define  $K - 1$  dummy variables at the actor level to distinguish between the  $K$  components. These dummy variables can be given effects in the rate function and in the evaluation function (for “ego”), which then will represent that the rate of change and the out-degree effect are different between the components, while all other parameters are the same.

It will be automatically discovered by SIENA when functions depend only on these components defined by structural zeros, between which tie values are not allowed. For such variables, only the ego effects are defined and not the other effects defined for the regular actor covariates and described in Section 5.3. This is because the other effects then are meaningless. If at least one case is missing (i.e., has the missing value data code for this covariate), then the other covariate effects are made available.

When SIENA simulates networks including some structurally determined values, if these values are constant across all observations then the simulated tie values are likewise constant. If the structural fixation varies over time, the situation is more complicated. Consider the case of two consecutive observations  $m$  and  $m + 1$ , and let  $X_{ij}^{\text{sim}}$  be the simulated value at the end of the period from  $t_m$  to  $t_{m+1}$ . If the tie variable  $X_{ij}$  is structurally fixed at time  $t_m$  at a value  $x_{ij}(t_m)$ , then  $X_{ij}^{\text{sim}}$  also is equal to  $x_{ij}(t_m)$ , independently of whether this tie variable is structurally fixed at time  $t_{m+1}$  at the same or a different value or not at all. This is the direct consequence of the structural fixation. On the other hand, the following rule is also used. If  $X_{ij}$  is *not* structurally fixed at time  $t_m$  but it is structurally fixed at time  $t_{m+1}$  at some value  $x_{ij}(t_{m+1})$ , then in the course of the simulation process from  $t_m$  to  $t_{m+1}$  this tie variable can be changed as part of the process in the usual way, but after the simulation is over and before the statistics are calculated it will be fixed to the value  $x_{ij}(t_{m+1})$ .

The target values for the algorithm of the Method of Moments estimation procedure are calculated for all observed digraphs  $x(t_{m+1})$ . However, for tie variables  $X_{ij}$  that are structurally fixed at time  $t_m$ , the observed value  $x_{ij}(t_{m+1})$  is replaced by the structurally fixed value  $x_{ij}(t_m)$ . This gives the best possible correspondence between target values and simulated values in the case of changing structural fixation.

## 4.2 Dyadic covariates

As the digraph data, also each measurement of a dyadic covariate must be contained in a separate input file with a square data matrix, i.e.,  $n$  lines each with  $n$  integer numbers, separated by blanks or tabs, each line ended by a hard return. The diagonal values are meaningless but must be present. Pajek input format is currently not possible for dyadic covariates.

A distinction is made between constant and changing dyadic covariates, where change refers to changes over time. Each constant covariate has one value for each pair of actors, which is valid for all observation moments, and has the role of an independent variable. Changing covariates, on the other hand, have one such value for each period between measurement points. If there are  $M$  waves of network data, this covers  $M - 1$  periods, and accordingly, for specifying a single changing dyadic covariate,  $M - 1$  data files with covariate matrices are needed.

The mean is always subtracted from the covariates. See the section on *Centering*.

### 4.3 Individual covariates

Individual (i.e., actor-bound) variables can be combined in one or more files. If there are  $k$  variables in one file, then this data file must contain  $n$  lines, with on each line  $k$  numbers which all are read as real numbers (i.e., a decimal point is allowed). The numbers in the file must be separated by blanks and each line must be ended by a hard return. There must not be blank lines after the last data line.

Also here, a distinction is made between constant and changing actor variables. Each constant actor covariate has one value per actor valid for all observation moments, and has the role of an independent variable.

Changing variables can change between observation moments. They can have the role of dependent variables (changing dynamically in mutual dependence with the changing network) or of independent variables; in the latter case, they are also called ‘changing individual covariates’. Dependent variables are treated in the section below, this section is about individual variables in the role of independent variables – then they are also called individual covariates.

When changing individual variables have the role of independent variables, they are assumed to have constant values from one observation moment to the next. If observation moments for the network are  $t_1, t_2, \dots, t_M$ , then the changing covariates should refer to the  $M - 1$  moments  $t_1$  through  $t_{M-1}$ , and the  $m$ -th value of the changing covariates is assumed to be valid for the period from moment  $t_m$  to moment  $t_{m+1}$ . The value at  $t_M$ , the last moment, does not play a role. Changing covariates, as independent variables, are meaningful only if there are 3 or more observation moments, because for 2 observation moments the distinction between constant and changing covariates is not meaningful.

Each changing individual covariate must be given in one file, containing  $k = M - 1$  columns that correspond to the  $M - 1$  periods between observations. It is not a problem if there is an  $M$ ’th column in the file, but it will not be read.

The mean is always subtracted from the covariates. See the section on *Centering*.

When an actor covariate is constant within waves, i.e., within each wave it has the same value for all actors; or, more generally, when within each wave it has the same value for all actors within components separated by structural zeros (which means that ties between such components are not allowed), then only the ego effect of the actor covariate is made available. This is because the other effects then are meaningless. This may cause problems for combining several data sets in a meta-analysis (see Section 11). If at least one case is missing (i.e., has the missing value data code), then the other covariate effects

are made available. When analysing multiple data sets in parallel, for which the same set of effects is desired to be included it is therefore advisable to give data sets in which a given covariate has the same value for all actors one missing value in this covariate; purely to make the total list of effects independent of the observed data.

#### 4.4 Interactions and dyadic transformations of covariates

For actor covariates, two kinds of transformations to dyadic covariates are made internally in SIENA. Denote the actor covariate by  $v_i$ , and the two actors in the dyad by  $i$  and  $j$ . Suppose that the range of  $v_i$  (i.e., the difference between the highest and the lowest values) is given by  $r_V$ . The two transformations are the following:

1. *dyadic similarity*, defined by  $1 - (|v_i - v_j|/r_V)$ , and centered so the the mean of this similarity variable becomes 0;  
note that before centering, the similarity variable is 1 if the two actors have the same value, and 0 if one has the highest and the other the lowest possible value;
2. *same V*, defined by 1 if  $v_i = v_j$ , and 0 otherwise (not centered) ( $V$  is the name of the variable). This can also be referred to as *dyadic identity* with respect to  $V$ .

Dyadic similarity is relevant for variables that can be treated as interval-level variables; dyadic identity is relevant for categorical variables.

In addition, SIENA offers the possibility of user-defined two- and three-variable interactions between covariates; see Section 5.6.

#### 4.5 Dependent action variables

SIENA also allows dependent action variables, also called dependent behavior variables. This can be used in studies of the co-evolution of networks and behavior, as described in Snijders, Steglich, and Schweinberger (2007) and Steglich, Snijders, and Pearson (2010). These action variables represent the actors' behavior, attitudes, beliefs, etc. The difference between dependent action variables and changing actor covariates is that the latter change exogenously, i.e., according to mechanisms not included in the model, while the dependent action variables change endogenously, i.e., depending on their own values and on the changing network. In the current implementation only one dependent network variable is allowed, but the number of dependent action variable can be larger than one. Unlike the changing individual covariates, the values of dependent action variables are not assumed to be constant between observations.

Dependent action variables must have nonnegative integer values; e.g., 0 and 1, or a range of integers like 0,1,2 or 1,2,3,4,5. Each dependent action variable must be given in one file, containing  $k = M$  columns, corresponding to the  $M$  observation moments.

If any values are not integers, a warning will be printed on the initial report and the values will be truncated towards zero.

## 4.6 Missing data

SIENA allows that there are some missing data on network variables, on covariates, and on dependent action variables. Missing data in changing dyadic covariates are not yet implemented. Missing data must be indicated by missing data codes, *not* by blanks in the data set.

Missingness of data is treated as non-informative. One should be aware that having many missing data can seriously impair the analyses: technically, because estimation will be less stable; substantively, because the assumption of non-informative missingness often is not quite justified. Up to 10% missing data will usually not give many difficulties or distortions, provided missingness is indeed non-informative. When one has more than 20% missing data on any variable, however, one may expect problems in getting good estimates.

In the current implementation of SIENA, missing data are treated in a simple way, trying to minimize their influence on the estimation results.

The basic idea is the following.

NOTE: This may not be a correct representation. To be modified.

A brief sketch of the procedure is that missing values are imputed to allow meaningful simulations; for the calculation of the target statistics in the Method of Moments, tie variables and actor variables with missings are not used. More in detail, the procedure is as follows.

The simulations are carried out over all variables, as if they were complete. To enable this, missing data are imputed. In the initial observation, missing entries in the adjacency matrix are set to 0, i.e., it is assumed that there is *no* tie; this is done because normally data are sparse, so ‘no tie’ is the modal value of the tie variable. In the further observations, for any variable, if there is an earlier observed value of this variable then the last observed value is used to impute the current value (the ‘last observation carry forward’ option, cf. [Lepkowski \(1989\)](#)); if there is no earlier observed value, the value 0 is imputed. For the dependent behavior variables the same principle is used: if there is a previous observation of the same variable then this value is imputed, if there is none then the observationwise mode of the variable is imputed. Missing covariate data are replaced by the variable’s average score at this observation moment. In the course of the simulations, however, the adjusted values of the dependent action variables and of the network variables are allowed to change.

In order to ensure a minimal impact of missing data treatment on the results of parameter estimation (method of moments estimation) and/or simulation runs, the calculation of the target statistics used for these procedures uses only non-missing data. When for an actor in a given period, any variable is missing that is required for calculating a contribution to such a statistic, this actor in this period does not contribute to the statistic in question. For network and dependent action variables, the tie variable or the actor variable, respectively, must provide valid data both at the beginning and at the end of a period for being counted in the respective target statistics.

## 4.7 Composition change

SIENA can also be used to analyze networks of which the composition changes over time, because actors join or leave the network between the observations. This can be done in two ways: using the method of Huisman and Snijders (2003), or using structural zeros. (For the maximum likelihood estimation option, the Huisman-Snijders method is not implemented, and only the structural zeros method can be used.) Structural zeros can be specified for all elements of the tie variables toward and from actors who are absent at a given observation moment. How to do this is described in subsection 4.1.2. This is straightforward and not further explained here. This subsection explains the method of Huisman and Snijders (2003), which uses the information about composition change in a slightly more efficient way.

For this case, a data file is needed in which the *times of composition change* are given. For networks with constant composition (no entering or leaving actors), this file is omitted and the current subsection can be disregarded.

Network composition change, due to actors joining or leaving the network, is handled separately from the treatment of missing data. The digraph data files must contain all actors who are part of the network at any observation time (denoted by  $n$ ) and each actor must be given a separate (and fixed) line in these files, even for observation times where the actor is not a part of the network (e.g., when the actor did not yet join or the actor already left the network). In other words, the adjacency matrix for each observation time has dimensions  $n \times n$ .

At these times, where the actor is not in the network, the entries of the adjacency matrix can be specified in two ways. First as missing values using missing value code(s). In the estimation procedure, these missing values of the joiners before they joined the network are regarded as 0 entries, and the missing entries of the leavers after they left the network are fixed at the last observed values. This is different from the regular missing data treatment. Note that in the initial data description the missing values of the joiners and leavers are treated as regular missing observations. This will increase the fractions of missing data and influence the initial values of the density parameter.

A second way is by giving the entries a regular observed code, representing the absence or presence of an arc in the digraph (as if the actor was a part of the network). In this case, additional information on relations between joiners and other actors in the network before joining, or leavers and other actors after leaving can be used if available. Note that this second option of specifying entries always supersedes the first specification: if a valid code number is specified this will always be used.

For joiners and leavers, crucial information is contained in the times they join or leave the network (i.e., the times of composition change), which must be presented in a separate input file, the *exogenous events file* described in Section 2.1.

## 4.8 Centering

Individual as well as dyadic covariates are centered by the program in the following way.

For individual covariates, the mean value is subtracted immediately after reading the

variables. For the changing covariates, this is the global mean (averaged over all periods). The values of these subtracted means are reported in the output.

For the dyadic covariates and the similarity variables derived from the individual covariates, the grand mean is calculated, stored, and subtracted during the program calculations. (Thus, dyadic covariates are treated internally by the program differently than individual covariates in the sense that the mean is subtracted at a different moment, but the effect is exactly the same.) Unlike the ‘covariate similarity’ effect, the ‘same covariate’ effect is not centered but keeps its 0-1 values.

The formula for balance is a kind of dissimilarity between rows of the adjacency matrix. The mean dissimilarity is subtracted in this formula and also reported in the output. This mean dissimilarity is calculated by a [formula given in Section 12](#).

## 5 Model specification

After defining the data, the next step is to specify a model.

The model specification consists of a selection of ‘effects’ for the evolution of each dependent variable (network or behavior).

For the longitudinal case, three types of effects are distinguished (see Snijders, 2001; Snijders, van de Bunt, and Steglich, 2010):

- *rate function effects*

The rate function models the speed by which the dependent variable changes; more precisely: the speed by which each network actor gets an opportunity for changing her score on the dependent variable.

Advice: in most cases, start modeling with a constant rate function without additional rate function effects. Constant rate functions are selected by exclusively checking the ‘basic rate parameter’ (for network evolution) and the main rate effects (for behavioral evolution) on the **model specification** screen. (When there are important size or activity differences between actors, it is possible that different advice must be given, and it may be necessary to let the rate function depend on the individual covariate that indicates this size; or on the out-degree.)

- *evaluation function effects*

The evaluation function<sup>7</sup> models the network actors’ satisfaction with their local network neighborhood configuration. It is assumed that actors change their scores on the dependent variable such that they improve their total satisfaction – with a random element to represent the limited predictability of behavior. In contrast to the endowment function (described below), the evaluation function evaluates only the local network neighborhood configuration that results from the change under consideration. In most applications, the evaluation function will be the main focus of model selection.

The network evaluation function normally should always contain the ‘density’, or ‘out-degree’ effect, to account for the observed density. For directed networks, it mostly is also advisable to include the reciprocity effect, this being one of the most fundamental network effects. Likewise, behavior evaluation functions should normally always contain the shape parameter, to account for the observed prevalence of the behavior, and (unless the behavior is dichotomous) the quadratic shape effect, to account more precisely for the distribution of the behavior.

- *endowment function effects*

The endowment function<sup>8</sup> is an extension of the evaluation function that allows to distinguish between new and old network ties (when evaluating possible network changes) and between increasing or decreasing behavioral scores (when evaluating possible behavioral changes). The function models the loss of satisfaction incurred

---

<sup>7</sup>The evaluation function was called *objective function* in Snijders (2001)

<sup>8</sup>The endowment function is similar to the *gratification function* in Snijders (2001)



when existing network ties are dissolved or when behavioral scores are decreased to a lower value (hence the label ‘endowment’).

For a number of effects, the endowment function is implemented not for the Method of Moments estimation method, but only for Maximum Likelihood and Bayesian estimation. This is indicated in Section 12.

Advice: start modeling without any endowment effects, and add them at a later stage. Do not use endowment effects for behavior unless the behavior variable is dichotomous.

The estimation and simulation procedures of SIENA operate on the basis of the model specification which comprises the set of effects included in the model as described above, together with the current parameter values. After data input, the constant rate parameters and the density effect in the network evaluation function have default initial values, depending on the data. All other parameter values initially are 0. The estimation process changes the current value of the parameters to the estimated values. Values of effects not included in the model are not changed by the estimation process. It is possible for the user to change parameter values and to request that some of the parameters are fixed in the estimation process at their current value.

### 5.1 Important structural effects for network dynamics: one-mode networks

For the structural part of the model for network dynamics, for one-mode (or unipartite) networks, the most important effects are as follows. The mathematical formulae for these and other effects are given in Section 12. Here we give a more qualitative description.


A default model choice could consist of (1) the out-degree and reciprocity effects; (2) one network closure effect, e.g. transitive triplets or transitive ties; the 3-cycles effect; (3) the in-degree popularity effect (raw or square root version); the out-degree activity effect (raw or square root version); and either the in-degree activity effect or the out-degree popularity effect (raw or square root function). The two effects (1) are so basic they cannot be left out. The two effects selected under (2) represent the dynamics in local (triadic) structure; and the three effects selected under (3) represent the dynamics in in- and out-degrees (the first for the dispersion of in-degrees, the second for the dispersion of out-degrees, and the third for the covariance between in- and out-degrees) and also should offer some protection, albeit imperfect, for potential ego- and alter-effects of omitted actor-level variables.

The basic list of these and other effects is as follows.

1. The *out-degree effect* which always must be included.
2. The *reciprocity effect* which practically always must be included.
3. There is a choice of four network closure effects. Usually it will be sufficient to express the tendency to network closure by including one or two of these. They can be selected by theoretical considerations and/or by their empirical statistical


significance. Some researchers may find the last effect (distances two) less appealing because it expresses network closure inversely.

- a. The *transitive triplets effect*, which is the classical representation of network closure by the number of transitive triplets. For this effect the contribution of the tie  $i \rightarrow j$  is proportional to the total number of transitive triplets that it forms – which can be transitive triplets of the type  $\{i \rightarrow j \rightarrow h; i \rightarrow h\}$  as well as  $\{i \rightarrow h \rightarrow j; i \rightarrow j\}$ ;



- b. The *balance effect*, which may also be called *structural equivalence with respect to outgoing ties*. This expresses a preference of actors to have ties to those other actors who have a similar set of outgoing ties as themselves. Whereas the transitive triplets effect focuses on how many same choices are made by ego (the focal actor) and alter (the other actor) — the number of  $h$  for which  $i \rightarrow h$  and  $j \rightarrow h$ , i.e.,  $x_{ih} = x_{jh} = 1$  where  $i$  is ego and  $j$  is alter —, the balance effect considers in addition how many the same non-choices are made —  $x_{ih} = x_{jh} = 0$ .
- c. The *transitive ties effect* is similar to the transitive triplets effect, but instead of considering for each other actor  $j$  how many two-paths  $i \rightarrow h \rightarrow j$  there are, it is only considered whether there is at least one such indirect connection. Thus, one indirect tie suffices for the network embeddedness.
- d. The *number of actors at distance two effect* expresses network closure inversely: stronger network closure (when the total number of ties is fixed) will lead to fewer geodesic distances equal to 2. When this effect has a negative parameter, actors will have a preference for having few others at a geodesic distance of 2 (given their out-degree, which is the number of others at distance 1); this is one of the ways for expressing network closure.

4. The *three-cycles effect*, which can be regarded as generalized reciprocity (in an exchange interpretation of the network) but also as the opposite of hierarchy (in a partial order interpretation of the network). A negative three-cycles effect, together with a positive transitive triplets or transitive ties effect, may be interpreted as a tendency toward local hierarchy. The three-cycles effect also contributes to network closure.



In a non-directed network, the three-cycles effect is identical to the transitive triplets effect.

5. Another triadic effect is the *betweenness effect*, which represents brokerage: the tendency for actors to position themselves between not directly connected others, i.e., a preference of  $i$  for ties  $i \rightarrow j$  to those  $j$  for which there are many  $h$  with  $h \rightarrow i$  and  $h \not\rightarrow j$ .


- ⊙ The following eight degree-related effects may be important especially for networks where degrees are theoretically important and represent social status or other features important for network dynamics; and/or for networks with high dispersion in in- or out-degrees (which may be an empirical reflection of the theoretical importance of the degrees). Include them if there are theoretical reasons for doing so, but only in such cases.
- 6. The *in-degree popularity effect* (again, with or without ‘sqrt’, with the same considerations applying) reflects tendencies to dispersion in in-degrees of the actors; or, tendencies for actors with high in-degrees to attract extra incoming ties ‘because’ of their high current in-degrees.
- 7. The *out-degree popularity effect* (again, with or without ‘sqrt’, with the same considerations applying) reflects tendencies for actors with high out-degrees to attract extra incoming ties ‘because’ of their high current out-degrees. This leads to a higher correlation between in-degrees and out-degrees.
- 8. The *in-degree activity effect* (with or without ‘sqrt’) reflects tendencies for actors with high in-degrees to send out extra outgoing ties ‘because’ of their high current in-degrees. This leads to a higher correlation between in-degrees and out-degrees. The in-degree activity and out-degree popularity effects are not distinguishable in Method of Moments estimation; then the choice between them must be made on theoretical grounds.
- 9. The *out-degree activity effect* (with or without ‘sqrt’) reflects tendencies for actors with high out-degrees to send out extra outgoing ties ‘because’ of their high current out-degrees. This also leads to dispersion in out-degrees of the actors.
- 10. The *in-in degree assortativity effect* (where parameter 2 is the same as the sqrt version, while parameter 1 is the non-sqrt version) reflects tendencies for actors with high in-degrees to preferably be tied to other actors with high in-degrees.
- 11. The *in-out degree assortativity effect* (with parameters 2 or 1 in similar roles) reflects tendencies for actors with high in-degrees to preferably be tied to other actors with high out-degrees.
- 12. The *out-in degree assortativity effect* (with parameters 2 or 1 in similar roles) reflects tendencies for actors with high out-degrees to preferably be tied to other actors with high in-degrees.
- 13. The *out-out degree assortativity effect* (with parameters 2 or 1 in similar roles) reflects tendencies for actors with high out-degrees to preferably be tied to other actors with high out-degrees.

## 5.2 Important structural effects for network dynamics: two-mode networks

For the structural part of the model for network dynamics, for two-mode (or bipartite) networks, treated in [Koskinen and Edling \(2010\)](#), the most important effects are as follows. The mathematical formulae for these and other effects are given in Section 12. Here we give a more qualitative description.

1. The *out-degree effect* which always must be included.

2. Transitivity in two-mode networks is expressed in the first place by the number of *four-cycles* ([Robins and Alexander, 2004](#)). This reflects the extent to which actors who make one choice in common also make other choices in common.



- ⊙ The following three degree-related effects may be important especially for networks where degrees are theoretically important and represent social status or other features important for network dynamics; and/or for networks with high dispersion in in- or out-degrees (which may be an empirical reflection of the theoretical importance of the degrees). Include them if there are theoretical reasons for doing so, but only in such cases.
3. The *out-degree activity effect* (with or without ‘sqrt’; often the sqrt version, which transforms the degrees in the explanatory role by the square root, works better) reflects tendencies to dispersion in out-degrees of the actors.
4. The *in-degree popularity effect* (again, with or without ‘sqrt’, with the same considerations applying) reflects tendencies to dispersion in in-degrees of the column units.
5. The *out-in degree assortativity effect* (where parameter 2 is the same as the sqrt version, while parameter 1 is the non-sqrt version) reflects tendencies for actors with high out-degrees to preferably be tied to column units with high in-degrees.

## 5.3 Effects for network dynamics associated with covariates

For each individual covariate, there are several effects which can be included in a model specification, both in the network evolution part and in the behavioral evolution part (should there be dependent behavior variables in the data). Of course for two-mode networks, the covariates must be compatible with the network with respect to number of units (rows/columns).

- *network rate function*

1. the covariate's effect on the rate of network change of the actor;
- *network evaluation and endowment functions*
    1. the covariate-similarity effect, which is suitable for variables measured on an interval scale (or at least an ordinal scale where it is meaningful to use the absolute difference between the numerical values to express dissimilarity); a positive parameter implies that actors prefer ties to others with similar values on this variable – thus contributing to the network-autocorrelation of this variable not by changing the variable but by changing the network; for categorical variables, see the 'same covariate' effect below;
    2. the effect on the actor's activity (covariate-ego); a positive parameter will imply the tendency that actors with higher values on this covariate increase their out-degrees more rapidly;
    3. the effect on the actor's popularity to other actors (covariate-alter); a positive parameter will imply the tendency that the in-degrees of actors with higher values on this covariate increase more rapidly;
    4. the effect of the squared variable on the actor's popularity to other actors (squared covariate-alter) (included only if the range of the variable is at least 2). This normally makes sense only if the covariate-alter effect itself also is included in the model. A negative parameter implies a unimodal preference function with respect to alters' values on this covariate;
    5. the interaction between the value of the covariate of ego and of the other actor (covariate ego  $\times$  covariate alter); a positive effect here means, just like a positive similarity effect, that actors with a higher value on the covariate will prefer ties to others who likewise have a relatively high value; when used together with the alter effect of the squared variable this effect is quite analogous to the similarity effect, and for dichotomous covariates, in models where the ego and alter effects are also included, it even is equivalent to the similarity effect (although expressed differently), and then the squared alter effect is superfluous;
    6. the 'same covariate', or covariate identity, effect, which expresses the tendency of the actors to be tied to others with exactly the same value on the covariate; whereas the preceding four effects are appropriate for interval scaled covariates (and mostly also for ordinal variables), the identity effect is suitable for categorical variables;
    7. the interaction effect of covariate-similarity with reciprocity;
    8. the effect of the covariate of those to whom the actor is indirectly connected, i.e., through one intermediary but not with a direct tie; this value-at-a-distance can represent effects of indirectly accessed social capital.

The usual order of importance of these covariate effects on network evolution is: evaluation effects are most important, followed by endowment and rate effects. Inside the group of evaluation effects, for variables measured on an interval scale (or ordinal scale with

reasonable numerical values), it is the covariate-similarity effect that is most important, followed by the effects of covariate-ego and covariate-alter.

When the network dynamics is not smooth over the observation waves — meaning that the pattern of ties created and terminated, as reported in the initial part of the output file under the heading *Initial data description – Change in networks – Tie changes between subsequent observations*, is very irregular across the observation periods — it can be important to include effects of time variables on the network. Time variables are changing actor covariates that depend only on the observation number and not on the actors. E.g., they could be dummy variables, being 1 for one or some observations, and 0 for the other observations.

For actor covariates that have the same value for all actors within observation waves, or — in the case that there are structurally determined values — that are constant for all actors within the same connected components, only the ego effects are defined, because only those effects are meaningful. This exclusion of the alter, similarity and other effects for such actor variables applies only to variables without any missing values.

For each dyadic covariate, the following network evaluation effects can be included in the model for network evolution:

- *network evaluation and endowment functions*
  1. main effect of the dyadic covariate;
  2. the interaction effect of the dyadic covariate with reciprocity.


The main evaluation effect is usually the most important. In the current version of SIENA, there are no effects of dyadic covariates on behavioral evolution.

## 5.4 Cross-network effects for dynamics of multiple networks


If there are multiple dependent network variables, the following effects may be important. This is explained here jointly for the case of one-mode and two-mode networks. The *number of columns* is defined as the number of actors for one-mode networks, and as the number of units/nodes/... in the second node set for two-mode networks. For cross-network effects the network in the role of dependent variable is denoted by  $X$  and the network in the role of explanatory variable by  $W$ ; thus, effects go from  $W$  to  $X$ . All these effects are regarded as effects determining the dynamics of network  $X$ .

1. If both networks have the same number of columns, then the basic effect is of  $W$  on  $X$ , representing the extent to which the existence of a tie  $i \xrightarrow{W} j$  promotes the creation or maintenance of a tie  $i \xrightarrow{X} j$ .
2. If both networks are one-mode, then a next effect is the reciprocity effect with  $W$  on  $X$ , representing the extent to which the existence of a tie  $j \xrightarrow{W} i$  promotes the creation or maintenance of a tie, in the reverse direction,  $i \xrightarrow{X} j$ .


3. If both networks are one-mode, then a next effect is the mutuality effect with  $W$  on  $X$ , representing the extent to which the existence of a mutual tie  $i \xleftrightarrow{W} j$  promotes the creation or maintenance of a tie  $i \xrightarrow{X} j$ .
4. The *outdegree  $W$  activity effect* (where parameter 2 is the sqrt version, while parameter 1 is the non-sqrt version – see above for explanations of this) reflects the extent to which actors with high outdegrees on  $W$  will make more choices in the  $X$  network.
- ⊙ Several mixed transitivity effects can be important.
5. If  $X$  is a one-mode network, the *from  $W$  agreement* effect represents the extent to which agreement between  $i$  and  $j$  with respect to outgoing  $W$ -ties promotes the creation or maintenance of a tie  $i \xrightarrow{X} j$ .



6. If  $W$  is a one-mode network, the  *$W$  to agreement* effect represents the extent to which a  $W$  tie  $i \xrightarrow{W} j$  leads to agreement between  $i$  and  $j$  with respect to outgoing  $X$ -ties to others, i.e.,  $X$ -ties to the same third actors  $h$ ,  $i \xrightarrow{X} h$  and  $j \xrightarrow{X} h$ .



7. If  $X$  and  $W$  both are one-mode networks, the *closure of  $W$*  effect represents the tendency closure of  $W$  –  $W$  two-paths  $i \xrightarrow{W} h \xrightarrow{W} j$  by an  $X$  tie  $i \xrightarrow{X} j$ .



## 5.5 Effects on behavior evolution

For models with one or more dependent behavior variables, i.e., models for the co-evolution of networks and behavior, the most important effects for the behavior dynamics are the following; see [Steglich, Snijders, and Pearson \(2010\)](#). In these descriptions, with the ‘alters’ of an actor we refer to the other actors to whom the focal actor has an outgoing tie. The dependent behavior variable is referred to as  $Z$ .

1. The shape effect, expressing the basic drive toward high values on  $Z$ . A zero value for the shape will imply a drift toward the midpoint of the range of the behavior variable.
2. The effect of the behavior  $Z$  on itself, or quadratic shape effect, which is relevant only if the number of behavioral categories is 3 or more. This can be interpreted as giving a quadratic preference function for the behavior. When the coefficient for the shape effect is  $\beta_1^Z$  and for the effect of  $Z$  on itself, or quadratic shape effect, is  $\beta_2^Z$ , then the contributions of these two effects are jointly  $\beta_1^Z (z_i - \bar{z}) + \beta_2^Z (z_i - \bar{z})^2$ . With a negative coefficient  $\beta_2^Z$ , this is a unimodal preference function, with the maximum attained for  $z_i = \bar{z} - 2\beta_1^Z / \beta_2^Z$ . (Of course additional effects will lead to a different picture; but as long as the additional effects are linear in  $z_i$  — which is not the case for similarity effects! —, this will change the location of the maximum but not the unimodal shape of the function.) This can also be regarded as negative feedback, or a self-correcting mechanism: when  $z_i$  increases, the further push toward higher values of  $z_i$  will become smaller and when  $z_i$  decreases, the further push toward lower values of  $z_i$  will become smaller. On the other hand, when the coefficient  $\beta_2^Z$  is positive, the feedback will be positive, so that changes in  $z_i$  are self-reinforcing. This can be an indication of addictive behavior.
3. The average similarity effect, expressing the preference of actors to being similar with respect to  $Z$  to their alters, where the total influence of the alters is the same regardless of the number of alters.
4. The total similarity effect, expressing the preference of actors to being similar to their alters, where the total influence of the alters is proportional to the number of alters.
5. The average alter effect, expressing that actors whose alters have a higher average value of the behavior  $Z$ , also have themselves a stronger tendency toward high values on the behavior.
6. The indegree effect, expressing that actors with a higher indegree (more ‘popular’ actors) have a stronger tendency toward high values on the behavior.
7. The outdegree effect, expressing that actors with a higher outdegree (more ‘active’ actors) have a stronger tendency toward high values on the behavior.

Effects 1 and 2 will practically always have to be included as control variables. (For dependent behavior variables with 2 categories, this applies only to effect 1.) When the behavior dynamics is not smooth over the observation waves — meaning that the pattern of steps up and down, as reported in the initial part of the output file under the heading *Initial data description – Dependent actor variables – Changes*, is very irregular across the observation periods — it can be important to include effects of time variables on the behavior. Time variables are changing actor covariates that depend only on the observation number and not on the actors. E.g., they could be dummy variables, being 1 for one or some observations, and 0 for the other observations.



The average similarity, total similarity, and average alter effects are different specifications of social influence. The choice between them will be made on theoretical grounds and/or on the basis of statistical significance.

For each actor-dependent covariate as well as for each of the other dependent behavior variables, the effects on  $Z$  which can be included is the following.

1. The main effect: a positive value implies that actors with a higher value on the covariate will have a stronger tendency toward high  $Z$  values.
2. Interactions between two or three actor variables, see Section 5.6.

## 5.6 Additional interaction effects

It is possible for the user to define additional interaction effects for the network. The basis is provided by the initial definition, by SIENA, of ‘unspecified interaction effects’. Modifying two or three of the columns named ‘effect1’, ‘effect2’, and ‘effect3’ of the effects dataframe allows the definition of two-way or three-way interactions. The *effectNumber* of the effects between which an interaction is required should be entered in the ‘effect1’ and ‘effect2’, and for three-way effects, the ‘effect3’ columns. The interaction effect must also be ‘included’, but the underlying effects need only be ‘included’ if they are also required individually.

`includeInteraction` is an R function provided to facilitate the definition of interaction effects. Such effects can be specified simply by short names and the names of any variables required to identify the underlying effects: it is not necessary to know the effectNumbers of the effects. (The effectNumbers would change if new effects are introduced to RSiena.) Information about short names of effects can be found in the file ‘effects.pdf’ in the doc directory of the library, accessible from within R using the command

```
RShowDoc("effects", package="RSiena")
```

Alternatively a new version of this list can be displayed in a browser by using the function:

```
effectsDocumentation()
```

### 5.6.1 Interaction effects for network dynamics

The following kinds of user-defined interactions are possible for the network dynamics.

- a. Ego effects of actor variables can interact with all effects.
- b. Dyadic effects can interact with each other.

(The column “InteractionType” in the effects data frame indicates which effects are ‘ego’ effects and which are ‘dyadic’ effects.)

Thus a two-way interaction must be between two dyadic effects or between one ego effect and another effect. A three-way interaction may be between three dyadic effects, two dyadic effects and an ego effect, or two ego effects and another effect.

All effects used in interactions must be defined on the same network (in the role of dependent variable): that for which the “unspecified interaction effects” is defined. And either all must be evaluation effects or all must be endowment effects.

## 5.7 Time heterogeneity in model parameters

Currently for the case of a one mode network, you can include time heterogeneous parameters in your model. Consider the reformulation of the evaluation function into

$$f_{ij}^{(m)}(\mathbf{x}) = \sum_k (\beta_k + \delta_k^{(m)} h_k^{(m)}) s_{ik}(\mathbf{x}(i \rightsquigarrow j)) \quad (1)$$

where  $m$  denotes the period (from wave  $m$  to wave  $m + 1$  in the panel data set) and  $\delta_k^{(m)}$  are parameters for the effects interacted with time dummies. You can include these in your model simply via the function

```
myeffects <- includeTimeDummy(myeffects, density, reciprocity, timeDummy="2,3,6")
```

which would add three time dummy terms to each effect listed in the function.

We recommend that you start with simple models, and use the score type test for assessing heterogeneity, i.e., if `ans` is the object of results produced by `siena07`,

```
tt <- sienaTimeTest(ans)
```

to decide which dummy terms to include.

See [Lospinoso et al. \(2011\)](#) for a technical presentation of how the test works, and [Lospinoso \(2010\)](#) for a walkthrough on model selection.

## 5.8 Limiting the maximum outdegree

It is possible to request that all networks simulated have a maximum outdegree less than or equal to some given value. This is meaningful only if the observed networks also do not have a larger outdegree than this number, for any actor at any wave.

This is carried out by specifying the maximum allowed value in the `MaxDegree` parameter of the `sienaModelCreate` function, which determines the settings of the algorithm.

`MaxDegree` is a named vector, which means that its elements have names. The length of this vector is equal to the number of dependent networks. Each element of this vector must have a name which is the name of the corresponding network. E.g., for one dependent network called `mynet`, one could use

```
MaxDegree = c(mynet=10)
```

to restrict the maximum degree to 10. For two dependent networks called `friends` and `advisors`, one could use

```
MaxDegree = c(friends=6, advisors=4)
```

For a single network, the default value 0 is used to specify that the maximum is unbounded. For multiple networks, if for one network there is a bound for the maximum outdegree but for another network this should not be bounded, then the value 0 will not work, but one should use a bound which is at least  $n - 1$ , where  $n$  is the number of actors in the network (or the largest number, if there are multiple groups).

## 6 Estimation

The model parameters are estimated under the specification given during the model specification part, using an iterative stochastic approximation algorithm. Three estimation procedures are implemented: the Method of Moments (MoM) (Snijders, 2001; Snijders, Steglich, and Schweinberger, 2007); the Method of Maximum Likelihood (ML) (Snijders et al., 2010); and a Bayesian method (Koskinen, 2004; Koskinen and Snijders, 2007; Schweinberger and Snijders, 2007a). For non-constant rate functions, currently only MoM estimation is available. The Method of Moments is the default; the other two methods require much more computing time. Given the greater efficiency but longer required computing time for the ML and Bayesian methods, these can be useful especially for smaller data sets and relatively complicated models (networks and behavior; endowment effects).

In the following, the number of parameters is denoted by  $p$ . The algorithm is based on repeated (and repeated, and repeated...) simulation of the evolution process of the network. These repetitions are called ‘runs’ in the following. The MoM estimation algorithm is based on comparing the observed network (obtained from the data files) to the hypothetical networks generated in the simulations.

Note that the estimation algorithm is of a stochastic nature, so the results can vary! This is of course not what you would like. For well-fitting combinations of data set and model, the estimation results obtained in different trials will be very similar. It is good to repeat the estimation process at least once for the models that are to be reported in papers or presentations, to confirm that what you report is a stable result of the algorithm.

### 6.1 The estimation function `siena07`

The estimation process implemented in function `siena07` starts with initial values for the parameters, and returns a so-called `sienaFit` object, in this example called `results1`, which contains the estimates and their standard errors and a lot of further information. Since the estimate is iterative (depending on the initial value) and stochastic, the results are not always completely satisfactory. We shall see below how the satisfactory convergence of the algorithm can be checked, and how to go on if this is not satisfactory.

The estimation algorithm is determined by a call of functions such as

```
modell1 <- sienaModelCreate(projname = "trypro", useStdInits = FALSE)
results1 <- siena07(modell1, data = mydata, effects = myeff)
```

The function `sienaModelCreate` defines a model object with options for the algorithm, and the function `siena07` carries out the estimation. If you do not want to see the graphical interface with intermediate results, or if your computer has problems showing this, then add the option `batch = TRUE`, as in

```
results1 <- siena07(modell1, data = mydata, effects = myeff,
                    batch = TRUE)
```

If you wish to have detailed information at the console about the intermediate steps taken by the algorithm, then add the option `verbose = TRUE`, as in

```
results1 <- siena07(model1, data = mydata, effects = myeff,
                    verbose = TRUE)
```

The estimation produces an output file in the current working directory, of which the name is defined by the `projname` option; in this example, the name is `trypro.out`. To look at the information, you may either look at this file (which can be opened by any text editor), or produce results on the R console.

A brief summary of the results is given in the R console by typing the name of the `sienaFit` object. For example,

```
results1
```

could give a summary such as

```
Estimates, standard errors and t-statistics for convergence
              Estimate  Standard  t statistic
                  Error
Rate parameters:
0      Rate parameter    5.9379 ( 1.0007 )
1. eval outdegree (density) -2.4742 ( 0.1316 ) 0.1328
2. eval reciprocity        2.0198 ( 0.2505 ) -0.0260
3. eval transitive triplets 0.5137 ( 0.1726 ) -0.0053
4. eval 3-cycles           0.1278 ( 0.3462 ) 0.0189
5. eval smoke1 similarity   0.4477 ( 0.2576 ) 0.0244
Total of 1399 iteration steps.
```

Requesting a longer summary by a command such as

```
summary(results1)
```

will produce more information, including, e.g., the covariance matrix of the estimators.

### 6.1.1 Initial Values and Convergence Check

The *initial values* can be given in three ways.

1. If `useStdInits = TRUE` is used in the call of `sienaModelCreate`, standard initial values are used.  
These consist of some reasonable values for the rate parameters and the outdegree parameter, as well as for the linear shape parameter for behavioral dependent variables (if any); and 0 parameters for the rest.
2. If `useStdInits = FALSE` and no `prevAns` parameter is given in the call of `siena07`, the initial values are taken from the `sienaEffects` object, in this example called `myeff`.  
Below, we give a way to change the values contained in the `sienaEffects` object.
3. If `useStdInits = FALSE` and the `prevAns` ('previous answer') parameter is used, such as in

```
results1 <- siena07(model1, data = mydate, effects = myeff,
                    prevAns = results0)
```

the initial parameter estimates are taken from the results of what is given as the `prevAns` parameter. This must be a `sienaFit` object; in this example it is given as `results0`.

When parameters have been estimated, first the convergence of the algorithm must be checked. This is done by looking at the *t-ratios for convergence*. This is the last column, denoted `t statistic` in the summary given above. This check considers the deviations between simulated values (in Phase 3, see below) of the statistics and their observed values (the latter are called the ‘targets’). Ideally, these deviations should be 0. Because of the stochastic nature of the algorithm, when the process has properly converged the deviations are small but not exactly equal to 0. The program calculates the averages and standard deviations of the deviations and combines these in a *t-ratio* (in this case, average divided by standard deviation). Convergence is excellent when these *t-ratios* are less than 0.1 in absolute value, reasonable when they are less than 0.2, and moderate when they are less than 0.3. For published results, it is suggested that estimates presented come from runs in which all *t-ratios* for convergence are less than 0.1 in absolute value – or nearly so. (These bounds are indications only, and are not meant as severe limitations.)

In the example above, the largest absolute value of the *t-ratios* for convergence is equal to 0.1328, which is reasonable but not as small as desired. The best way to continue then is by making another estimation run, now carrying on from the last obtained result. This is done by using this result in the `prevAns` (‘previous answer’) parameter, while taking care that `useStdInits = FALSE` has been specified. An example is

```
results1 <- siena07(model1, data = mydata, effects = myeff,
                    prevAns = results1)
```

In this case, this second estimation run produced good results, with a maximum absolute *t-ratio* for convergence equal to 0.0777. The output file gives more extensive results, viz., the averages and standard deviations of the deviations from targets and the resulting *t-ratios*:

```
End of stochastic approximation algorithm, phase 3.
-----
```

```
Total of 1981 iterations.
Parameter estimates based on 981 iterations,
basic rate parameter as well as
convergence diagnostics, covariance and derivative matrices based on 1000 iterations.
```

```
Information for convergence diagnosis.
Averages, standard deviations, and t-ratios for deviations from targets:
1.   0.9140  16.0020  0.0571
2.   1.0200  14.3691  0.0710
3.   2.5880  44.3047  0.0584
```

```

4.    1.1270  14.5022  0.0777
5.    0.1994   4.9865  0.0400

```

Good convergence is indicated by the  $t$ -ratios being close to zero.

For example, for the fourth parameter (3-cycles), the average deviation from the target value was 1.1270, and the standard deviation across the 1000 simulations in Phase 3 was 14.5022. This yields a  $t$ -ratio of  $1.1270/14.5022 = 0.0777$ . Large values of the averages and standard deviations are in themselves not at all a reason for concern; only the  $t$ -ratio is important.

#### *Changing the starting values in the effects object*

In a `sienaEffects` object, which here we shall denote by the name `myeff`, the initial values are contained in the column `myeff$initialValue`. To change them, in most cases it is most convenient to access only the values for effects included in the model. The estimates obtained from a previous fit can be included as initial values by a command such as

```

myeff$initialValue[results1$requestedEffects$effectNumber] <-
  results1$theta

```

where `results1` is the `sienaFit` object produced by an earlier estimation run. The column with name `theta` contains the parameter estimates. Of course, instead of `results1$theta` one could use any other desired vector of the correct length.

Warning: this code will not work if you have requested time dummies.

Another way is to select the parameters for which initial values are changed not by the result of a fit, but by the effects object itself. To do this, one may assign the desired value to the vector

```

myeff$initialValue[myeff$include]

```

The rows of `myeff` for which `myeff$include` is true are the same rows that are listed by requesting

```

myeff

```

## 6.2 Some important components of the `sienaFit` object

If a user would like to do further calculations, it can be useful to know about the following components of `sienaFit` objects. Suppose the object is called `ans`. Some of the components are the following.

<code>ans\$theta</code>	estimates
<code>ans\$covtheta</code>	covariance matrix of the estimates
<code>ans\$pp</code>	number of parameters
<code>ans\$targets</code>	targets (observed statistics)
<code>ans\$tconv</code>	$t$ -ratios for convergence

<code>ans\$sf</code>	generated statistics in Phase 3
<code>ans\$msf</code>	covariance matrix of <code>ans\$sf</code>
<code>ans\$dfra</code>	estimated derivative of expected statistics w.r.t. parameters
<code>ans\$effects</code>	effects object

Like for any R object, the internal structure of the effects object can be requested by requesting

```
source("ans.txt")
str(ans)
source()
```

This writes the structure to the external file `ans.txt`, which may be better than printing it to the console, because it is a long story.

To get some further understanding, one could investigate some of the components of this object as follows. Note that the (`... <- ...`) statements are just a way for constructing the object and showing it at the same time.

```
# Compute the covariance matrix of the generated statistics
print(covsf <- cov(ans$sf))
# This is the same as ans$msf
# The means and standard deviations of the generated statistics minus targets:
(v <- colMeans(ans$sf))
(s <- apply(ans$sf, 2, sd))
# This also allows to compute the convergence t-ratios
v / s
# To get the generated statistics without subtracting the targets,
# we have to add the targets.
# To do this, repeated transposition t can be used:
stats <- t(t(ans$sf) + ans$targets)
# or
stats <- ans$sf + rep(ans$targets, each=nrow(ans$sf))
```

### 6.3 Algorithm

The estimation algorithm is an implementation of the Robbins-Monro (1951) algorithm, described in Snijders (2001, 2005), and has three phases:

1. In phase 1, the parameter vector is held constant at its initial value. This phase is for having a first rough estimate of the matrix of derivatives.
2. Phase 2 consists of several subphases. More subphases means a greater precision. The default number of subphases is 4. The parameter values change from run to run, reflecting the deviations between generated and observed values of the statistics. The changes in the parameter values are smaller in the later subphases.



The program searches for parameter values where these deviations average out to 0. This is reflected by what is called the ‘quasi-autocorrelations’ in the output screen. These are averages of products of successively generated deviations between generated and observed statistics. It is a good sign for the convergence of the process when the **quasi-autocorrelations** are negative (or positive but close to 0), because this means the generated values are jumping around the observed values.

3. In phase 3, the parameter vector is held constant again, now at its final value. This phase is for estimating the covariance matrix and the matrix of derivatives used for the computation of standard errors.

The default number of runs in phase 3 is 1000. This requires a lot of computing time, but when the number of phase 3 runs is too low, the standard errors computed are rather unreliable.

The number of subphases in phase 2, and the number of runs in phase 3, are determined by parameters **nsub** and **n3** in the call of **sienaModelCreate**.

During the estimation process, if the graphical user interface is used (the default **batch** = **FALSE** in the call of **siena07**), the user can break in and modify the estimation process in two ways:

1. it is possible to terminate the estimation;
2. in phase 2, it is possible to terminate phase 2 and continue with phase 3.

## 6.4 Output

When the **sienaFit** object produced by **siena07** is called **ans**, it was mentioned above that requesting just **ans** or **summary(ans)** produce output on the R console. A table in latex or html format can be produced from this output by the **xtable.sienaFit** method. For example.

```
xtable(ans, file="ans1.htm", type="html")
```

produces in the working directory a html file with the **ans** results in tabular form. The **xtable** library has many further options.

The function **siena07** writes an output file which is an ASCII (‘text’) file that can be read by any text editor. It is called **pname.out**, where **pname** is the name specified in the call of **sienaModelCreate**).

The output file is divided into sections indicated by a line **@1**, subsections indicated by a line **@2**, subsubsections indicated by **@3**, etc. For getting the main structure of the output, it is convenient to have a look at the **@1** marks first.

The primary information in the output of the estimation process consists of the following three parts.

1. *Convergence check*

This was discussed **above**.

2. *Parameter values and standard errors*

The next crucial part of the output is the list of estimates and standard errors. Suppose that the following result was obtained.

Rate parameters:

0	Rate parameter	6.0742	( 1.0134 )	
1.	eval outdegree (density)	-2.5341	( 0.1445 )	0.0571
2.	eval reciprocity	2.1106	( 0.2625 )	0.0710
3.	eval transitive triplets	0.5449	( 0.1781 )	0.0584
4.	eval 3-cycles	0.0779	( 0.3425 )	0.0777
5.	eval smoke1 similarity	0.4519	( 0.2497 )	0.0400

The rate parameter is the *parameter* called  $\rho$  in section 12.1.4 below. The value 6.0742 indicates that the estimated number of opportunities for change per actor (note that each actor corresponds to a row in the adjacency matrix) between the two observations is 6.07 (rounded in view of the standard error 1.01). Note that this refers to unobserved changes, and that some opportunities for change lead to the decision ‘no change’, and moreover some of these changes may cancel (make a new choice and then withdraw it again), so the average observed number of differences per actor will be smaller than this estimated number of unobserved changes.

The other five parameters are the weights in the *evaluation function*. The terms in the evaluation function in this model specification are the *out-degree effect* defined as  $s_{i1}$  in Section 12.1.1, the *reciprocity effect*  $s_{i2}$ , *transitive triplets effect*  $s_{i3}$ , *three-cycles effect*  $s_{i5}$ , *sex similarity effect*  $s_{i40}$ . Therefore the estimated evaluation function here is

$$-2.53 s_{i1}(x) + 2.11 s_{i2}(x) + 0.54 s_{i3}(x) + 0.08 s_{i5}(x) + 0.45 s_{i40}(x)$$

where again some rounding was applied in view of the standard errors. The parameter estimates can be combined with the standard errors to test the parameters. (Testing of parameters is discussed more extensively in Chapter 8.)

For the rate parameter, testing the hypothesis that it is 0 is meaningless because the fact that there are differences between the two observed networks implies that the rate of change must be positive. The weights in the evaluation function can be tested by  $t$ -statistics, defined as estimate divided by its standard error. (Do not confuse this  $t$ -test with the *t-ratio* for checking convergence; these are completely different although both are  $t$  ratios!) Here the  $t$ -values are, respectively,  $-2.5341/0.1445 = -17.54$ ,  $2.1106/0.2625 = 8.04$ ,  $0.5449/0.1781 = 3.06$ ,  $0.0779/0.3425 = 0.23$ ,  $0.4519/0.2497 = 1.81$ . Since the first three are larger than 2 in absolute value, they are significant at the 0.05 significance level. It follows that there is evidence that the actors have a ‘preference’ for reciprocal and transitive relations. For three-cycles, the effect is not significant ( $t = 0.23$ ), for smoking similarity it is significant at the 0.10 significance level. The value of the density parameter is not very important; it is important that this parameter is included to control for the density in the network, but as all other statistics are correlated with the density, the density is difficult to interpret by itself.

### 3. Collinearity check

In the output file, the covariance matrix of the estimates is presented. This can also be requested by `summary(ans)`. For conditional estimation, the rate parameters are not included in this matrix. In this case the covariance matrix is as follows.

Covariance matrix of estimates (correlations below diagonal):)				
0.021	-0.018	-0.010	0.006	-0.008
-0.468	0.069	0.008	-0.034	-0.002
-0.395	0.180	0.032	-0.049	0.003
0.130	-0.378	-0.795	0.117	-0.001
-0.223	-0.037	0.074	-0.007	0.062

The diagonal values are the variances, i.e., the squares of the standard errors (e.g., for the reciprocity effect, 0.069 is the square of 0.2625). Below the diagonal are the correlations. E.g., the correlation between the estimated outdegree effect and the estimated reciprocity effect is  $-0.468$ . These correlations can be used to see whether there is an important degree of collinearity between the effects. Collinearity means that several different combinations of parameter values could represent the same data pattern, in this case, the same values of the network statistics. When one or more of the correlations are very close to  $-1.0$  or  $+1.0$ , this is a sign of near collinearity. This will also lead to large standard errors of those parameters. It may then be advisable to omit one of the corresponding effects from the model, because it may be redundant given the other (strongly correlated) effect; but see [below](#). It is possible that the standard error of the retained effect becomes much smaller by omitting the other effect, which can also mean a change of the  $t$ -test from non-significance to significance.

The suggestion of omitting effects that lead to high parameter correlations with other effect does not directly apply to effects that should be included for other reasons, such as the density effect for network dynamics and the linear and quadratic shape effects for behavior dynamics.

However, correlations between parameter estimates close to  $-1.0$  or  $+1.0$  should not be used too soon in themselves as reasons to exclude effects from a model. This is for two reasons. In the first place, network statistics often are highly correlated (for example, total number of ties and number of transitive triplets) and these correlations just are one of the properties of networks. Second, near collinearity is not a problem in itself, but the problem (if any) arises when standard errors are high, which may occur because the value of the parameters of highly correlated variables is very hard to estimate with any precision. The problem resides in the large standard errors, not in itself in the strong correlation between the parameter estimates. If for both parameters the ratio of parameter estimate to standard error, i.e., the  $t$ -ratio, is larger than 2 in absolute value, in spite of the high correlations between the parameter estimates, then the significance of the  $t$ -test is evidence anyway that both effects merit to be included in the model. In other words, in terms of the ‘signal-to-noise ratio’: the random noise is high but the signal is strong enough that it overcomes the noise.

As a rule of thumb for parameter correlations, usually for correlations of estimated structural network effects there is no reason for concern even when these correlations are as strong as .9.

In the example above, the strongest correlation was found between the parameter estimates for transitive triplets and three-cycles. This is not surprising, because both are triadic effects. In this case, the three-cycle effect was not significant, and can be dropped for that reason.

#### 6.4.1 Fixing parameters

Sometimes an effect must be present in the model, but its precise numerical value is not well-determined. E.g., if the network at time  $t_2$  would contain only reciprocated choices, then the model should contain a large positive reciprocity effect but whether it has the value 3 or 5 or 10 does not make a difference. This will be reflected in the estimation process by a large estimated value and a large standard error, a derivative which is close to 0, and sometimes also by **lack of convergence of the algorithm**. (This type of problem also occurs in maximum likelihood estimation for logistic regression and certain other generalized linear models; see [Geyer and Thompson \(1992, section 1.6\)](#), [Albert and Anderson \(1984\)](#); [Hauck Jr and Donner \(1977\)](#).) In such cases this effect should be fixed to some large value and not left free to be estimated. This can be specified by using the `setEffect` function with the `fix = TRUE` option.

#### 6.4.2 Automatic fixing of parameters

If the algorithm encounters computational problems, sometimes it tries to solve them automatically by fixing one (or more) of the parameters. This will be noticeable because a parameter is reported in the output as being fixed without your having requested this. This automatic fixing procedure is used, when in phase 1 one of the generated statistics seems to be insensitive to changes in the corresponding parameter.

This is a sign that there is little information in the data about the precise value of this parameter, when considering the neighborhood of the initial parameter values. However, it is possible that the problem is not in the parameter that is being fixed, but is caused by an incorrect starting value of this parameter or one of the other parameters.

When the warning is given that the program automatically fixed one of the parameter, try to find out what is wrong.

In the first place, check that your data were entered correctly and the coding was given correctly, and then re-specify the model or restart the estimation with other (e.g., 0) parameter values. Sometimes starting from different parameter values (e.g., the default values implied by the **model option** of “standard initial values”) will lead to a good result. Sometimes, however, it works better to delete this effect altogether from the model.

It is also possible that the parameter does need to be included in the model but its precise value is not well-determined. Then it is best to give the parameter a large (or strongly negative) value and indeed **require it to be fixed** (see [Section 10.1](#)).

#### 6.4.3 Conditional and unconditional estimation

SIENA has two methods for MoM estimation and simulation: conditional and unconditional. They differ in the *stopping rule* for the simulations of the network evolution. In unconditional estimation, the simulations of the network evolution in each time period (and the co-evolution of the behavioral dimensions, if any are included) carry on until the predetermined time length (chosen as 1.0 for each time period between consecutive observation moments) has elapsed.

In conditional estimation, in each period the simulations run on until a stopping criterion is reached that is calculated from the observed data. Conditioning is possible for each of the dependent variables (network, or behavior), where ‘conditional’ means ‘conditional on the observed number of changes on this dependent variable’.

Conditioning on the network variable means running simulations until the number of different entries between the initially observed network of this period and the simulated network is equal to the number of entries in the adjacency matrix that differ between the initially and the finally observed networks of this period.

Conditioning on a behavioral variable means running simulations until the sum of absolute score differences on the behavioral variable between the initially observed behavior of this period and the simulated behavior is equal to the sum of absolute score differences between the initially and the finally observed behavior of this period.

Conditional estimation is slightly more stable and efficient, because the corresponding rate parameters are not estimated by the Robbins Monro algorithm, so this method decreases the number of parameters estimated by this algorithm.

The choice between unconditional and the different types of conditional estimation is made in the `sienaModelCreate` function by setting the `cond` parameter. For data specifications with multiple dependent variables, at most one dependent variable can be used for conditioning. This choice is made dependent on the `condvarno` and `condname` parameters in this function.

If there are changes in network composition (see Section 4.7), only the unconditional estimation procedure is available.

#### 6.4.4 Required changes from conditional to unconditional estimation

Even though conditional estimation is slightly more efficient than unconditional estimation, there is one kind of problem that sometimes occurs with conditional estimation and which is not encountered by unconditional estimation.

It is possible (but luckily rare) that the initial parameter values were chosen in an unfortunate way such that the conditional simulation does not succeed in ever attaining the condition required by its stopping rule (see Section 6.4.3). The solution is either to use standard initial values or to to unconditional estimation.

## 7 Standard errors

The estimation of standard errors of the MoM estimates requires the estimation of derivatives, which indicate how sensitive the expected values of the statistics (see Section 6.3) are with respect to the parameters. The derivatives can be estimated by two methods:

- finite differences method with common random numbers,
- score function method.

The finite difference method is explained (briefly) in [Snijders \(2001\)](#), the score function method was developed in [Schweinberger and Snijders \(2007b\)](#) (where also the finite difference method is explained). The score function method demands less computation time than finite differences, but requires more iterations in phase 3 of the estimation algorithm, explained in Section 6.3. It is recommended to use at least 1000 iterations (default) in phase 3. For published results, it is recommended to have 2000 or 4000 iterations in phase 3.

In `RSiena`, the method for estimating derivatives is set by the `findiff` parameter and the number of iterations in phase 3 by the `n3` parameter, both in function `sienaModelCreate()` that creates the object with specifications for the algorithm

## 8 Tests

Two types of tests are available in SIENA.

1.  $t$ -type tests of single parameters can be carried out by dividing the parameter estimate by its standard error. Under the null hypothesis that the parameter is 0, these tests have approximately a standard normal distribution. These may also be called Wald-type tests. Section 8.1 indicates how to construct multi-parameter tests from the same principle.
2. Score-type tests of single and multiple parameters are described in Section 8.2.

### 8.1 Wald-type tests

Wald-type tests are based on the parameter estimates and their covariance matrix. Recall that the variances of the parameter estimates are on the diagonal of this covariance matrix, and the standard errors are the square roots of these diagonal elements.

In Section 6.2 we saw that, for a `sienaFit` object `ans`, the estimates are given in `ans$theta` and the covariance matrix in `ans$covtheta`. For testing the null hypothesis that component  $k$  of the parameter vector is 0,

$$H_0 : \theta_k = 0,$$

the  $t$ -test is based on

$$\frac{\hat{\theta}_k}{\text{s.e.}(\hat{\theta}_k)} = \text{ans\$theta}[k] / \sqrt{\text{ans\$covtheta}[k,k]} \quad .$$

This can be easily calculated by hand from the `RSiena` results.

Now suppose that we wish to test another null hypothesis, which can be represented as a linear constraint on  $\theta$ :

$$H_0 : A\theta = 0,$$

where  $A$  is a  $r \times p$  matrix, the dimension of  $\theta$  being  $p$ . For example, if  $p = 5$ , for testing

$$H_0 : \theta_2 = \theta_3$$

we would use the matrix

$$A = (0, 1, -1, 0, 0) ;$$

while for testing

$$H_0 : \theta_2 = \theta_3 = 0$$

if  $p = 5$ , we would use the matrix

$$A = \begin{pmatrix} 0, 1, 0, 0, 0 \\ 0, 0, 1, 0, 0 \end{pmatrix} .$$

Then the following function can be used to produce the Wald-type test: the chi-squared value of the test statistic, the number of degrees of freedom, and the  $p$ -value.

```

Wald.RSiena <- function(A, ans)
{
  th <- A %*% ans$theta
  cov <- A %*% ans$covtheta %*% t(A)
  chisq <- t(th) %*% solve(cov) %*% th
  df <- nrow(as.matrix(A))
  pval <- 1 - pchisq(chisq,df)
  c(chisquare = chisq, df = df, pvalue = pval)
}

```

As an example, for the first two waves of the `klas12b` data the following results were obtained, collected in the `sienaFit` object `ans`.

		Estimate	Standard Error	t statistic
Rate parameters:				
0	Rate parameter	10.4625	( 1.8917 )	
1.	eval outdegree (density)	-1.8760	( 0.1883 )	0.0173
2.	eval reciprocity	1.1405	( 0.3397 )	-0.0430
3.	eval transitive triplets	0.3703	( 0.0639 )	-0.0425
4.	eval 3-cycles	-0.3373	( 0.1238 )	0.0020
5.	eval primary	0.6718	( 0.2125 )	-0.0619
6.	eval sex alter	0.1390	( 0.2011 )	-0.0545
7.	eval sex ego	0.3165	( 0.1938 )	-0.0055
8.	eval sex similarity	0.8197	( 0.2126 )	-0.0298

The output of `summary(ans)` also contains the covariance matrix of the estimates:

```

Covariance matrix of estimates (correlations below diagonal)
  0.035  -0.030  -0.009   0.011  -0.009   0.004  -0.003  -0.018
-0.470   0.115   0.009  -0.031  -0.003  -0.009   0.002  -0.006
-0.767   0.432   0.004  -0.006   0.003   0.001   0.000   0.005
  0.475  -0.731  -0.761   0.015  -0.005  -0.001   0.001  -0.005
-0.218  -0.044   0.246  -0.180   0.045   0.004  -0.003   0.011
  0.096  -0.132   0.067  -0.058   0.090   0.040  -0.017   0.002
-0.092   0.029  -0.017   0.037  -0.079  -0.437   0.038   0.009
-0.442  -0.076   0.369  -0.172   0.234   0.054   0.208   0.045

```

To test the null hypothesis that the three sex effects (ego, alter, similarity) are zero, the matrix `A` is constructed as follows, and the Wald test then is requested.

```

A <- matrix(0, 3, 8)
A[1, 6] <- 1
A[2, 7] <- 1
A[3, 8] <- 1
as.matrix(Wald.RSiena(A, ans))

```

(The use of the `as.matrix()` function merely serves to give a prettier printout of the result.) The result is

```

      [,1]
chisquare 16.55552
df         3
pvalue     0.0008721914

```



The  $p$ -value of  $p < 0.001$  expresses strong evidence that the network dynamics depends on sex.

## 8.2 Score-type tests

A generalized Neyman-Rao score test is implemented for the MoM estimation method in SIENA (see [Schweinberger, 2010](#)).

Most goodness-of-fit tests will have the following form: some model is specified and one or more parameters are restricted to some constant, in most cases 0 – these constant values define the null hypothesis being tested. This can be obtained in *RSiena* by appropriate choices in the effects dataframe (called *myeff* in Section 2.4). Parameters can be restricted by putting 1 in the *fix* and *test* columns when editing the effects, and the tested value in the *initialValue* column. For example, to request a score test for the reciprocity evaluation effect for the first network: Suppose this effect has *effectNumber* equal to 10, the commands can be as follows.

```
myeff[10, 9] <- TRUE
myeff[10, 'fix'] <- TRUE
myeff[10, 'test'] <- TRUE
myeff[10, 'initialValue'] <- ((value to be used for test))
## or, more easily,
myeff <- setEffect(myeff, recip, fix=TRUE, test=TRUE,
                  initialValue=(value to be used for test))
```

The goodness-of-fit test proceeds by simply estimating the restricted model (not the unrestricted model, with unrestricted parameters) by the standard SIENA estimation algorithm. No more information needs to be communicated.

## 8.3 Example: one-sided tests, two-sided tests, and one-step estimates

Suppose that it is desired to test the goodness-of-fit of the model restricted by the null hypothesis that the reciprocity parameter is zero. The following output may be obtained:

```
@2
Generalised score test <c>
-----

Testing the goodness-of-fit of the model restricted by

(1)  eval:  reciprocity                                =  0.0000
-----

      c =    3.9982   d.f. = 1   p-value =    0.0455
      one-sided (normal variate):    1.9996
-----

One-step estimates:
```

l: constant network rate (period 1)	6.3840
l: constant network rate (period 2)	6.4112
eval: outdegree (density)	0.9404
eval: reciprocity	1.2567

To understand what test statistic  $\langle c \rangle$  is about, consider the case where the network is observed at two time points, and let  $R$  be the number of reciprocated ties at the second time point. Then it can be shown that the test statistic is some function of

$$\text{Expected } R \text{ under the restricted model} - \text{observed } R.$$

Thus, the test statistic has some appealing interpretation in terms of goodness-of-fit: when reciprocated ties do have added value for the firms—which means that the reciprocity parameter is not 0, other than the model assumes—then the deviation of the observed  $R$  from the  $R$  that is expected under the model will be large (large misfit), and so will be the value of the test statistic. Large values of the test statistic imply low  $p$ -values, which, in turn, suggests to abandon the model in favor of models incorporating reciprocity.

The null distribution of the test statistic  $c$  tends, as the number of observations increases, to the chi-square distribution, with degrees of freedom equal to the number of restricted parameters. The corresponding  $p$ -value is given in the output file.

In the present case, one parameter is restricted (reciprocity), hence there is one degree of freedom  $d.f. = 1$ . The value of the test statistic  $c = 3.9982$  at one degree of freedom gives  $p = 0.0455$ . That is, it seems that reciprocity should be included into the model and estimated as the other parameters.

The one-sided test statistic, which can be regarded as normal variate, equals 1.9996 indicating that the value of the transitivity parameter is positive.

The one-step estimates are approximations of the unrestricted estimates (that is, the estimates that would be obtained if the model were estimated once again, but without restricting the reciprocity parameter). The one-step estimate of reciprocity, 1.2567, hints that this parameter is positive, which agrees with the one-sided test.

### 8.3.1 Multi-parameter tests

In the case where  $K > 1$  model parameters are restricted, SIENA evaluates the test statistic with  $K$  degrees of freedom. A low  $p$ -value of the joint test would indicate that the goodness-of-fit of the model is intolerable. However, the joint test with  $K$  degrees of freedom gives no clue as to what parameters should be included into the model: the poor goodness-of-fit could be due to only one of the  $K$  restricted parameters, it could be due to two of the  $K$  restricted parameters, or due to all of them. Hence SIENA carries out, in addition to the joint test with  $K$  degrees of freedom, additional tests with one degree of freedom that test the single parameters one-by-one. The goodness-of-fit table is as follows:

```

@2
Generalised score test <c>
-----

Testing the goodness-of-fit of the model restricted by

(1)  eval:  covariate_ij (centered)          =  0.0000
(2)  eval:  covariate_i alter                =  0.0000
(3)  eval:  covariate_i similarity           =  0.0000
-----

Joint test:
-----
      c =  92.5111   d.f. = 3   p-value [ 0.0001

(1) tested separately:
-----
- two-sided:
      c =  62.5964   d.f. = 1   p-value [ 0.0001
- one-sided (normal variate):   7.9118

(2) tested separately:
-----
- two-sided:
      c =  16.3001   d.f. = 1   p-value [ 0.0001
- one-sided (normal variate):   4.0373

(3) tested separately:
-----
- two-sided:
      c =  23.4879   d.f. = 1   p-value [ 0.0001
- one-sided (normal variate):   4.8464
-----

One-step estimates:

l: constant network rate (period 1)          7.4022
l: constant network rate (period 2)          6.4681
eval: outdegree (density)                   -0.4439
eval: reciprocity                           1.1826
eval: transitive triplets                    0.1183
eval: covariate_ij (centered)                 0.4529
eval: covariate_i alter                      0.1632
eval: covariate_i similarity                  0.4147

```

In the example output, three parameters are restricted. The joint test has test statistic  $c$ , which has under the null hypothesis a chi-squared distribution with  $d.f. = 3$ . The  $p$ -value corresponding to the joint test indicates that the restricted model is not tenable. Looking at the separate tests, it seems that the misfit is due to all three parameters. Thus, it is sensible to improve the goodness-of-fit of the baseline model by including all of these parameters, and estimate them.

## 8.4 Alternative application: convergence problems

An alternative use of the score test statistic is as follows. When convergence of the estimation algorithm is doubtful, it is sensible to restrict the model to be estimated. Either "problematic" or "non-problematic" parameters can be kept constant at preliminary estimates (estimated parameters values). Though such strategies may be doubtful in at least some cases, it may be, in other cases, the only viable option besides simply abandoning "problematic" models. The test statistic can be exploited as a guide in the process of restricting and estimating models, as small values of the test statistic indicate that the imposed restriction on the parameters is not problematic.

## 8.5 Testing differences between independent groups

Sometimes it is interesting to test differences between parameters estimated for independent groups. For example, for work-related support networks analyzed in two different firms, one might wish to test whether the tendency to reciprocation of work-related support, as reflected by the reciprocity parameter, is equally strong in both firms. Such a comparison is meaningful especially if the total model is the same in both groups, as control for different other effects would compromise the basis of comparison of the parameters.

If the parameter estimates in the two networks are  $\hat{\beta}_a$  and  $\hat{\beta}_b$ , with standard errors  $s.e_a$  and  $s.e_b$ , respectively, then the difference can be tested with the test statistic

$$\frac{\hat{\beta}_a - \hat{\beta}_b}{\sqrt{s.e_a^2 + s.e_b^2}}, \quad (2)$$

which under the null hypothesis of equal parameters has an approximating standard normal distribution.

## 8.6 Testing time heterogeneity in parameters

We initially assume that  $\beta$  does not vary over time, yielding a *restricted model*. Our data contains  $|\mathcal{M}|$  observations, and we estimate the restricted model the method of moments. We wish to test whether the *restricted model* is misspecified with respect to time heterogeneity. Formally, define a vector of time dummy terms  $\mathbf{h}$ :

$$h_k^{(m)} = \begin{cases} 1 & \{m : w_m \in \mathcal{W}, m \neq 1\} \\ 0 & \text{elsewhere} \end{cases}, \quad (3)$$

where  $k$  corresponds to an effect included in the model.<sup>9</sup> The explanation here is formulated for the network evaluation function, but the principle can be applied more generally. An *unrestricted model* which allows for time heterogeneity in all of the effects is considered as a modification of (7):

$$f_{ij}^{(m)}(\mathbf{x}) = \sum_k (\beta_k + \delta_k^{(m)} h_k^{(m)}) s_{ik}(\mathbf{x}(i \rightsquigarrow j)) \quad (4)$$

where  $\delta_k^{(m)}$  are parameters for interactions of the effects with time dummies. One way to formulate the testing problem of assessing time heterogeneity is the following:

$$\begin{aligned} H_0 : \delta_k^{(m)} &= 0 \text{ for all } k, m \\ H_1 : \delta_k^{(m)} &\neq 0 \text{ for some } k, m. \end{aligned} \quad (5)$$

An application of the score test is given for the special case of parameter heterogeneity by [Lospinoso et al. \(2011\)](#) and implemented in RSiena. To apply the test to your dataset, run an estimation in the usual way, e.g. as follows (we specify `nsub=2`, `n3=100` just to have an example that runs very quickly):

```
mymodel <- sienaModelCreate(fn=simstats0c, nsub=2, n3=100)
mynet1 <- sienaNet(array(c(s501, s502, s503), dim=c(50, 50, 3)))
mydata <- sienaDataCreate(mynet1)
myeff <- getEffects(mydata)
myeff <- includeEffects(myeffect, transTrip, balance)
ans2 <- siena07(mymodel, data=mydata, effects=myeff, batch=TRUE)
```

and conduct the timetest through

```
## Conduct the score type test to assess whether heterogeneity is present.
tt2 <- sienaTimeTest(ans2)
plot(tt2, effects=1:2)
```

If as a consequence of this analysis you wish to add time dummy terms, this may be done via

---

<sup>9</sup>The dummy  $\delta_k^{(1)}$  is always zero so that period  $w_1$  is (arbitrarily) considered the reference period.

```
myeff <- includeTimeDummy(myeff, recip, balance, timeDummy="2")  
ans3 <- siena07(mymodel, data=mydata, effects=myeff, batch=TRUE)
```

and testing again,

```
tt3 <- sienaTimeTest(ans3)
```

and so on.

See [Lospinoso \(2010\)](#) for a walkthrough of the model selection process for time dummy terms.

## 9 Simulation

The simulation option simulates the network evolution for fixed parameter values. This is meaningful, e.g., for theoretical exploration of the model, for goodness of fit assessment, and for studying the sensitivity of the model to parameters. Simulations are produced by the `siena07` function also used for parameter estimation, but by calling it in such a way that only Phase 3 is carried out (see section 6.3). This is done by requesting `nsub = 0` in the model specification in function `sienaModelCreate`.

```
sim_model <- sienaModelCreate( projname = 'sim_model', cond = FALSE,
                              useStdInits = FALSE, nsub = 0 )
sim_ans   <- siena07( sim_model, data = mydata, effects = myeff )
```

Mostly it is more meaningful to do this for non-conditional simulation (hence `cond = FALSE`), and a two-wave data set, so that the simulations are totally determined by the parameters and the first observation. The second wave then must be present in the data set only because `RSiena` requires it for estimation, and here we are using a function that is originally meant for estimation. Parameter values are obtained from the effects object, because of the option `useStdInits = FALSE`. If the name of the effects object is `myeff`, the current parameter values are obtained from requesting

```
myeff
```

and different values can be specified by assigning the desired value to the vector

```
myeff$initialValue[myeff$include]
```

The statistics generated, which are the statistics corresponding to the effects in the model, can be accessed from the `sienaFit` object produced by `siena07`. Denoting the name of this object by `sim_ans`, its component `sim_ans$sf` contains the generated deviations from targets. As discussed also in Section 6.2, the statistics can be recovered from the deviations and the targets as follows.

```
# To get the generated statistics without subtracting the targets,
# we have to add the targets to the deviations.
# To do this, repeated transposition t can be used:
stats      <- t(t(sim_ans$sf) + sim_ans$targets)
# Calculate means and covariance matrix:
v          <- apply(stats,2,mean)
covsf      <- cov(stats)
# covsf is the same as sim_ans$msf
```

Of course, any other distributional properties of the generated statistics can also be obtained by the appropriate calculations and graphical representations in R.

## 9.1 Accessing the generated networks

If one is interested in the networks generated, not only in the statistics internally calculated, then the entire networks can be accessed. This is done by using the `returnDeps` option, as follows.

```
sim_ans <- siena07( mymodel, data = mydata, effects = myeff,
                   returnDeps = TRUE )
```

The `returnDeps = TRUE` option attaches a list `sim_ans$sims` containing all simulated networks as edge lists to the `sim_ans` object. This uses rather a lot of memory. Since here the default `n3 = 1000` was used, `sim_ans` will be a list of 1000 elements; e.g., the 568'th network generated is given by

```
sim_ans$sims[[568]][[1]][[1]][[1]]
```

As an example, the following commands turn this list into a list of edgelist according to the format of the `sna` package (Butts, 2008), and then calculate the maximum *k*-core numbers in the networks.

```
# First define a function that extracts the desired component
# from the list element,
# gives the column names required for sna edgelist,
# and adds the attribute defining the number of nodes in the graph,
# as required by sna.
make.edgelist.sna <- function(x, n)
{
  x <- x[[1]][[1]][[1]]
  colnames(x) <- c("snd", "rec", "val")
  attr(x, "n") <- n
  x
}

# Apply this function to the list of simulated networks
simusnas <- lapply(sim_ans$sims, make.edgelist.sna, 50)
# Define a function that calculates the largest k-core number in the graph
library(sna)
max.kcores <- function(x)max(kcores(x))
# Apply this function and make a histogram
mkc <- sapply(simusnas, max.kcores)
hist(mkc)
```

## 9.2 Conditional and unconditional simulation

The distinction between conditional and unconditional simulation is the same for the simulation as for the *estimation option* of SIENA, described in Section 6.4.3. The choice between conditional and unconditional simulation is made in the `sienaModelCreate` function by setting the `cond` parameter, possibly also the `condvarno` and `condname` parameters.



If the conditional option is chosen, then the simulations carry on until the desired distance is achieved on the dependent variable used for conditioning. For networks, the distance is the number of differences in the tie variables; for behavioral variables, the sum across actors of the absolute differences. This is determined as the distance between the consecutive networks (or, behaviors, if such a variable is used for conditioning) given in the call of `sienaDataCreate`. The rate parameter for this dependent variable then has no effect.

If the conditional simulation option was chosen (which is the default) and the simulations do not succeed in achieving the condition required by *its stopping rule* (see Section 6.4.3), then the simulation is terminated with an error message, saying *This distance is not achieved for this parameter vector*. In this case, you are advised to change to unconditional simulation.

## 10 Getting started

For getting a first acquaintance with the model, one may use the data set collected by Gerhard van de Bunt, discussed extensively in [van de Bunt \(1999\)](#); [van de Bunt, van Duijn, and Snijders \(1999\)](#), and used as example also in [Snijders \(2001\)](#) and [Snijders \(2005\)](#). The data files are provided with the program and at the [SIENA website](#). The digraph data files used are the two networks `vrnd32t2.dat`, `vrnd32t4.dat`. The networks are coded as 0 = unknown, 1 = best friend, 2 = friend, 3 = friendly relation, 4 = neutral, 5 = troubled relation, 6 = item non-response, 9 = actor non-response. Choose the values 1, 2, and 3 as the values to be coded as 1 for the first as well as the second network. Choose 6 and 9 as missing data codes.

The actor attributes are in the file `vars.dat`. Variables are, respectively, gender (1 = *F*, 2 = *M*), program, and smoking (1 = yes, 2 = no). See the references mentioned above for further information about this network and the actor attributes.

At first, leave the specification of the rate function as it is by default (see [Section 5](#)): a constant rate function).

Then let the program estimate the parameters. You will see a screen with intermediate results: current parameter values, the differences (‘deviation values’) between simulated and observed statistics (these should average out to 0 if the current parameters are close to the correct estimated value), and the [quasi-autocorrelations](#) discussed in [Section 6](#).

It is possible to intervene in the algorithm by clicking on the appropriate buttons: the algorithm may be restarted or terminated. In most cases this is not necessary.

Some patience is needed to let the machine complete its three phases. After having obtained the outcomes of the estimation process, the model can be respecified: non-significant effects may be excluded (but it is advised always to retain the out-degree and the reciprocity effects) and other effects may be included.

### 10.1 Model choice

For the selection of an appropriate model for a given data set it is best to start with a simple model (including, e.g., 2 or 3 effects), delete non-significant effects, and add further effects in groups of 1 to 3 effects. Like in regression analysis, it is possible that an effect that is non-significant in a given model may become significant when other effects are added or deleted!

When you start working with a new data set, it is often helpful first to investigate the main endogenous network effects (reciprocity, transitivity, etc.) to get an impression of what the network dynamics looks like, and later add effects of covariates. The most important effects are discussed in [Section 5](#); the effects are defined mathematically in [Section 12](#).

#### 10.1.1 Exploring which effects to include

The present section describes an exploratory approach to model specification. A more advanced approach to testing model specifications is described in [Section 8](#).

For an exploration of further effects to be included, the following steps may be followed:

1. Estimate a model which includes a number of basic effects;
2. Simulate the model for these parameter values but also include some other relevant statistics among the simulated statistics;
3. Look at the  $t$ -values for these other statistics; effects with large  $t$ -values are candidates for inclusion in a next model.

It should be kept in mind, however, that this exploratory approach may lead to capitalization on chance, and also that the  $t$ -value obtained as a result of the straight simulations is conditional on the fixed parameter values used, without taking into account the fact that these parameter values are estimated themselves.

It is possible that for some model specifications the data set will lead to divergence, e.g., because the data contains too little information about this effect, or because some effects are ‘collinear’ with each other. In such cases one must find out which are the effects causing problems, and leave these out of the model. Simulation can be helpful to distinguish between the effects which should be fixed at a high positive or negative value and the effects which should be left out because they are superfluous.

When the distribution of the out-degrees is fitted poorly an improvement usually is possible either by including non-linear effects of the out-degrees in the evaluation function.

## 10.2 Convergence problems

If there are convergence problems, this may have several reasons.

- The data specification was incorrect (e.g., because the coding was not given properly).
- The starting values were poor. Try restarting from the standard initial values (a certain non-zero value for the density parameter, and zero values for the other parameters); or from values obtained as the estimates for a simpler model that gave no problems. The initial default parameter values can be obtained by choosing the **model option** “standard initial values”.
- The model does not fit well in the sense that even with well-chosen parameters it will not give a good representation of the data.

This can be the case, e.g., when there is a large heterogeneity between the actors which is not well represented by effects of covariates. The out-degrees and in-degrees are given in the begin of the **SIENA** output to be able to check whether there are outlying actors having very high in- or out-degrees, or a deviating dynamics in their degrees. Strong heterogeneity between the actors will have to be represented by suitable covariates; if these are not available, one may define one or a few dummy variables each representing an outlying actor, and give this dummy variable an ego

effect in the case of deviant out-degrees, and an alter effect in the case of deviant in-degrees.

Another possibility is that there is time heterogeneity. Indications about this can be gathered also from the descriptives given in the start of the output file: the number of changes upward and downward, in the network and also – if any – in the dependent behavioral variable. If these do not show a smooth or similar pattern across the observations, then it may be useful to include actor variables representing time trends. These could be smooth – e.g., linear – but they also could be dummy variables representing one or more observational periods; these must be included as an ego effect to represent time trends in the tendency to make ties (or to display higher values of the behavior in question).

- Too many weak effects are included. Use a smaller number of effects, delete non-significant ones, and increase complexity step by step. Retain parameter estimates from the last (simpler) model as the initial values for the new estimation procedure, provided for this model the algorithm converged without difficulties.
- Two or more effects are included that are almost collinear in the sense that they can both explain the same observed structures. This will be seen in high absolute values of correlations between parameter estimates. In this case it may be better to exclude one of these effects from the model.
- An effect is included that is large but of which the precise value is not well-determined (see above: [section on fixing parameters](#)). This will be seen in estimates and standard errors both being large and often in divergence of the algorithm. Fix this parameter to some large value. (Note: large here means, e.g., more than 5 or less than -5; depending on the effect, of course.)

If the algorithm is unstable, with parameter values (the left hand list in the SIENA window) changing too wildly, or with the algorithm suddenly seeming stuck and not moving forward, the a solution may be to simplify the model (perhaps later on making it more complex again in forward parameter estimation steps); another solution may be to decrease the initial gain parameter (parameter `firstg` in function `sienaModelCreate()`).

## 11 Multilevel network analysis

For combining SIENA results of several independent networks, there are three options. (‘Independent’ networks here means that the sets of actors are disjoint, and it may be assumed that there are no direct influences from one network to another.) The first two options assume that the parameters of the actor-based models for the different networks are the same – except for the basic rate parameters and for those differences that are explicitly modeled by interactions with dummy variables indicating the different networks. The first and third options require that the number of observations is the same for the different networks. This is not required for the second option. These methods can be applied for two or more networks.

The three options are:

1. Combining the different networks in one large network, indicating by structural zeros that ties between the networks are not permitted. This is explained in Section 4.1.2. The special effort to be made here is the construction of the data files for the large (combined) network.
2. Combining different sub-projects into one *multi-group* project. The ‘sub-projects’ are the same as the ‘different networks’ mentioned here. This is explained in Section 11.1. A difference between options 1 and 2 is that the use of structural zeros (option 1) will lead to a default specification where the rate parameters are equal across networks (this can be changed by making the rate dependent upon dummy actor variables that indicate the different networks) whereas the multi-group option yields rate parameters that are distinct across different networks.
3. Analyzing the different networks separately, without any assumption that parameters are the same but using the same model specification, and post-processing the output files by a meta-analysis using *siena08*. This is explained in Section 11.2.

The first and second options will yield nearly the same results, with the differences depending on the basic rate (and perhaps other) parameters that are allowed to differ between the different networks, and of course also depending on the randomness of the estimation algorithm. The second option is more ‘natural’ given the design of SIENA and will normally run faster than the first. Therefore the second option seems preferable to the first.

The third option makes much less assumptions because parameters are not constrained at all across the different networks. Therefore the arguments usual in statistical modeling apply: as far as assumptions is concerned, option 3 is safer; but if the assumptions are satisfied (or if they are a good approximation), then options 1 and 2 have higher power and are simpler. However, option 3 requires that each of the different network data sets is informative enough to lead to well-converged estimates; this will not always be the case for small data sets, and then options 1 or 2 are preferable.

When the data sets for the different networks are not too small individually, then a middle ground might be found in the following way. Start with option 3. This will show

for which parameters there are important differences between the networks. Next follow option 2, with interactions between the sub-project dummies and those parameters for which there were important between-network differences. This procedure may work less easily when the number of different networks is relatively high, because it may then lead to too many interactions with dummy variables.

### 11.1 Multi-group Siena analysis

The multi-group option ‘glues’ several projects (further referred to as *sub-projects*) after each other into one larger multi-group project. These sub-projects must have the same sets of variables of all kinds: that is, the list of dependent networks, dependent behavioral variables, actor covariates, and dyadic covariates must be the same for the various sub-projects. The number of actors and the number of observations can be different, however. These sub-projects then are combined into one project where the number of actors is the largest of the number of actors of the sub-projects, and the number of observations is the sum of the observations of the sub-projects. As an example, suppose that three projects with names `sub1`, `sub2`, and `sub3` are combined. Suppose `sub1` has 21 actors and 2 observations, `sub2` has 35 actors and 4 observations, and `sub3` has 24 actors with 5 observations. Then the combined multi-group project has 35 actors and 11 observations. The step from observation 2 to 3 switches from sub-project `sub1` to sub-project `sub2`, while the step from observation 6 to 7 switches from sub-project `sub2` to `sub3`. These switching steps do not correspond to simulations of the actor-based model, because that would not be meaningful.

The different sub-projects are considered to be unrelated except that they have the same model specification and the same parameter values. It is important to check that this is a reasonable assumption. One aspect of this is by looking at the descriptives for change produced by `print01Report`, and checking that the tendencies in the dependent variable or variables, upward/stable/downward, are not too different between the sub-projects. The `sienaTimetest` function can be used for formally testing this assumption. Moderate violations ( $p$ -values larger than 0.01) will probably be acceptable in the sense that the combined results still are a meaningful aggregate, strong violations are not acceptable and should be remedied by dropping some of the sub-projects or by including an interaction term.

Given the potentially large number of periods that can be implied by the multi-group option, it probably is advisable, when using Method of Moments estimation, to use the conditional estimation option.

### 11.2 Meta-analysis of Siena results

The function `siena08` is a meta-analysis method for SIENA. It combines estimates for a common model estimated for several data sets, that must have been obtained earlier. This function combines the estimates in a meta-analysis or multilevel analysis according to the methods of [Snijders and Baerveldt \(2003\)](#), and according to a Fisher-type combination of one-sided  $p$ -values.

Each parameter in the model is treated separately in the meta-analysis, without taking account of the dependencies between the parameters and their estimates. Denote the number of combined data sets by  $N$ . If we denote a given parameter (e.g., the coefficient of the reciprocity effect) by  $\theta$ , then the *true parameter values* for the  $N$  data sets are denoted  $\theta_1, \theta_2, \dots, \theta_N$ , while their *estimates* are denoted  $\hat{\theta}_1, \hat{\theta}_2, \dots, \hat{\theta}_N$ .

### 11.2.1 Meta-analysis directed at the mean and variance of the parameters

In this meta-analysis it is assumed that the data sets can be regarded as a sample from a population – i.e., a population of dynamic networks – and accordingly the true parameters  $\theta_j$  are a random sample from a population. If the number of data sets is small, e.g., less than 20, and especially if this number is less than 10, this assumption is not very attractive from a practical point of view, because the sample then would be quite small so the information obtained about the population is very limited.

The mean and variance in this population of parameters are denoted

$$\begin{aligned}\mu_\theta &= \mathcal{E} \theta_j , \\ \sigma_\theta^2 &= \text{var } \theta_j .\end{aligned}$$

Each of these parameters must have been estimated in a run of `siena07`, yielding the estimate  $\hat{\theta}_j$ , which is the true parameter plus a statistical error  $E_j$ :

$$\hat{\theta}_j = \theta_j + E_j .$$

The standard error of this estimate is denoted by  $s_j$ .

For each of the parameters  $\theta$ , the function `siena08` estimates the mean  $\mu_\theta$  and the variance  $\sigma_\theta^2$  of the distribution of  $\theta$ , and tests several hypotheses concerning these ‘meta-parameters’:

1. Test  $H_0^{(0)} : \mu_\theta = \sigma_\theta^2 = 0$  (all  $\theta_j = 0$ ), i.e., effect  $\theta$  is nil altogether.  
This is done by means of a chi-squared test statistic  $T^2$  with  $N$  d.f.
2. Estimate  $\mu_\theta$ .
3. Test  $H_0^{(1)} : \mu_\theta = 0$ .  
This is done by means of a standard normal test statistic  $t_{\mu_\theta}$ , being the ration of the estimate for  $\mu_\theta$  to its standard error.
4. Test  $H_0^{(2)} : \sigma_\theta^2 = 0$ , i.e.,  $\theta_j = \mu_\theta$  for all  $j$ .  
This is done by means of a chi-squared test statistic  $Q$  with  $N - 1$  d.f.
5. Estimate  $\sigma_\theta^2$ .

Two approaches are followed and presented in the output. The first is an iterative weighted least squares method based on [Cochran \(1954\)](#) and [Snijders and Baerveldt \(2003\)](#). The second is a likelihood-based method under the assumption of normal distributions: the estimators are maximum likelihood estimators; the associated confidence intervals are

based on profile likelihoods, and therefore will be asymmetric. The reported  $p$ -values for the population mean (hypothesis  $H_0^{(1)}$ ) are based on the  $t$  distribution with  $N - 1$  d.f. In all cases, it is possible that some of the data sets  $j$  are dropped for some of the parameters because the standard error  $s_j$  is too large (see below); in that case, the number  $N$  used here is the number of data sets actually used for the parameter under consideration.

For both of these two approaches, it is assumed that the true deviations  $\theta_j - \theta$  and the random errors  $E_j$  are uncorrelated. This is not always a plausible assumption; Fisher's combination, mentioned below, does not make this assumption. The plots of estimates versus standard errors, produced by using `siena08` and following it up by `plot.sienaMeta`, can be used as information about the plausibility of this assumption.

For testing the hypotheses mentioned here, it is also assumed that, given the true parameter values  $\theta_j$ , the estimates  $\hat{\theta}_j$  are approximately normally distributed with mean  $\theta_j$  and variance  $s_j^2$ . This is often a reasonable assumption.

The likelihood-based methods also assume that the true values  $\theta_j$  are normally distributed in the population. If this is a reasonable approach, the likelihood-based methods are preferable. A disadvantage of the iterative weighted least squares method is that results are possible where the outcome of the test of  $H_0^{(2)}$  is significant at a usual level of significance, i.e.,  $\sigma_\theta^2$  is thought to be positive, whereas the estimate is  $\hat{\sigma}_\theta^2 = 0$ . This potential inconsistency is possible because the test and the estimator in this approach are not directly related (cf. [Snijders and Baerveldt, 2003](#)). The likelihood-based method does not suffer from this problem because the maximum likelihood estimate always is contained in the confidence interval based on the profile likelihood.

There may be reasons to distrust the estimates which are large with also a large standard error. (This is known as the Donner-Hauck phenomenon in logistic regression.) Unfortunately, it is impossible to say in general what is to be regarded as a large standard error. A threshold of 4 or 5 for the standard error often is reasonable for most effects; if a tested parameter has a standard error larger than 4, then it is advisable to redo the analysis in a specification where this parameter only is fixed to 0 and a score test is carried out for this parameter. However, for some effects, in any case for the "average similarity" effect for behavior dynamics, parameters and standard errors tend to be larger, and a larger threshold (e.g. 10) is appropriate. The same holds for effects of covariates with small variances (less than .1).

### 11.2.2 Meta-analysis directed at testing the parameters

Another method for combining the various data sets, which does not make the assumption that the parameters are a sample from a population and also makes no assumptions of absence of correlation<sup>10</sup> between the true deviations  $\theta_j - \theta$  and the random errors  $E_j$ , is based on Fisher's method for combining independent  $p$ -values; the principle of this combination method of [Fisher \(1932\)](#) is described in [Hedges and Olkin \(1985\)](#) and (briefly) in [Snijders and Bosker \(1999, Chapter 3\)](#).

---

<sup>10</sup>This correlation is defined for the population of networks, and if the population does not exist then also the correlation is not defined.



This principle here is applied in a double test:

1. for detecting if there are any networks with a positive parameter value, the null hypothesis tested is  
 $H_0$  : For all networks, the value of this parameter is zero or less than zero;  
with the alternative hypothesis;  
 $H_1$  : For at least one network, the value of this parameter is greater than zero;
2. for detecting if there are any networks with a negative parameter value, the null hypothesis tested is  
 $H_0$  : For all networks, the value of this parameter is zero or greater than zero;  
with the alternative hypothesis  
 $H_1$  : For at least one network, the value of this parameter is less than zero.

For each of these combined tests, the  $p$ -value is given.

It is advisable to use for each the significance level of  $\alpha/2$  (e.g., 0.025 if  $\alpha = 0.05$ ) which yields an overall combined test at significance level  $\alpha$ . Note that four different overall results are possible. Indicating the right-sided and the left-sided  $p$ -values by  $p_r$  and  $p_l$ , respectively, these possible results are:

1.  $p_r > \alpha/2$ ,  $p_l > \alpha/2$ :  
No evidence for any nonzero parameter values;
2.  $p_r \leq \alpha/2$ ,  $p_l > \alpha/2$ :  
Evidence that some networks have a positive parameter value, no evidence for any negative parameter values;
3.  $p_r > \alpha/2$ ,  $p_l \leq \alpha/2$ :  
Evidence that some networks have a negative parameter value, no evidence for any positive parameter values;
4.  $p_r \leq \alpha/2$ ,  $p_l \leq \alpha/2$ :  
Evidence that some networks have a negative parameter value, and some others have a positive parameter value.

If all networks have a zero true parameter value, i.e., under the combined null hypothesis that  $\theta_j = 0$  for all  $j$ , the probability of result (1) is less than or equal to  $\alpha$ ; this is the way in which this combined test respects the overall probability of an error of the first kind.

### 11.2.3 Contrast between the two kinds of meta-analysis

To understand the contrast between the method following the Cochran approach for inference about a population of networks, and the Fisher approach for combining independent tests, the following may be helpful. Inferring about a population always adds some uncertainty; this is more serious when the sample size (here: number of combined networks) is larger. In the extreme case, consider the combination of  $N = 2$  networks, with estimates  $\hat{\theta}_1 = 1$ , standard error  $s_1 = 0.1$ , and  $\hat{\theta}_2 = 5$ ,  $s_2 = 0.1$ . Then for both of the groups the

$t$ -statistic  $\hat{\theta}_j/s_j$  is very large, leading to the conclusion that parameters  $\theta_1$  and  $\theta_2$  are very likely to be positive. This will lead to a significant result for Fisher's combination of tests. On the other hand, the mean in the population of networks, given that there is available a sample of size  $N = 2$ , cannot be determined with any degree of precision, so the confidence interval for this mean  $\mu_\theta$  will be huge, and the result for testing the null hypothesis  $H_0^{(1)}$  will not be significant. However, the results for testing  $H_0^{(0)}$  and  $H_0^{(2)}$  will be significant.

## 12 Mathematical definition of effects

Here, the mathematical formulae for the definition of the effects are given. In [Snijders \(2001, 2005\)](#) and [Steglich, Snijders, and Pearson \(2010\)](#), further background to these formulae can be found. The effects are grouped into effects for modelling network evolution and effects for modelling behavioral evolution (i.e., the dynamics of dependent actor variables). Within each group of effects, the effects are listed in the order in which they appear in SIENA. The short name of the effect (`shortName`), as it is specified in RSiena is specified in brackets.

For two-mode (bipartite) networks, only a subset of the effects is meaningful, since the first node set has only outgoing ties and the second only incoming; for example, the reciprocity effect is meaningless because there cannot be any reciprocal ties; the out-degree popularity effect is meaningless because it refers to incoming ties of actors with high out-degrees; and there are no similarity effects of actor covariates. There is one additional effect for two-mode networks, viz., the four-cycle effect.

Some of the effects contain a number which is denoted in this section by  $c$ , and called in this manual an *internal effect parameter*. (These are totally different from the statistical parameters which are the weights of the effects in the objective function.)

### 12.1 Network evolution

The model of network evolution consists of the model of actors' decisions to establish new ties or dissolve existing ties (according to *evaluation* and *endowment functions*) and the model of the timing of these decisions (according to the *rate function*). The objective function of the actor is the sum of the network evaluation function and the network endowment function

$$u^{\text{net}}(x) = f^{\text{net}}(x) + g^{\text{net}}(x) , \quad (6)$$

and a random term; where the evaluation function  $f^{\text{net}}(x)$  and the endowment function  $g^{\text{net}}(x)$  are as defined in the following subsections.

For some effects the endowment function is implemented not for estimation by the Method of Moments but only by the Maximum Likelihood or Bayesian method; this is indicated below by “endowment effect only likelihood-based”.

(It may be noted that the network evaluation function was called objective function, and the endowment function was called gratification function, in [Snijders \(2001\)](#).)

#### 12.1.1 Network evaluation function

The network evaluation function for actor  $i$  is defined as

$$f^{\text{net}}(x) = \sum_k \beta_k^{\text{net}} s_{ik}^{\text{net}}(x) \quad (7)$$

where  $\beta_k^{\text{net}}$  are parameters and  $s_{ik}^{\text{net}}(x)$  are effects as defined below.

The potential effects in the network evaluation function are the following. Note that in all effects where a constants  $c$  occurs, this constant can be chosen and changed by the user; this is the internal effect parameter mentioned above. For non-directed networks, the same formulae are used, unless a different formula is given explicitly.

### **Structural effects**

Structural effects are the effects depending on the network only.

1. *out-degree effect* or *density effect* (**density**), defined by the out-degree  
 $s_{i1}^{\text{net}}(x) = x_{i+} = \sum_j x_{ij}$ ,  
where  $x_{ij} = 1$  indicates presence of a tie from  $i$  to  $j$  while  $x_{ij} = 0$  indicates absence of this tie;
2. *reciprocity effect* (**recip**), defined by the number of reciprocated ties  
 $s_{i2}^{\text{net}}(x) = \sum_j x_{ij} x_{ji}$ ;
3. *transitive triplets effect* (**transTrip**), defined by the number of transitive patterns in  $i$ 's relations (ordered pairs of actors  $(j, h)$  to both of whom  $i$  is tied, while also  $j$  is tied to  $h$ ),  
for directed networks,  $s_{i3}^{\text{net}}(x) = \sum_{j,h} x_{ij} x_{ih} x_{jh}$  ;  
and for non-directed networks,  $s_{i3}^{\text{net}}(x) = \sum_{j < h} x_{ij} x_{ih} x_{jh}$  ;  
there was an error here until version 3.313, which amounted to combining the transitive triplets and transitive mediated triplets effects;
4. *transitive mediated triplets effect* (**transMedTrip**), defined by the number of transitive patterns in  $i$ 's relations where  $i$  has the mediating position (ordered pairs of actors  $(j, h)$  for which  $j$  is tied to  $i$  and  $i$  to  $h$ , while also  $j$  is tied to  $h$ ), which is different from the transitive triplets effect only for directed networks,  
 $s_{i4}^{\text{net}}(x) = \sum_{j,h} x_{ji} x_{ih} x_{jh}$  ;  
this cannot be used together with the transitive triplets effect in Method of Moments estimation, because of perfect collinearity of the fit statistics;
5. *number of three-cycles* (**cycle3**),  
 $s_{i5}^{\text{net}}(x) = \sum_{j,h} x_{ij} x_{jh} x_{hi}$  ;
6. for two-mode networks: the *number of four-cycles* (**cycle4**),  
 $s_{i6}^{\text{net}}(x) = \sum_{i_1, i_2, j_1, j_2} x_{i_1 j_1} x_{i_1 j_2} x_{i_2 j_1} x_{i_2 j_2}$  ;  
for parameter  $p = 2$  the square root is taken;
7. *transitive ties effect* (**transTies**) (earlier called *(direct and indirect ties) effect*), defined by the number of actors to whom  $i$  is directly as well as indirectly tied,  
 $s_{i7}^{\text{net}}(x) = \sum_j x_{ij} \max_h (x_{ih} x_{hj})$ ;
8. *betweenness count* (**between**),  
 $s_{i8}^{\text{net}}(x) = \sum_{j,h} x_{hi} x_{ij} (1 - x_{hj})$  ;

9. *balance* (**balance**), defined by the similarity between the outgoing ties of actor  $i$  and the outgoing ties of the other actors  $j$  to whom  $i$  is tied,

$$s_{i9}^{\text{net}}(x) = \sum_{j=1}^n x_{ij} \sum_{\substack{h=1 \\ h \neq i,j}}^n (b_0 - |x_{ih} - x_{jh}|),$$

where  $b_0$  is a constant included to reduce the correlation between this effect and the density effect, defined by

$$b_0 = \frac{1}{(M-1)n(n-1)(n-2)} \sum_{m=1}^{M-1} \sum_{i,j=1}^n \sum_{\substack{h=1 \\ h \neq i,j}}^n |x_{ih}(t_m) - x_{jh}(t_m)|.$$

This may also be regarded as *structural equivalence with respect to outgoing ties*. (In SIENA versions before 3.324, this was divided by  $n-2$ , which for larger networks tended to lead to quite large estimates and standard errors. Therefore in version 3.324, the division by  $n-2$  – which had not always been there – was dropped.)

10. *structural equivalence effect with respect to incoming ties* (**inStructEq**), which is an analogue to the balance effect but now considering similarity with respect to incoming ties,

$$s_{i10}^{\text{net}}(x) = \sum x_{ij} d_{ij} \tag{8a}$$

with

$$d_{ij} = \sum_{\substack{h=1 \\ h \neq i,j}}^n (b_0 - |x_{hi} - x_{hj}|). \tag{8b}$$

This effect is not quite finalized yet, because provisionally  $b_0 = 0$  instead of a mean of the subtracted values like in the balance effect. Subtraction of the mean will lead to better convergence properties.

11. *number of distances two effect* (**nbrDist2**), defined by the number of actors to whom  $i$  is indirectly tied (through at least one intermediary, i.e., at sociometric distance 2),

$$s_{i11}^{\text{net}}(x) = \#\{j \mid x_{ij} = 0, \max_h (x_{ih} x_{hj}) > 0\};$$

endowment effect only likelihood-based because the Method of Moments estimators for endowment effects are based on the ‘loss’ associated with terminated ties, and this cannot be straightforwardly applied for the number of distances two effect.

12. *number of doubly achieved distances two effect* (**nbrDist2twice**), defined by the number of actors to whom  $i$  is not directly tied, and tied through twopaths via at least two intermediaries,

$$s_{i12}^{\text{net}}(x) = \#\{j \mid x_{ij} = 0, \sum_h (x_{ih} x_{hj}) \geq 2\};$$

endowment effect only likelihood-based;

13. *number of dense triads (denseTriads)*, defined as triads containing at least  $c$  ties,  
 $s_{i13}^{\text{net}}(x) = \sum_{j,h} x_{ij} I\{x_{ij} + x_{ji} + x_{ih} + x_{hi} + x_{jh} + x_{hj} \geq c\}$ ,  
 where the ‘indicator function’  $I\{A\}$  is 1 if the condition  $A$  is fulfilled and 0 otherwise,  
 and where  $c$  is either 5 or 6;  
 (this effect is superfluous and undefined for symmetric networks);
14. *number of (unilateral) peripheral relations to dense triads*,  
 $s_{i14}^{\text{net}}(x) = \sum_{j,h,k} x_{ij}(1-x_{ji})(1-x_{hi})(1-x_{ki})I\{(x_{jh} + x_{hj} + x_{jk} + x_{kj} + x_{hk} + x_{kh}) \geq c\}$ ,  
 where  $c$  is the same constant as in the *dense triads* effect;  
 for symmetric networks, the ‘unilateral’ condition is dropped, and the definition is  
 $s_{i14}^{\text{net}}(x) = \sum_{j,h,k} x_{ij}(1-x_{hi})(1-x_{ki})I\{(x_{jh} + x_{hj} + x_{jk} + x_{kj} + x_{hk} + x_{kh}) \geq c\}$ ;
15. *in-degree related popularity effect (inPop)* (earlier called *popularity* or *popularity of alter effect*), defined by the sum of the in-degrees of the others to whom  $i$  is tied,  
 $s_{i15}^{\text{net}}(x) = \sum_j x_{ij} x_{+j} = \sum_j x_{ij} \sum_h x_{hj}$ ;  
 until version 3.313, this effect was multiplied by a factor  $1/n$ ;
16. *in-degree related popularity (sqrt) effect (inPopSqrt)* (earlier called *popularity of alter (sqrt measure) effect*), defined by the sum of the square roots of the in-degrees of the others to whom  $i$  is tied,  
 $s_{i16}^{\text{net}}(x) = \sum_j x_{ij} \sqrt{x_{+j}} = \sum_j x_{ij} \sqrt{\sum_h x_{hj}}$ ;  
 this often works better in practice than the raw popularity effect; also it is often reasonable to assume that differences between high in-degrees are relatively less important than the same differences between low in-degrees;
17. *out-degree related popularity effect (outPop)* (earlier called *activity* or *activity of alter effect*), defined by the sum of the out-degrees of the others to whom  $i$  is tied,  
 $s_{i17}^{\text{net}}(x) = \sum_j x_{ij} x_{j+} = \sum_j x_{ij} \sum_h x_{jh}$ ;  
 until version 3.313, this effect was multiplied by a factor  $1/n$ ;
18. *out-degree related popularity (sqrt) effect (outPopSqrt)* (earlier called *activity of alter (sqrt measure) effect*), defined by the sum of the square roots of the out-degrees of the others to whom  $i$  is tied,  
 $s_{i18}^{\text{net}}(x) = \sum_j x_{ij} \sqrt{x_{j+}} = \sum_j x_{ij} \sqrt{\sum_h x_{jh}}$ ;  
 this often works better in practice than the raw activity effect for the same reasons as mentioned above for the sqrt measure of the popularity effect;
- ⊙ for non-directed networks, the popularity and activity effects are taken together as “degree effects”, since in-degrees and out-degrees are the same in this case;
19. *in-degree related activity effect, (inAct)* defined as the cross-product of the actor’s in- and out-degrees,  
 $s_{i19}^{\text{net}}(x) = x_{i+} x_{+i}$ ;  
 endowment effect only likelihood-based;
20. *in-degree related activity (sqrt) effect, (inActSqrt)* defined by  
 $s_{i20}^{\text{net}}(x) = x_{i+} \sqrt{x_{+i}}$ ;

21. *out-degree related activity effect* (**outAct**), defined as the squared out-degree of the actor,  $s_{i21}^{\text{net}}(x) = x_{i+}^2$ ;  
endowment effect only likelihood-based;
22. *out-degree related activity (sqrt) effect* (**outActSqrt**) (earlier called *out-degree<sup>1.5</sup>*), defined by  
 $s_{i22}^{\text{net}}(x) = x_{i+}^{1.5} = x_{i+} \sqrt{x_{i+}}$   
endowment effect only likelihood-based;
23. *out-degree up to c (truncated out-degree)*, where  $c$  is some constant (internal effect parameter, see above), (**outTrunc**), defined by  
 $s_{i23}^{\text{net}}(x) = \min(x_{i+}, c)$ ;
24. *square root out-degree*, defined by  
 $s_{i24}^{\text{net}}(x) = \sqrt{x_{i+}}$ ;  
this is left out in later versions of SIENA;
25. *squared (out-degree - c)*, where  $c$  is some constant, defined by  
 $s_{i25}^{\text{net}}(x) = (x_{i+} - c)^2$ ,  
where  $c$  is chosen to diminish the collinearity between this and the density effect;  
this is left out in later versions of SIENA;
26. *sum of (1/(out-degree + c))* (**outInv**), where  $c$  is some constant, defined by  
 $s_{i26}^{\text{net}}(x) = 1/(x_{i+} + c)$ ;  
endowment effect only likelihood-based;
27. *sum of (1/(out-degree + c)(out-degree + c + 1))* (**outSqInv**), where  $c$  is some constant, defined by  
 $s_{i27}^{\text{net}}(x) = 1/(x_{i+} + c)(x_{i+} + c + 1)$ ;  
endowment effect only likelihood-based.
28. *out-out degree<sup>1/c</sup> assortativity* (**outOutAss**), which represents the differential tendency for actors with high out-degrees to be tied to other actors who likewise have high out-degrees,  
 $s_{i28}^{\text{net}}(x) = \sum_j x_{ij} x_{i+}^{1/c} x_{j+}^{1/c}$ ;  
 $c$  can be 1 or 2 (the latter value is the default);
29. *out-in degree<sup>1/c</sup> assortativity* (**outInAss**), which represents the differential tendency for actors with high out-degrees to be tied to other actors who have high in-degrees,  
 $s_{i29}^{\text{net}}(x) = \sum_j x_{ij} x_{i+}^{1/c} x_{+j}^{1/c}$ ;  
 $c$  can be 1 or 2 (the latter value is the default);
30. *in-out degree<sup>1/c</sup> assortativity* (**inOutAss**), which represents the differential tendency for actors with high in-degrees to be tied to other actors who have high out-degrees,

$s_{i30}^{\text{net}}(x) = \sum_j x_{ij} x_{+i}^{1/c} x_{+j}^{1/c}$ ;  
 $c$  can be 1 or 2 (the latter value is the default);

31. *in-in degree<sup>1/c</sup> assortativity (inInAss)*, which represents the differential tendency for actors with high in-degrees to be tied to other actors who likewise have high in-degrees,

$s_{i31}^{\text{net}}(x) = \sum_j x_{ij} x_{+i}^{1/c} x_{+j}^{1/c}$ ;  
 $c$  can be 1 or 2 (the latter value is the default);

### ***Dyadic covariate effects***

The effects for a dyadic covariate  $w_{ij}$  are

32. *covariate (centered) main effect (X)*,

$s_{i32}^{\text{net}}(x) = \sum_j x_{ij} (w_{ij} - \bar{w})$   
 where  $\bar{w}$  is the mean value of  $w_{ij}$ ;


33. *covariate (centered)  $\times$  reciprocity (XRecip)*,

$s_{i33}^{\text{net}}(x) = \sum_j x_{ij} x_{ji} (w_{ij} - \bar{w})$ .

- ⊙ Three different ways can be modeled in which a triadic combination can be made between the dyadic covariate and the network. In the explanation, the dyadic covariate is regarded as a weighted network (which will be reduced to a non-weighted network if  $w_{ij}$  only assumes the values 0 and 1). By way of exception, the dyadic covariate is not centered in these three effects (to make it better interpretable as a network). In the text and the pictures, an arrow with the letter  $W$  represents a tie according to the weighted network  $W$ .

34. *WW  $\Rightarrow$  X closure of covariate (WWX)*,


$s_{i34}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} w_{hj}$ ;  
 this refers to the closure of  $W - W$  two-paths; each  $W - W$  two-path  $i \xrightarrow{W} h \xrightarrow{W} j$  is weighted by the product  $w_{ih} w_{hj}$  and the sum of these product weights measures the strength of the tendency toward closure of these  $W - W$  twopaths by a tie.



Since the dyadic covariates are represented by square arrays and not by edgelist, this will be a relatively time-consuming effect if the number of nodes is large.


35. *WX  $\Rightarrow$  X closure of covariate (WXX)*,

$s_{i35}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} x_{hj}$ ;  
 this refers to the closure of mixed  $W - X$  two-paths; each  $W - X$  two-path  $i \xrightarrow{W} h \rightarrow j$  is weighted by  $w_{ih}$  and the sum of these weights measures the strength of the tendency toward closure of these mixed  $W - X$  twopaths by a tie;





36.  $XW \Rightarrow X$  closure of covariate (**XWX**),  
 $s_{i36}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} x_{ih} w_{hj}$ ;  
 this refers to the closure of mixed  $X-W$  two-paths; each  $X-W$  two-path  $i \rightarrow h \xrightarrow{W} j$  is weighted by  $w_{hj}$  and the sum of these weights measures the strength of the tendency toward closure of these mixed  $X-W$  twopaths by a tie.



### Monadic covariate effects

For actor-dependent covariates  $v_j$  (recall that these are centered internally by SIENA) as well as for dependent behavior variables (for notational simplicity here also denoted  $v_j$ ; these variables also are centered), the following effects are available:

37. *covariate-alter* or *covariate-related popularity* (**altX**), defined by the sum of the covariate over all actors to whom  $i$  has a tie,  
 $s_{i37}^{\text{net}}(x) = \sum_j x_{ij} v_j$ ;
38. *covariate squared - alter* or *squared covariate-related popularity* (**altSqX**), defined by the sum of the squared centered covariate over all actors to whom  $i$  has a tie, (not included if the variable has range less than 2)  
 $s_{i38}^{\text{net}}(x) = \sum_j x_{ij} v_j$ ;
39. *covariate-ego* or *covariate-related activity* (**egoX**), defined by  $i$ 's out-degree weighted by his covariate value,  
 $s_{i39}^{\text{net}}(x) = v_i x_{i+}$ ;
40. *covariate-related similarity* (**simX**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^v$  between  $i$  and the other actors  $j$  to whom he is tied,  
 $s_{i40}^{\text{net}}(x) = \sum_j x_{ij} (\text{sim}_{ij}^v - \widehat{\text{sim}}^v)$ ,  
 where  $\widehat{\text{sim}}^v$  is the mean of all similarity scores, which are defined as  $\text{sim}_{ij}^v = \frac{\Delta - |v_i - v_j|}{\Delta}$  with  $\Delta = \max_{ij} |v_i - v_j|$  being the observed range of the covariate  $v$  (this mean is given in the output file just before the "initial data description");
41. *covariate-related similarity  $\times$  reciprocity* (**simRecipX**), defined by the sum of centered similarity scores for all reciprocal dyads in which  $i$  is situated,  
 $s_{i41}^{\text{net}}(x) = \sum_j x_{ij} x_{ji} (\text{sim}_{ij}^v - \widehat{\text{sim}}^v)$ ;
42. *same covariate*, which can also be called *covariate-related identity* (**sameX**), defined by the number of ties of  $i$  to all other actors  $j$  who have exactly the same value on the covariate,  
 $s_{i42}^{\text{net}}(x) = \sum_j x_{ij} I\{v_i = v_j\}$ ,  
 where the indicator function  $I\{v_i = v_j\}$  is 1 if the condition  $\{v_i = v_j\}$  is satisfied, and 0 if it is not;

43. *same covariate  $\times$  reciprocity* (**sameXRecip**) defined by the number of reciprocated ties between  $i$  and all other actors  $j$  who have exactly the same value on the covariate,  
 $s_{i43}^{\text{net}}(x) = \sum_j x_{ij} x_{ji} I\{v_i = v_j\};$
44. *covariate-ego  $\times$  alter* (**egoXaltX**), defined by the product of  $i$ 's covariate and the sum of those of his alters,  
 $s_{i44}^{\text{net}}(x) = v_i \sum_j x_{ij} v_j;$
45. *covariate-ego  $\times$  alter  $\times$  reciprocity* (**egoXaltXRecip**), defined by the product of  $i$ 's covariate and the sum of those of his reciprocated alters,  
 $s_{i45}^{\text{net}}(x) = v_i \sum_j x_{ij} x_{ji} v_j;$
46. *ego  $>$  alter for covariate* (**higher**), defined by the number of ties where  $i$ 's covariate is larger than alter's, while equality counts for half,  
 $s_{i46}^{\text{net}}(x) = \sum_j x_{ij} \text{dsign}(v_i - v_j),$   
 where  $\text{dsign}(d) = 0$  for  $d < 0$ ,  $0.5$  for  $d = 0$ , and  $1$  for  $d > 0$ .
47. *covariate of indirect ties* (**IndTies**), defined by the sum of the covariate over the actors to whom  $i$  is tied indirectly (at a geodesic distance of 2),  
 $s_{i47}^{\text{net}}(x) = \sum_j (1 - x_{ij}) (\max_h x_{ih} x_{hj}) v_j.$

The following group of effects uses an auxiliary variable  $\check{v}_i$  which can be called “alters’  $v$ -average”. It is described as the average value of  $v_j$  for those to whom  $i$  is tied, and defined mathematically by

$$\check{v}_i = \begin{cases} \frac{\sum_j x_{ij} v_j}{x_{i+}} & \text{if } x_{i+} > 0 \\ 0 & \text{if } x_{i+} = 0. \end{cases} \quad (9)$$

(Since  $v$  is centered, the value of 0 in case  $x_{i+} = 0$  is also the mean value of the original variable.)

(It may be noted that this constructed variable  $\check{v}_i$  will not itself have exactly a zero mean generally.)

Note that this value is being updated during the simulations. Network changes will change  $\check{v}_i$ ; if  $v_i$  is a dependent behavior variable, then behaviour changes will also change  $\check{v}_i$ .

In the following list, there is no ego effect, because the ego effect of  $\check{v}_i$  would be the same as the alter effect of  $v_i$ .

48. *covariate - alter at distance 2* (**altDist2**). This effect is associated with an effect parameter which can have values 1 or 2. For parameter 1, it is defined as the sum of alters’ covariate-average over all actors to whom  $i$  has a tie,

$$s_{i48}^{\text{net}}(x) = \sum_j x_{ij} \check{v}_j \quad (\text{parameter } 1)$$

For parameter 2, it is defined similarly, but for an alters' covariate-average excluding ego:

$$s_{i48}^{\text{net}}(x) = \sum_j x_{ij} \check{v}_j^{(-i)} \quad (\text{parameter 2})$$

where

$$\check{v}_j^{(-i)} = \begin{cases} \frac{\sum_{h \neq j} x_{jh} v_h}{x_{j+} - x_{ji}} & \text{if } x_{j+} - x_{ji} > 0 \\ 0 & \text{if } x_{j+} - x_{ji} = 0. \end{cases} \quad (10)$$

To compute the contribution for this effect, note that

$$\sum_j x_{ij} \check{v}_j^{(-i)} = \sum_j x_{ij} \frac{x_{j+} \check{v}_j - x_{ji} v_i}{x_{j+} - x_{ji}}$$

This shows that, given that  $\check{v}_j$  is being updated for all  $j$ , the contribution for this effect for parameter 2 can be computed as

$$\frac{x_{j+} \check{v}_j - x_{ji} v_i}{x_{j+} - x_{ji}}$$

(where  $0/0$  is interpreted as 0).

49. *covariate - similarity at distance 2 (simDist2)* , defined as the sum of centered similarity values for alters' covariate-average between  $i$  and all actors  $j$  to whom  $i$  has a tie,

$$s_{i49}^{\text{net}}(x) = \sum_j x_{ij} (\text{sim}(\check{v})_{ij} - \widehat{\text{sim}(\check{v})}) ,$$

where the similarity scores  $\text{sim}(\check{v})_{ij}$  are defined as

$$\text{sim}(\check{v})_{ij} = \frac{\Delta - |\check{v}_i - \check{v}_j|}{\Delta} ,$$

while  $\Delta = \max_{ij} |v_i - v_j|$  is the observed range of the *original* covariate  $v$ , and  $\widehat{\text{sim}(\check{v})}$  is the *observed* mean of all these similarity scores; this observed mean is defined by calculating the  $\check{v}_i$  values for each of the observations  $t_1$  to  $t_{M-1}$ , and averaging these

$(M-1)n(n-1)$  (or  $(M-1)n(n-1)/2$ ) similarity values.

### 12.1.2 Multiple network effects

If there are multiple dependent networks, the definition of cross-network effects is such that always, one network has the role of the dependent variable, while the other network, or networks, have the role of explanatory variable(s). In the following list the network in

the role of dependent variable is denoted by the tie variables  $x_{ij}$ , while the tie variables  $w_{ij}$  denote the network that is the explanatory variable.

Various of these effects are applicable only if the networks  $X$  and  $W$  satisfy certain conditions of conformability; for example, the first effect of  $W$  on  $X$  is meaningful only if  $W$  and  $X$  have the same dimensions, i.e., either both are one-mode networks, or both are two-mode networks with the same actor set for the second mode; as another example, the second effect, of incoming  $W$  on  $X$ , is applicable only if  $W$  and  $X$  are one-mode networks. These conditions are hopefully clear from logical considerations, and drawing a little diagram of the involved nodes and arrows will be helpful in cases of doubt.

In the SIENA output for projects with multiple networks, the dependent network in each given effect is indicated by the first part of the effect name. In the list below, a more or less normally formulated name is given first, then the name used in SIENA between parentheses, using  $X$  as the name for the dependent network and  $W$  as the name for the explanatory network, then between parentheses in **typewriter font** the `shortName` as used by RSiena. Since this is a co-evolution model, SIENA will include also the effects where the roles of  $X$  and  $W$  are reversed.

The first three effects are dyadic. The first can be regarded as a main effect; the reciprocity and mutuality effects will require rather big data sets to be empirically distinguished from each other.

1. *Effect of  $W$  on  $X$  ( $X$ :  $W$ )* (**crprod**),  
 $s_{i1}^{\text{net}}(x) = \sum_j x_{ij} w_{ij}$  ;  
 $i \xrightarrow{W} j$  leads to  $i \xrightarrow{X} j$ ;
2. *Effect of incoming  $W$  on  $X$  ( $X$ : reciprocity with  $W$ )* (**crprodRecip**),  
 $s_{i2}^{\text{net}}(x) = \sum_j x_{ij} w_{ji}$  ;  
this can be regarded as generalized exchange:  $j \xrightarrow{W} i$  leads to  $i \xrightarrow{X} j$ ;
3. *Effect of mutual ties in  $W$  on  $X$  ( $X$ : mutuality with  $W$ )* (**crprodMutual**),  
 $s_{i3}^{\text{net}}(x) = \sum_j x_{ij} w_{ij} w_{ji}$  ;  
 $j \xleftrightarrow{W} i$  leads to  $i \xrightarrow{X} j$ ;

The following five are degree-related effects, where nodal degrees in the  $W$  network have effects on popularity or activity in the  $X$  network. They use an internal effect parameter  $p$ , which mostly will be 1 or 2.

To decrease correlation with other effects, the  $W$ -degrees are centered by subtracting the value  $\bar{w}$ , which is the average degree of  $W$  across all observations.

THIS VALUE SHOULD BE GIVEN AS THE AVERAGE DEGREE IN THE INITIAL PART OF THE OUTPUT.

4. *Effect of in-degree in  $W$  on  $X$ -popularity* ( $X$ :  $\text{indegree}^{1/p} W$  popularity) (**inPopIntn**)  
defined by the sum of the  $W$ -in-degrees of the others to whom  $i$  is tied, for parameter  $p = 2$  the square roots of the  $W$ -in-degrees:  
 $s_{i4}^{\text{net}}(x) = \sum_j x_{ij} (w_{+j} - \bar{w})^{1/p}$ ;


5. *Effect of in-degree in W on X-activity* ( $X$ :  $\text{indegree}^{1/p}$   $W$  activity) (**inActIntn**)  
defined by the  $W$ -in-degrees of  $i$  (for  $p = 2$  its square root) times  $i$ 's  $X$ -out-degree:  
 $s_{i5}^{\text{net}}(x) = \sum_j x_{ij} (w_{+i} - \bar{w})^{1/p} = x_{i+} (w_{+i} - \bar{w}_{+})^{1/p}$ ;
6. *Effect of out-degree in W on X-popularity* ( $X$ :  $\text{outdegree}^{1/p}$   $W$  popularity) (**outPopIntn**)  
defined by the sum of the  $W$ -out-degrees of the others to whom  $i$  is tied, for parameter  $p = 2$  the square roots of the  $W$ -out-degrees:  
 $s_{i6}^{\text{net}}(x) = \sum_j x_{ij} (w_{j+} - \bar{w})^{1/p}$ ;
7. *Effect of out-degree in W on X-activity* ( $X$ :  $\text{outdegree}^{1/p}$   $W$  activity) (**outActIntn**)  
defined by the  $W$ -out-degrees of  $i$  (for  $p = 2$  its square root) times  $i$ 's  $X$ -out-degree:  
 $s_{i7}^{\text{net}}(x) = \sum_j x_{ij} (w_{i+} - \bar{w})^{1/p} = x_{i+} (w_{i+} - \bar{w})^{1/p}$ ;
8. *Effect of both in-degrees in W on X-popularity* ( $X$ : both  $\text{indegrees}^{1/p}$   $W$ ) (**both**)  
defined by the sum of the  $W$ -in-degrees of the others to whom  $i$  is tied multiplied by the centered  $W$ -in-degree of  $i$ , for parameter  $p = 2$  the square roots of the  $W$ -in-degrees:  
 $s_{i8}^{\text{net}}(x) = \sum_j x_{ij} (w_{+i} - \bar{w})^{1/p} (w_{+j} - \bar{w})^{1/p}$ ;  
this can be regarded as an interaction between the effect of  $W$ -in-degree on  $X$ -popularity and the effect of  $W$ -in-degree on  $X$ -activity.

The betweenness effect is another positional effect: a positional characteristic in the  $W$  network affects the ties in the  $X$  network, but now the position is the betweenness count, defined as the number of pairs of nodes that are not directly connected:  $j \xrightarrow{W} h$ , but that are connected through  $i$ :  $j \xrightarrow{W} i \xrightarrow{X} h$ . Again there is an internal effect parameter  $p$ , usually 1 or 2.

9. *Effect of W-betweenness on X-popularity* ( $X$ :  $\text{betweenness}^{1/p}$   $W$  popularity) (**betweenPop**)  
defined by the sum of the  $W$ -betweenness counts of the others to whom  $i$  is tied:  
 $s_{i9}^{\text{net}}(x) = \sum_j x_{ij} \left( \sum_{h,k; h \neq k} w_{hj} w_{jk} (1 - w_{hk}) \right)^{1/p}$ ;

Further there are four mixed triadic effects.


10. *agreement along W leading to X*, ( $X$ : from  $W$  agreement) (**from**)  
 $s_{i10}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} w_{jh}$ ;  
this refers to agreement of actors with respect to their  $W$ -choices (structural equivalence with respect to outgoing  $W$ -choices); the contribution of the tie  $i \xrightarrow{X} j$  is proportional to the number of joint  $W$  choices of others,  $i \xrightarrow{W} h \xleftarrow{W} j$ .



11. *agreement along mutual W-ties leading to X*, ( $X$ : from  $W$  mutual agreement) (**fromMutual**)

$$s_{i11}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} w_{hi} w_{jh} w_{hj};$$

this refers to agreement of actors with respect to their mutual  $W$ -choices (structural equivalence with respect to mutual  $W$ -choices); the contribution of the tie  $i \xrightarrow{X} j$  is proportional to the number of joint mutual  $W$  choices of others,  $i \xleftrightarrow{W} h \xleftrightarrow{W} j$ .




12. *W leading to agreement along X*, ( $X$ :  $W$  to agreement) (**to**)

$$s_{i12}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} x_{hj};$$

this refers to the closure of mixed  $W - X$  two-paths; the contribution of the tie  $i \xrightarrow{X} j$  is proportional to the number of mixed  $W - x$  two-paths  $i \xrightarrow{W} h \xrightarrow{X} j$ .

Note that since this is the evaluation function for actor  $i$  with respect to network  $X$ , only the  $x_{ij}$  tie indicator in the formula, corresponding to the tie  $i \xrightarrow{X} j$ , is the dependent variable here. The interpretation is that actors have the tendency to make the same outgoing  $X$ -choices as those to whom they have a  $W$ -tie.




13. *mixed WW => X closure*, ( $X$ : closure of  $W$ ) (**closure**)

$$s_{i13}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} w_{hj};$$

this refers to the closure of  $W - W$  two-paths; the contribution of the tie  $i \xrightarrow{X} j$  is proportional to the number of  $W - W$  two-paths  $i \xrightarrow{W} h \xrightarrow{W} j$ .

The interpretation is that actors have the tendency to make and maintain  $X$ -ties to those to whom they have an indirect (distance 2)  $W$ -tie: ‘ $W$ -ties of  $W$ -ties tend to become  $X$ -ties’.




Then there is a mixed triadic effect restricted to triples with the same value on a covariate.

14. *agreement along W leading to X, for same V*, (**covNetNet**)

$$s_{i14}^{\text{net}}(x) = \sum_{j \neq h} x_{ij} w_{ih} w_{jh} I\{v_i = v_j\};$$

this refers to agreement of actors with respect to their  $W$ -choices (structural equivalence with respect to outgoing  $W$ -choices), but only for actors and choices sharing the same value of a covariate  $V$ ; the contribution of the tie  $i \xrightarrow{X} j$  is proportional to the number of joint  $W$  choices of others,  $i \xrightarrow{W} h \xleftarrow{W} j$ , counting only those for which  $v_i = v_j = v_h$ .



There are two effects similar to the effects described above depending on the auxiliary variable  $\check{v}_i$ , ‘alters’  $v$ -average’. Now the ‘alter’ is defined, however, by the other network

$W$ . Thus,  $W$ -alters'  $v$ -average  $\check{v}_i^W$  is defined by

$$\check{v}_i^W = \begin{cases} \frac{\sum_j w_{ij} v_j}{w_{i+}} & \text{if } w_{i+} > 0 \\ 0 & \text{if } w_{i+} = 0. \end{cases} \quad (11)$$

15. *covariate - alter at W-distance 2 (altDist2W)*

This effect is associated with an effect parameter which can have values 1 or 2. For parameter 1, it is defined as the sum of  $W$ -alters' covariate-average over all actors to whom  $i$  has a tie,

$$s_{i15}^{\text{net}}(x) = \sum_j x_{ij} \check{v}_j^W \quad (\text{parameter 1}).$$

For parameter 2, it is defined similarly, but for an alters' covariate-average excluding ego:

$$s_{i15}^{\text{net}}(x) = \sum_j x_{ij} \check{v}_j^{W(-i)} \quad (\text{parameter 2})$$

where

$$\check{v}_j^{W(-i)} = \begin{cases} \frac{\sum_{h \neq j} w_{jh} v_h}{w_{j+} - w_{ji}} & \text{if } w_{j+} - w_{ji} > 0 \\ 0 & \text{if } w_{j+} - w_{ji} = 0. \end{cases} \quad (12)$$

16. *covariate - similarity at W-distance 2 (simDist2W)*, defined as the sum of centered similarity values for alters' covariate-average between  $i$  and all actors  $j$  to whom  $i$  has a tie,

$$s_{i16}^{\text{net}}(x) = \sum_j x_{ij} (\text{sim}(\check{v}^W)_{ij} - \widehat{\text{sim}(\check{v}^W)}) ,$$

where the similarity scores  $\text{sim}(\check{v}^W)_{ij}$  are defined as

$$\text{sim}(\check{v}^W)_{ij} = \frac{\Delta - |\check{v}_i^W - \check{v}_j^W|}{\Delta} ,$$

while  $\Delta = \max_{ij} |v_i - v_j|$  is the observed range of the *original* covariate  $v$ , and  $\widehat{\text{sim}(\check{v}^W)}$  is the *observed* mean of all these similarity scores; this observed mean is defined by calculating the  $\check{v}_i^W$  values for each of the observations  $t_1$  to  $t_{M-1}$ , and averaging these

$(M-1)n(n-1)$  (or  $(M-1)n(n-1)/2$ ) similarity values.

### 12.1.3 Network endowment function

The network endowment function is the way of modeling effects which operate in different strengths for the creation and the dissolution of relations. The network endowment function is zero for creation of ties, and is given by

$$g^{\text{net}}(x) = \sum_k \gamma_k s_{ik}^{\text{net}}(x) \quad (13)$$

for dissolution of ties. In this formula, the  $\gamma_k$  are the parameters for the endowment function. The potential effects  $s_{ik}^{\text{net}}(x)$  in this function, and their formulae, are the same as in the evaluation function; except that not all are available, as indicated in the preceding subsection. For further explication, consult [Snijders \(2001, 2005\)](#); (here, the ‘gratification function’ is used rather than the endowment function), [Snijders, Steglich, and Schweinberger \(2007\)](#), and [Steglich, Snijders, and Pearson \(2010\)](#).

### 12.1.4 Network rate function

The network rate function  $\lambda^{\text{net}}$  (lambda) is defined for Model Type 1 (which is the default Model Type) as a product

$$\lambda_i^{\text{net}}(\rho, \alpha, x, m) = \lambda_{i1}^{\text{net}} \lambda_{i2}^{\text{net}} \lambda_{i3}^{\text{net}}$$

of factors depending, respectively, on period  $m$ , actor covariates, and actor position (see [Snijders, 2001](#), p. 383). The corresponding factors in the rate function are the following:

1. The dependence on the period (**Rate**) can be represented by a simple factor

$$\lambda_{i1}^{\text{net}} = \rho_m^{\text{net}}$$

for  $m = 1, \dots, M - 1$ . If there are only  $M = 2$  observations, the basic rate parameter is called  $\rho^{\text{net}}$ .

2. The effect of actor covariates (**RateX**) with values  $v_{hi}$  can be represented by the factor

$$\lambda_{i2}^{\text{net}} = \exp\left(\sum_h \alpha_h v_{hi}\right).$$

3. The dependence on the position of the actor can be modeled as a function of the actor’s out-degree (**outRate**), in-degree (**inRate**), and number of reciprocated relations (**recipRate**), the ‘reciprocated degrees’. Define these by

$$x_{i+} = \sum_j x_{ij}, \quad x_{+i} = \sum_j x_{ji}, \quad x_{i(r)} = \sum_j x_{ij} x_{ji}$$

(recalling that  $x_{ii} = 0$  for all  $i$ ).



The contribution of the out-degrees to  $\lambda_{i3}^{\text{net}}$  is a factor

$$\exp(\alpha_h x_{i+}),$$

if the associated parameter is denoted  $\alpha_h$  for some  $h$ , and similarly for the contributions of the in-degrees and the reciprocated degrees.

Also an exponential dependence on reciprocals of out-degrees (**outRateInv**) can be specified; this can be meaningful because the rate effect of the out-degree becoming a value 1 higher might become smaller and smaller as the out-degree increases. Denoting again the corresponding parameter by  $\alpha_h$  (but always for different index numbers  $h$ ), this effect multiplies the factor  $\lambda_{i3}^{\text{net}}$  by

$$\exp(\alpha_h/x_{i+}) .$$

## 12.2 Behavioral evolution

The model of the dynamics of a dependent actor variable consists of a model of actors' decisions (according to *evaluation* and *endowment functions*) and a model of the timing of these decisions (according to a *rate function*), just like the model for the network dynamics. The decisions now do not concern the creation or dissolution of network ties, but whether an actor increases or decreases his score on the dependent actor variable by one, or keeps it as it is.

### 12.2.1 Behavioral evaluation function

Effects for the behavioral evaluation function  $u^{\text{beh}}$  can be selected from the following. Here the dependent variable is transformed to have an overall average value of 0; in other words,  $z$  denotes the original input variable minus the overall mean, which is given in the output file under the heading *Reading dependent actor variables*.

1. *behavioral shape effect (linear)*,  
 $s_{i1}^{\text{beh}}(x) = z_i$ ,  
where  $z_i$  denotes the value of the dependent behavior variable of actor  $i$ ;
2. *quadratic shape effect, or effect of the behavior upon itself (quad)*, where the attractiveness of further steps up the behavior 'ladder' depends on where the actor is on the ladder:  
 $s_{i2}^{\text{beh}}(x) = z_i^2$ .  
The position of this effect in the sequence of effects is different between versions 3 and 4 of SIENA.
3. *average similarity effect (avSim)*, defined by the average of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is tied,  
 $s_{i3}^{\text{beh}}(x) = x_{i+}^{-1} \sum_j x_{ij} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z)$ ;  
(and 0 if  $x_{i+} = 0$ ) ;

4. *total similarity effect* (**totSim**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is tied,  
 $s_{i4}^{\text{beh}}(x) = \sum_j x_{ij}(\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$
5. *indegree effect* (**indeg**),  
 $s_{i5}^{\text{beh}}(x) = z_i \sum_j x_{ji};$
6. *outdegree effect* (**outdeg**),  
 $s_{i6}^{\text{beh}}(x) = z_i \sum_j x_{ij};$
7. *isolate effect* (**isolate**), the differential attractiveness of the behavior for isolates,  
 $s_{i7}^{\text{beh}}(x) = z_i I\{x_{+i} = 0\},$   
 where again  $I\{A\}$  denotes the indicator function of the condition  $A$ ;
8. *average similarity  $\times$  reciprocity effect* (**avSimRecip**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is reciprocally tied,  
 $s_{i8}^{\text{beh}}(x) = x_{i(r)}^{-1} \sum_j x_{ij} x_{ji} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$   
 (and 0 if  $x_{i(r)} = 0$ ) ;
9. *total similarity  $\times$  reciprocity effect* (**totSimRecip**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is reciprocally tied,  
 $s_{i9}^{\text{beh}}(x) = \sum_j x_{ij} x_{ji} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$
10. *average similarity  $\times$  popularity alter effect* (**avSimPopAlt**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is tied, multiplied by their indegrees,  
 $s_{i10}^{\text{beh}}(x) = x_{i+}^{-1} \sum_j x_{ij} x_{+j} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$   
 (and 0 if  $x_{i+} = 0$ ) ;
11. *total similarity  $\times$  popularity alter effect* (**totSimPopAlt**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is tied, multiplied by their indegrees,  
 $s_{i11}^{\text{beh}}(x) = \sum_j x_{ij} x_{+j} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$
12. *average similarity  $\times$  reciprocity  $\times$  popularity alter effect* (**avSimRecPop**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is reciprocally tied, multiplied by their indegrees,  
 $s_{i12}^{\text{beh}}(x) = x_{i(r)}^{-1} \sum_j x_{ij} x_{ji} x_{+j} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$   
 (and 0 if  $x_{i(r)} = 0$ ) ;
13. *total similarity  $\times$  reciprocity  $\times$  popularity alter effect* (**totSimRecPop**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is reciprocally tied, multiplied by their indegrees,  
 $s_{i13}^{\text{beh}}(x) = \sum_j x_{ij} x_{ji} x_{+j} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$

14. *average alter effect* (**avAlt**), defined by the product of  $i$ 's behavior multiplied by the average behavior of his alters (a kind of ego-alter behavior covariance),  

$$s_{i14}^{\text{beh}}(x) = z_i (\sum_j x_{ij} z_j) / (\sum_j x_{ij})$$
 (and the mean behavior, i.e. 0, if the ratio is 0/0) ;
15. *average reciprocated alter effect* (**avRecAlt**), defined by the product of  $i$ 's behavior multiplied by the average behavior of his reciprocated alters,  

$$s_{i15}^{\text{beh}}(x) = z_i (\sum_j x_{ij} x_{ji} z_j) / (\sum_j x_{ij} x_{ji})$$
 (and 0 if the ratio is 0/0) ;
16. *dense triads effect* (**behDenseTriads**), defined by the number of dense triads in which actor  $i$  is located,  

$$s_{i16}^{\text{beh}}(x) = z_i \sum_{j,h} I\{x_{ij} + x_{ji} + x_{ih} + x_{hi} + x_{jh} + x_{hj} \geq c\},$$
 where  $c$  is either 5 or 6;  
*this is currently not correctly implemented in SIENA 3* ;
17. *peripheral effect*, defined by the number of dense triads to which actor  $i$  stands in a unilateral-peripheral relation,  

$$s_{i17}^{\text{beh}}(x) = z_i \sum_{j,h,k} x_{ij} (1 - x_{ji}) (1 - x_{hi}) (1 - x_{ki}) I\{x_{ij} + x_{ji} + x_{ih} + x_{hi} + x_{jh} + x_{hj} \geq c\},$$
 where  $c$  is the same constant as in the *dense triads* effect;  
 for symmetric networks, the unilateral condition is dropped, and the effect is  

$$s_{i17}^{\text{beh}}(x) = z_i \sum_{j,h,k} x_{ij} (1 - x_{hi}) (1 - x_{ki}) I\{x_{ij} + x_{ji} + x_{ih} + x_{hi} + x_{jh} + x_{hj} \geq c\};$$
*this is currently not correctly implemented in SIENA 3* ;
18. *reciprocated degree effect* (**recipDeg**),  

$$s_{i18}^{\text{beh}}(x) = z_i \sum_j x_{ij} x_{ji};$$
19. *average similarity  $\times$  popularity ego effect* (**avSimPopEgo**), defined by the sum of centered similarity scores  $\text{sim}_{ij}^z$  between  $i$  and the other actors  $j$  to whom he is tied, multiplied by ego's indegree,  

$$s_{i19}^{\text{beh}}(x) = x_{+i} x_{i+}^{-1} \sum_j x_{ij} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z);$$
 (and 0 if  $x_{i+} = 0$ ) ;  
 because of collinearity, under the Method of Moments this cannot be estimated together with the average similarity  $\times$  popularity alter effect.

### ***Covariate effects***

For each actor-dependent covariate  $v_j$  (recall that these are centered internally by SIENA) as well as for each of the other dependent behavior variables (for notational simplicity here also denoted  $v_j$ ), there are the following effects.

20. *main covariate effect* (**effFrom**),  

$$s_{i20}^{\text{beh}}(x) = z_i v_i;$$
 here too, the other dependent behavioral variables are centered so that they have overall mean 0;

21. *alter's covariate average* effect on behavior  $z$  (**AltsAvAlt**), defined as the product of  $i$ 's behavior  $z_i$  and  $i$ 's alters' covariate-average  $\check{v}_i$  as defined in (9),  
 $s_{i21}^{\text{beh}}(x) = z_i \check{v}_i$ .  
This is similar to the 'average alter' effect; for  $v_i = z_i$  it would reduce to the latter effect.

### 12.2.2 Behavioral endowment function

Also the behavioral model knows the distinction between evaluation and endowment effects. The formulae of the effects that can be included in the behavioral endowment function  $e^{\text{beh}}$  are the same as those given for the behavioral evaluation function. However, they enter calculation of the endowment function only when the actor considers decreasing his behavioral score by one unit (downward steps), not when upward steps (or no change) are considered. For more details, consult [Snijders, Steglich, and Schweinberger \(2007\)](#) and [Steglich, Snijders, and Pearson \(2010\)](#).

The statistics reported as *dec. beh.* (decrease in behavior) are the sums of the changes in actor-dependent values for only those actors who decreased in behavior. More precisely, it is

$$\sum_{m=1}^{M-1} \sum_{i=1}^n I\{z_i(t_{m+1}) < z_i(t_m)\} (s_{ik}^{\text{beh}}(x(t_{m+1})) - s_{ik}^{\text{beh}}(x(t_m))), \quad (14)$$

where  $M$  is the number of observations,  $x(t_m)$  is the observed situation at observation  $m$ , and the indicator function  $I\{A\}$  is 1 if event  $A$  is true and 0 if it is untrue.

### 12.2.3 Behavioral rate function

The behavioral rate function  $\lambda^{\text{beh}}$  consists of a constant term per period,

$$\lambda_i^{\text{beh}} = \rho_m^{\text{beh}}$$

for  $m = 1, \dots, M - 1$ .

## 13 Parameter interpretation

### 13.1 Longitudinal models

The main ‘driving force’ of the actor-oriented model is the evaluation function (in earlier publications called objective function, see [Snijders, 2001, 2005](#)) given in formula (7) (for the network) as

$$f^{\text{net}}(x) = \sum_k \beta_k^{\text{net}} s_{ik}^{\text{net}}(x) .$$

The evaluation function can be regarded as the “attractiveness” of the network (or behavior, respectively) for a given actor. For getting a feeling of what are small and large values, it is helpful to note that the evaluation functions are used to compare how attractive various different tie changes are, and for this purpose random disturbances are added to the values of the evaluation function with standard deviations equal<sup>11</sup> to 1.28.

An alternative interpretation is that when actor  $i$  is making a ‘ministep’, i.e., a single change in his outgoing ties (where no change also is an option), and  $x_a$  and  $x_b$  are two possible results of this ministep, then  $f^{\text{net}}(x_b) - f^{\text{net}}(x_a)$  is the log odds ratio for choosing between these two alternatives – so that the ratio of the probability of  $x_b$  and  $x_a$  as next states is

$$\exp(f^{\text{net}}(x_b) - f^{\text{net}}(x_a)) .$$

Note that, when the current state is  $x$ , the possibilities for  $x_a$  and  $x_b$  are  $x$  itself (no change), or  $x$  with one extra outgoing tie from  $i$ , or  $x$  with one fewer outgoing tie from  $i$ . Explanations about log odds ratios can be found in texts about logistic regression and loglinear models.

The evaluation function is a weighted sum of ‘effects’  $s_{ik}^{\text{net}}(x)$ . Their formulae can be found in Section 12.1.1. These formulae, however, are defined as a function of the whole network  $x$ , and in most cases the contribution of a single tie variable  $x_{ij}$  is just a simple component of this formula. The contribution to  $s_{ik}^{\text{net}}(x)$  of adding the tie  $i \rightarrow h$  minus the contribution of adding the tie  $i \rightarrow j$  is the log odds ratio comparing the probabilities of  $i$  sending a new tie to  $h$  versus sending the tie to  $j$ , if all other effects  $s_{ik}^{\text{net}}(x)$  yields the same values for these two hypothetical new configurations.

For example, suppose that actors  $j$  and  $h$ , actual or potential relation partners of actor  $i$ , have exactly the same network position and the same values on all variables included in the model, except that for some actor variable  $V$  for which only the popularity (alter) effect is included in the model, actor  $h$  is one unit higher than actor  $j$ :  $v_h = v_j + 1$ . It can be seen in Section 12.1.1 that the popularity (alter) effect is defined as

$$s_{ik}^{\text{net}}(x) = \sum_j x_{ij} v_j .$$

---

<sup>11</sup>More exactly, the value is  $\sqrt{\pi^2/6}$ , the standard deviation of the Gumbel distribution; see [Snijders \(2001\)](#).

The contribution to this formula made by a single tie variable, i.e., the difference made by filling in  $x_{ij} = 1$  or  $x_{ij} = 0$  in this formula, is just  $v_j$ . Let us denote the weight of the  $V$ -alter effect by  $\beta_k$ . Then, the difference between extending a tie to  $h$  or to  $j$  that follows from the  $V$ -alter effect is  $\beta_k \times (v_h - v_j) = \beta_k \times 1 = \beta_k$ .

Thus, in this situation,  $\beta_k$  is the log odds ratio of the probability that  $h$  is chosen compared to the probability that  $j$  is chosen. E.g., if  $i$  currently has a tie neither to  $j$  nor to  $h$ , and supposing that  $\beta_k = 0.3$ , the probability for  $i$  to extend a new tie to  $h$  is  $e^{0.3} = 1.35$  times as high as the probability for  $i$  to extend a new tie to  $j$ .

### 13.1.1 Ego – alter selection tables

When some variable  $V$  occurs in several effects in the model, then its effects can best be understood by considering all these effects simultaneously. For example, if in a network dynamics model the ego, alter, and similarity effects of a variable  $V$  are specified, then the formulae for their contribution to the evaluation function can be obtained from the components listed in Section 12.1.1 as

$$\beta_{\text{ego}} v_i x_{i+} + \beta_{\text{alter}} \sum_j x_{ij} v_j + \beta_{\text{sim}} \sum_j x_{ij} (\text{sim}_{ij}^v - \widehat{\text{sim}}^v), \quad (15)$$

where the similarity score is

$$\text{sim}_{ij}^v = 1 - \frac{|v_i - v_j|}{\Delta_V},$$

with  $\Delta_V = \max_{ij} |v_i - v_j|$  being the observed range of the covariate  $v$  and where  $\widehat{\text{sim}}^v$  is the mean of all similarity scores. The superscript <sup>net</sup> is left out of the notation for the parameters in order not to clutter the notation.

Similarly to how it was done above, the contribution to (15) of the tie from  $i$  to  $j$ , represented by the single tie variable  $x_{ij}$  — i.e., the difference between the values of (15) for  $x_{ij} = 1$  and  $x_{ij} = 0$  — can be calculated from this formula. It should be noted that all variables are internally centered by SIENA, and that the mean values used for the centering are given near the beginning of the input file. This is made explicit in the following by the subtraction of the mean  $\bar{v}$ . The contribution of variable  $V$  to the network evaluation function of actor  $i$  is given by

$$\begin{aligned} & \beta_{\text{ego}} (v_i - \bar{v}) + \beta_{\text{alter}} (v_j - \bar{v}) + \beta_{\text{sim}} (\text{sim}_{ij}^v - \widehat{\text{sim}}^v) \\ &= \beta_{\text{ego}} (v_i - \bar{v}) + \beta_{\text{alter}} (v_j - \bar{v}) + \beta_{\text{sim}} \left( 1 - \frac{|v_i - v_j|}{\Delta_V} - \widehat{\text{sim}}^v \right). \end{aligned} \quad (16)$$

From this equation a table can be made that gives the outcome of (16) for some values of  $v_i$  and  $v_j$ .

This can be concretely carried using the data set **s50** which is an excerpt of 50 girls in the data set used in Pearson and Michell (2000); Pearson and West (2003); Steglich et al. (2006) and Steglich et al. (2010). We refer to any of these papers for a further description of the data. The friendship network data over 3 waves are in the files **s50-network1.dat**,

s50-network2.dat, and s50-network3.dat. We also use the attribute data for alcohol use, s50-alcohol.dat, as a dependent variable. It can be seen from the SIENA output file using these data that the alcohol use variable assumes values from 1 to 5, with overall mean equal to  $\bar{v} = 3.113$ , and mean of the similarity variable  $\widehat{\text{sim}}^v = 0.6983$ . Drug use is used as a changing actor variable, with range 1–4, average  $\bar{v} = 1.5$  and average dyadic similarity  $\widehat{\text{sim}}^v = 0.7533$ .

Suppose that we fit a model of network-behavior co-evolution to this data set with for the network evolution the effects of outdegree, reciprocity, transitive ties, number of distances two, the ego, alter, and similarity effects of alcohol use, as well as the ego, alter, and similarity effects of drug use; and for the behavior (i.e., alcohol) dynamics the shape effect, the effect of alcohol on itself (quadratic shape effect), and the average similarity effect.

The results obtained are given in the following part of the output file.

#### Network Dynamics

1. rate: constant network rate (period 1)	8.2357	(	1.6225)
2. rate: constant network rate (period 2)	5.6885	(	0.8434)
3. eval: outdegree (density)	-2.1287	(	0.1565)
4. eval: reciprocity	2.3205	(	0.2132)
5. eval: transitive ties	0.2656	(	0.2025)
6. eval: number of actors at distance 2	-0.9947	(	0.2173)
7. eval: drink alter	0.0899	(	0.1184)
8. eval: drink ego	-0.0100	(	0.1087)
9. eval: drink similarity	0.8994	(	0.5864)
10. eval: drug use alter	-0.1295	(	0.1282)
11. eval: drug use ego	0.1362	(	0.1253)
12. eval: drug use similarity	0.6650	(	0.3381)

#### Behavior Dynamics

13. rate: rate drink period 1	1.3376	(	0.3708)
14. rate: rate drink period 2	1.8323	(	0.4546)
15. eval: behavior drink linear shape	0.3618	(	0.1946)
16. eval: behavior drink quadratic shape	-0.0600	(	0.1181)
17. eval: behavior drink average similarity	3.9689	(	2.2053)

We interpret here the parameter estimates for the effects of drinking behavior and drug use without being concerned with the significance, or lack thereof. For the drinking behavior, formula (16) yields

$$-0.0100(v_i - \bar{v}) + 0.0899(v_j - \bar{v}) + 0.8994\left(1 - \frac{|v_i - v_j|}{\Delta_v} - 0.6983\right).$$

In R the following code can be used to construct the selection table. Note that the function outer here is very convenient.

```
# First define a function that incorporates the relevant part
# of the evaluation function, dependent on the parameters b1, b2, b3,
# the overall average v_av, the similarity average sim_av,
# and the range ran_v
obj_n <- function(vi, vj){
```

```

        b1*(vi-v_av) + b2*(vj-v_av) + b3*(1 - abs(vi-vj)/ran_v - sim_av)
    }
# Now fill in the values of the parameter estimates and the averages.
v_av  <- 3.113
sim_av <- 0.6983
ran_v  <- 4
b1     <- -0.0100
b2     <- 0.0899
b3     <- 0.8994

# Define the value of v for which the table is to be given.
vv     <- c(1, 2, 3, 4, 5)
# And calculate the table
sel_tab <- outer(vv, vv, obj_n)
# It can be displayed
sel_tab
# and if package xtable is loaded, also be written
# to a latex or html file. For example,
tab_sel <- xtable(sel_tab)
print(tab_sel, file="tab_sel.htm", type="html",
      html.table.attributes = "rules = none")
# The html.table.attributes option gives the <table> tag
# used in the html file.

```

The results can be tabulated as follows.

$v_i \setminus v_j$	1	2	3	4	5
1	0.10	-0.03	-0.17	-0.30	-0.44
2	-0.13	0.18	0.05	-0.09	-0.22
3	-0.37	-0.05	0.26	0.13	-0.01
4	-0.60	-0.29	0.03	0.34	0.21
5	-0.84	-0.52	-0.21	0.11	0.42

This table shows the preference for similar alters: in all rows, the highest value is at the diagonal ( $v_j = v_i$ ). The ego and alter parameters are close to 0, therefore the similarity effect is dominant. However, note that the formula uses raw values for  $v_i$  and  $v_j$  but divides the values for the absolute difference  $|v_i - v_j|$  by  $\Delta_V$  which here is  $5 - 1 = 4$ . Therefore the weight of 0.09 for the alter effect is not completely negligible compared to the weight of 0.90 for the similarity effect. The positive alter effect leads to a preference for ties to alters with a high  $v_j$  value which goes against the similarity effect for  $v_i = 1$  but strengthens the similarity effect for  $v_i = 5$ . The table shows that the net resulting preference for similar others is strongest for actors (egos) high on drinking behavior, and weakest for actors in the middle and low range of drinking behavior.

For drug use, the formula yields

$$0.1362(v_i - \bar{v}) - 0.1295(v_j - \bar{v}) + 0.665\left(1 - \frac{|v_i - v_j|}{\Delta_V} - 0.7533\right),$$

which leads to the following table.



$z_i \setminus z_j$	1	2	3	4
1	0.16	-0.19	-0.54	-0.89
2	0.08	0.17	-0.18	-0.53
3	-0.01	0.08	0.17	-0.18
4	-0.10	-0.00	0.09	0.18

In each row the highest value is at the diagonal, which shows that indeed everybody prefers to be friends with similar others also with respect to drug use. The negative alter effect supports this for low  $v_i$  values and counteracts it for high  $v_i$  values. This is seen in the table in the strong preference of low drug users ( $v_i = 1$ ) for others who are low on drug use, and the very weak preference for high drug users ( $v_i = 4$ ) for others also high on drug use.

An alternative specification uses the drink ego  $\times$  drink alter interaction together with the drink squared alter effect in the network dynamics model, and similarly for drug use; for the behavior dynamics, an alternative specification uses the average alter effect. This leads to the following table of results.

#### Network Dynamics

1. rate: constant network rate (period 1)	8.0978	( 1.5118)
2. rate: constant network rate (period 2)	5.7781	( 0.9474)
3. eval: outdegree (density)	-2.1333	( 0.2196)
4. eval: reciprocity	2.3033	( 0.2184)
5. eval: transitive ties	0.2430	( 0.2059)
6. eval: number of actors at distance 2	-1.0011	( 0.2275)
7. eval: drink alter	0.1041	( 0.1348)
8. eval: drink squared alter	0.0141	( 0.1329)
9. eval: drink ego	0.0078	( 0.1157)
10. eval: drink ego x drink alter	0.1655	( 0.1095)
11. eval: drug use alter	-0.2603	( 0.2436)
12. eval: drug use squared alter	-0.0249	( 0.1945)
13. eval: drug use ego	-0.0214	( 0.1454)
14. eval: drug use ego x drug use alter	0.1976	( 0.1146)

#### Behavior Dynamics

15. rate: rate drink period 1	1.3218	( 0.3632)
16. rate: rate drink period 2	1.7884	( 0.5053)
17. eval: behavior drink linear shape	0.3820	( 0.2421)
18. eval: behavior drink quadratic shape	-0.5428	( 0.2839)
19. eval: behavior drink average alter	1.1414	( 0.6737)

For this specification, the formulae in Section 12.1.1 imply that the components in the network evaluation function corresponding to the effects of variable  $V$  are

$$\beta_{\text{ego}} (v_i - \bar{v}) x_{i+} + \beta_{\text{alter}} \sum_j x_{ij} (v_j - \bar{v}) + \beta_{\text{sq. alter}} \sum_j x_{ij} (v_j - \bar{v})^2 + \beta_{\text{exa}} \sum_j x_{ij} (v_i - \bar{v}) (v_j - \bar{v}). \quad (17)$$

The contribution of the single tie variable  $x_{ij}$  to this formula is equal to

$$\beta_{\text{ego}} (v_i - \bar{v}) + \beta_{\text{alter}} (v_j - \bar{v}) + \beta_{\text{sq. alter}} (v_j - \bar{v})^2 + \beta_{\text{exa}} (v_i - \bar{v}) (v_j - \bar{v}). \quad (18)$$

Filling in the estimates for the effects of drinking behavior yields

$$0.0078(v_i - \bar{v}) + 0.1041(v_j - \bar{v}) + 0.0141(v_j - \bar{v})^2 + 0.1655(v_i - \bar{v})(v_j - \bar{v}) .$$

This can be represented in R as follows.

```
# First define a function that incorporates the relevant part
# of the evaluation function, dependent on the parameters b1, b2, b3,
# and the overall average v_av.
# Watch out for statements that take more than one line,
# as used here in the definition of the functions obj_n.
# The rule is that always, the lines before the last
# must be syntactically incomplete.
# In this case, this is satisfied because the first line ends with a +
obj_n <- function(vi, vj){
  b1*(vi-v_av) + b2*(vj-v_av) + b3*(vi-v_av)*(vi-v_av) +
  b4*(vi-v_av)*(vj-v_av)
}
# Now fill in the values of the parameter estimates and the averages.
v_av <- 3.113
b1 <- 0.0078
b2 <- 0.1041
b3 <- 0.0141
b4 <- 0.1655
# Define the value of v for which the table is to be given.
vv <- c(1, 2, 3, 4, 5)
# And calculate and display the table
sel_tab <- outer(vv, vv, obj_n)
sel_tab
```

This gives the following<sup>12</sup> table.

$v_i \setminus v_j$	1	2	3	4	5
1	0.57	0.32	0.07	-0.17	-0.42
2	0.18	0.10	0.02	-0.06	-0.14
3	-0.18	-0.10	-0.01	0.08	0.16
4	-0.51	-0.26	-0.01	0.24	0.49
5	-0.81	-0.40	-0.02	0.43	0.85

For drug use we obtain the formula

$$-0.0214(v_i - \bar{v}) - 0.2603(v_j - \bar{v}) - 0.0249(v_j - \bar{v})^2 + 0.1976(v_i - \bar{v})(v_j - \bar{v}) .$$

and the following table.

$v_i \setminus v_j$	1	2	3	4
1	0.18	-0.18	-0.53	-0.89
2	0.06	-0.10	-0.26	-0.42
3	-0.11	-0.07	-0.03	0.00
4	-0.33	0.09	0.14	0.38

<sup>12</sup>In earlier versions of the manual, there were some differences in this and the following tables, because too much rounding was used at an early stage.

The fact that we are using three variables involving alter (alter, alter squared, interaction) instead of two (alter and similarity) leads to greater freedom in the curve that is fitted: the top (or, in the rare case of a reversed pattern, bottom) of the attractiveness of alters is not necessarily obtained at the diagonal, i.e., at ego's value. Straightforward calculus shows us that (18) is a quadratic function and obtains its extreme value (a maximum if  $\beta_{\text{sq. alter}}$  is negative, a minimum if it is positive – the latter is, in general, less likely) for

$$v_j = \bar{v} - \frac{\beta_{\text{alter}} + \beta_{\text{e} \times \text{a}}(v_i - \bar{v})}{2\beta_{\text{sq. alter}}} . \quad (19)$$

If the effect  $\beta_{\text{sq. alter}}$  of the squared alter's value is negative and the interaction effect  $\beta_{\text{e} \times \text{a}}$  is positive, then this location of the maximum increases with ego's own value,  $v_i$ . Of course the number given by (19) will usually not be an integer number, so the actual value of  $v_j$  for which attractiveness is maximized is the integer in the range of  $V$  closest to (19).

For drinking there is a weak positive effect of squared drinking alter; the effect of squared drug use alter is weak negative. For drinking we see that the most attractive value for egos with  $v_i = 1$  or 2 is no drinking,  $v_j = 1$ , whereas for egos with  $v_i \geq 3$  the most attractive alters are those who drink most,  $v_j = 5$ . We also see that egos with the highest drinking behavior are those who differentiate most strongly depending on the drinking behavior of their potential friends.

For drug use the situation is different. Actors with  $v_i = 1$  or 2 prefer friends with drug use  $v_j = 1$ ; for actors with  $v_i = 3$  the difference is hardly discernible, but if we consider the differences even though they are tiny, then they are most attracted to others with  $v_j = 2$ ; actors with the highest drug use ( $v_i = 4$ ) differentiate most strongly, and are attracted most to others with also the highest drug use.

The differences between the results with the similarity effects and the interaction effects are minor. The extra degrees of freedom of the latter model gives a slightly closer fit to the data. However, the differences between the two fits are not significant, as can be shown e.g. by score-type tests.

### 13.1.2 Ego – alter influence tables

In quite a similar way as in the preceding section, from the output tables and the formulae for the effects we can construct tables indicating how attractive various different values of the behavior are, depending on the behavior of the actor's friends.

In the first model, the estimated coefficients in the behavior evaluation function are as follows.

15. eval:	behavior drink linear shape	0.3618	(	0.1946)
16. eval:	behavior drink quadratic shape	-0.0600	(	0.1181)
17. eval:	behavior drink average similarity	3.9689	(	2.2053)

The dependent behavior variable now is indicated  $Z$ . (In the preceding section the letter  $V$  was used, but this referred to any actor variable predicting network dynamics,

whether it was also a dependent variable or not.) The formulae in Section 12.2.1 show that the evaluation function for this model specification is

$$u^{\text{beh}} = \beta_{\text{trend}}(z_i - \bar{z}) + \beta_{\text{drink}}(z_i - \bar{z})^2 + \beta_{\text{av. sim}} \frac{1}{x_{i+}} \sum_j x_{ij} (\text{sim}_{ij}^z - \widehat{\text{sim}}^z) . \quad (20)$$

In the second model, the table gave the following results.

17. eval:	behavior drink linear shape	0.3820	(	0.2421)
18. eval:	behavior drink quadratic shape	-0.5428	(	0.2839)
19. eval:	behavior drink average alter	1.1414	(	0.6737)

Here the evaluation function is

$$u^{\text{beh}} = \beta_{\text{trend}}(z_i - \bar{z}) + \beta_{\text{drink}}(z_i - \bar{z})^2 + \beta_{\text{av. alter}}(z_i - \bar{z})(\bar{z}_{(i)} - \bar{z}) , \quad (21)$$

where  $\bar{z}_{(i)}$  is the average  $Z$  value of  $i$ 's friends<sup>13</sup>,

$$\bar{z}_{(i)} = \frac{1}{x_{i+}} \sum_j x_{ij} z_j .$$

Equation (21) is simpler than equation (20), because (21) is a quadratic function of  $z_i$ , with coefficients depending on the  $Z$  values of  $i$ 's friends as a function of their average, whereas (20) depends on the entire distribution of the  $Z$  values of  $i$ 's friends.

Suppose that, in model (20), the similarity coefficient  $\beta_{\text{av. sim}}$  is positive, and compare two focal actors,  $i_1$  all of whose friends have  $z_j = 3$  and  $i_2$  who has four friends, two of whom with  $z_j = 2$  and the other two with  $z_j = 4$ . Both actors are then drawn toward the preferred value of 3; but the difference between drinking behavior 3 on one hand and 2 and 4 on the other hand will be larger for  $i_1$  than for  $i_2$ . In model (21), on the other hand, since the average is the same, both actors would be drawn equally strongly toward the average value 3.

For model (20), consider actors in the extreme situation that all their friends have the same behavior  $z_{ij}$ . For the parameters given above, the behavior evaluation function then reads

$$u^{\text{beh}} = 0.3618(z_i - \bar{z}) - 0.06(z_i - \bar{z})^2 + 3.9689(\text{sim}_{ij}^z - \widehat{\text{sim}}^z) .$$

This can be calculated by R as follows.

```
# Define part of evaluation function
obj_b <- function(vi, vj){
  b1*(vi-v_av) + b2*(vi-v_av)^2 + b3*(1 - abs(vi-vj)/ran_v - sim_av)
}
# Fill in the values of the parameter estimates and the averages.
v_av <- 3.113
sim_av <- 0.6983
b1 <- 0.3618
```

---

<sup>13</sup>If  $i$  has no friends, i.e.,  $x_{i+} = 0$ , then  $\bar{z}_{(i)}$  is defined to be equal to  $\bar{z}$ .

```

b2      <- -0.06
b3      <- 3.9689
vv      <- c(1, 2, 3, 4, 5)
# The table is transposed: vi in the columns!
t(outer(vv, vv, obj_b))

```

The result is the following<sup>14</sup>.

$\bar{z}_{(i)} \setminus z_i$	1	2	3	4	5
1	0.17	-0.27	-0.83	-1.51	-2.30
2	-0.83	0.72	0.16	-0.51	-1.31
3	-1.82	-0.27	1.16	0.48	-0.32
4	-2.81	-1.26	0.16	1.47	0.67
5	-3.80	-2.26	-0.83	0.48	1.67

For the other model, filling in the estimated parameters in (21) yields

$$u^{\text{beh}} = 0.3820 (z_i - \bar{z}) - 0.5428 (z_i - \bar{z})^2 + 1.1414 (z_i - \bar{z})(\bar{z}_{(i)} - \bar{z}) .$$

For a given average  $Z$  values of  $i$ 's friends, this is a quadratic function of  $z_i$ . The following table indicates the behavior evaluation function for  $z_i$  (columns) as a function of the average drinking behavior of  $i$ 's friends (rows).

$\bar{z}_{(i)} \setminus z_i$	1	2	3	4	5
1	1.87	1.59	0.22	-2.23	-5.76
2	-0.55	0.32	0.09	-1.22	-3.61
3	-2.96	-0.95	-0.04	-0.20	-1.46
4	-5.37	-2.22	-0.16	0.81	0.70
5	-7.78	-3.49	-0.29	1.82	2.85

We see that, even though the squared function does not necessarily draw the actors toward the average of their friends' behavior, for these parameters the highest values of the behavior evaluation function are obtained indeed when the focal actor ( $i$ ) behaves just like the average of his friends. It should be noted that no between-ego comparisons are made, so comparisons are meaningful only within rows. The values far away from the maximum contrast in this case more strongly than in the case of the model with the average similarity effect, but these differences here are not significant.

Another way to look at the behavior evaluation function is to consider the location of its maximum. This function here can be written also as

$$u^{\text{beh}} = (0.382 + 1.1414(\bar{z}_{(i)} - \bar{z})) (z_i - \bar{z}) - 0.5428 (z_i - \bar{z})^2 .$$

Differentiating with respect to  $z_i$  shows that this function is maximal for

$$z_i = \bar{z} + \frac{0.382 + 1.1414(\bar{z}_{(i)} - \bar{z})}{2 \times 0.5428} = 0.19 + 1.05 \bar{z}_{(i)} ,$$

just a little bit larger than  $\bar{z}_{(i)}$ . Indeed in the table we see that, for the rounder integer values 1, 2, 3, 4, 5 of  $\bar{z}_{(i)}$ , the highest values are obtained exactly for  $z_i = \bar{z}_{(i)}$ .

<sup>14</sup>There were errors in this table in an earlier version of the manual.

## Part III

# Programmers' manual

## 14 Get the source code

To do something with the source code, first you must get access to it. In the first place, it is good to know that for any R function that can be called, the source code is listed by writing the function name. Thus, if `RSiena` is loaded, the command

```
sienaModelCreate
```

will list the code for the function with this name.

To get insight into a package, and certainly to modify or personalize it, it is necessary, however, to get the source code of the whole package. This can be done by downloading, from CRAN or R-Forge, the ‘tarball’ with extension `.tar.gz`. This file can be extracted by compression/decompression programs (perhaps you need to do a double extraction). If you do not succeed in extracting the tar ball, see below for the use of `RTools` for this purpose. This will lead to a directory structure where at some place there is a directory called `RSiena` and/or a directory called `RSienaTest`, which includes the source code of the package.

## 15 Other tools you need

**Windows** 1. Download and install the appropriate (version number depending on which R you are using) `Rtools.exe` from <http://www.murdoch-sutherland.com/Rtools/>.

2. Make sure you check the box to amend your path during installation.
3. Beware: if you later install other programs containing utilities such as `tar` (`delphi` is one offender), you may need to uninstall and reinstall `Rtools`, as you need `Rtools` at the start of your path.
4. Add the path-to-the file `R.exe` to your path. Right-click on My Computer icon, select Properties/Advanced/Environment variables...  
Restart your computer to put the new path into effect.

**Mac** 1. Make sure the Xcode tools are installed.  
2. Add the path-to-the-file `R.exe` to your path.

**linux** Add the path-to-the-file `R.exe` to your path.

## 16 Building, installing and checking the package

In a command prompt or terminal window, navigate to the directory immediately above the `siena` source tree. Here we assume the source tree is in a directory called `RSiena`. (You

may have minor difficulties if it is not the same as the name of the package you are trying to build or install: you can do all these things with `RSienaTest` also.)

For Windows computers, the following ‘type’ instructions are Dos commands. A convenient way to apply them are by including them in a batch file (extension name `.bat`) followed by a name with `pause` so that the Dos window – that will contain the error messages if there are any – will still be there when all is over.

**Install** Installing will recreate the binary and install in your normal R library path. Type  
`R CMD INSTALL RSiena`

**Build** Building will create a tar ball. Type

`R CMD build RSiena`

This may give warning messages about the line endings if you run it on Windows. Do not worry, unless you have created any new source files, when it might remind you to set the property of `eol-style` on them when you add them to the repository.

**Check** Checking is a process designed to ensure that packages are likely to work correctly when installed. Type

`R CMD check RSiena_1.0.n.tar.gz`

(where `n` is adjusted to match the tar ball name.)

**zip file** To make a zip file that can be used in Windows for ‘installing from a local zip file’, and therefore is easy for distribution to others, type

`R CMD INSTALL --build RSiena_1.0.n.tar.gz`

(where again `n` is adjusted to match the tar ball name.)

If you make a change you need to `INSTALL` the new version in order to test it, and before you commit any changes to a repository you should `check` your new version. Make sure you get *no* warnings or errors from the check.

You can also `INSTALL` from a tar ball, and `check` a source tree.

If you have permission problems on Linux or Mac, you may need to do the first install from within R, so that the necessary personal library directories will be created. Use `install.packages(tarballname, repos=NULL)` after creating a tar ball. (Or possibly just try to install some other package within R which will create the directories for you.)

You can unpack a tar ball by using

`tar xf tar-ball-name`

## 17 Adding an effect

Effects can be added to your personalized version of `RSiena`. If you think the effect could be useful for others, too, it will be appreciated if you propose it for inclusion through one of the discussion lists or directly to the maintainer of the package. This section gives the outline of the procedure, and then presents an elaborate example.

1. Work out the definition of the effect and the contribution or change statistic. For network effects, the change statistic is

$$\Delta_{kij}(x) = s_{ki}(x^{+ij}) - s_{ki}(x^{-ij}) \quad (22)$$

where  $x^{+ij}$  is the network with the tie  $i \rightarrow j$  and  $x^{-ij}$  is the network without this tie.

Determine an existing effect that is most similar to this effect (or perhaps more than one).

2. Open the file `allEffects.csv` located in "`RSiena\data`"
  - Identify the effect group (e.g. `nonSymmetricObjective`, `bipartiteSymmetricObjective`) where this effect belongs. The names of the groups should be self-explanatory.
  - Insert a new row in that group. Copy a row that corresponds best to your new effect and modify `effectName`, `functionName`, `shortName`, and more if this seems necessary. Assume our new effect has shortName *newEf*.  
In some cases, the new function will have extra parameters, as you can see from other examples; this is mostly the case, if one function is being used to define more than one effect.  
For how to deal with internal effect parameters, look up a function defining an effect that has such a parameter.
  - Build the package and install it. Check from R that the new effect (which has only been created nominally) appears now in the effects object in RSiena.
3. Open the folder "`RSiena/src/model/effects`". In an editor open the files `AllEffects.h` and `EffectFactory.cpp`.

These are C++ files; using a C++ editor is convenient but not necessary. Note however that you must save the files as ASCII (raw text) files without changing their names. Let us use the name *NewEffect* as the function name to be used (replace this by whatever is appropriate).

- In the file `AllEffects.h` you need to add the line  
`#include "NewEffect.h"`  
where it is alphabetically appropriate.
- In the file `EffectFactory.cpp`, at the appropriate place, add the lines

```
else if (effectName == "newEf")
{
pEffect = new NewEffect(pEffectInfo);
}
```



- Now you will need to create two files (namely header and source files for C++) that should be called `NewEffect.h` and `NewEffect.cpp`. If there is a similar effect to the one you want to add it is usually easier to use it as a template.

We recommend opening any effect file to see how the syntax works, but creating a new effect will be hard without knowing at least a bit of C++.

4. Once you are done editing you should build the package again and install it (from the command prompt) and then go to R to see if it is available to you.

It is a good idea to check the target statistics computed for a simple two-wave data set such as `s50`.

As examples, start with simple effects. For example, a network effect depending on a nonlinear transformation of outdegree, or a behavior effect depending nonlinearly on the behavior and nothing else. After having obtained experience with such a simple effect, continue with the effect that you are interested in.

### 17.1 Example: adding the truncated out-degree effect

As an example, we show how the truncated out-degree effect (short name `outTrunc`) was added. It is defined by

$$s_i^{\text{net}}(x) = \min(x_{i+}, c) \quad (23)$$

where  $c$  is an **internal effect parameter**.

1. The change statistic (22) is

$$\Delta_{ij}(x) = \begin{cases} 1 & \text{if } \{x_{i+} < c, x_{ij} = 0\} \text{ or } \{x_{i+} \leq c, x_{ij} = 1\} \\ 0 & \text{else.} \end{cases} \quad (24)$$

Note that for this effect the case for going up ( $x_{ij} = 0$ ) must be distinguished from the case for going down ( $x_{ij} = 1$ ).

2. In the file `allEffects.csv` the name of the effect group `nonSymmetricObjective` seems to cover the type of effect we are considering, and also contains other effects such as out-degree activity which are very similar to this effect.

The row for the out-degree activity (`sqrt`) effect was copied and inserted below this row. The “effectName” was changed to `outdegree-trunc(#)`, the “functionName” to `Sum of outdegrees trunc(#)`, and the “shortname” to `outTrunc`. The hash sign (#) in these names will be replaced by the value of the internal effect parameter in the written output. The “parm” column, which defines the default value of the internal effect parameter, was set to 5.

The package was built. Loading it in R and creating an `RSiena` data set showed that indeed the effect was there.

3. The name `OutTruncEffect` was chosen for the new function.  
In the file `AllEffects.h` the line

```
#include "OutTruncEffect.h"
```

was included at the appropriate alphabetic place.

In the file `EffectFactory.cpp`, after the piece referring to `effectName == "outActSqrt"`, the lines

```
else if (effectName == "outTrunc")
{
    pEffect = new OutTruncEffect(pEffectInfo);
}
```

were inserted. This refers the program, when it encounters short name `outTrunc`, to the function `OutTruncEffect`. The next step was to construct this function.

4. To choose a template for `OutTruncEffect`, we could make various different choices; here it is important to have a look at the various effects defined in Section 12 that depend only on the outdegree. Consider the effects Outdegree activity - sqrt (short name `outActSqrt`) and sum of  $(1/(\text{out-degree} + c))$  (short name `outInv`) as possible examples. A look in `EffectFactory.cpp` shows that these are implemented using the functions `OutdegreeActivitySqrtEffect` and `InverseOutdegreeEffect`, respectively. Therefore look at the files `OutdegreeActivitySqrtEffect.cpp` and `InverseOutdegreeEffect.cpp` where these functions are defined. The former defines the effect through a ‘calculateContribution’ function, which defines the tie flip contribution (the function called  $\Delta_{ij}(x)$  above) and `tieStatistic`, which is the function  $r_{ij}(x)$  when the effect can be defined as

$$s_i^{\text{net}}(x) = \sum_j x_{ij} r_{ij}(x) . \quad (25)$$

The latter defines the effect through a `calculateContribution` function and an `egoStatistic` function, which is the effect as defined in (23).

Since our new effect cannot be expressed in a straightforward way by an equation of the type (25), we chose to use the files `InverseOutdegreeEffect.h` and `InverseOutdegreeEffect.cpp` as templates. This has a second advantage: the `outInv` effect has an `effect parameter`, which we also need to represent the parameter  $c$  in (23).

As a first step, the files `InverseOutdegreeEffect.h` and `InverseOutdegreeEffect.cpp` were saved under the new names `OutTruncEffect.h` and `OutTruncEffect.cpp`.

For the header file `OutTruncEffect.h`, all strings ‘inverseoutdegreeeffect’ were changed into ‘outtrunceffect’ while retaining the original use of upper and lower case. The explanation also was adapted. The header file now implies that for the function `OutTruncEffect` functions are needed of the types `calculateContribution`, `endowmentStatistic` and `egoStatistic`.

This was implemented in the file `OutTruncEffect.cpp`, which just was created by renaming `InverseOutdegreeEffect.cpp`. First all strings ‘outdegreeactivitysqrteffect’ were changed into ‘outtrunceffect’, again retaining the original use of upper and lower case.

To understand the C++ syntax, keep into account the object-oriented nature of C++. The keyword `this` is a pointer referring to the object in which the current function is defined, and the arrow `->` indicates a further pointer; thus, the variable `this->pNetwork()->outDegree(this->ego())`

refers to the outdegree of ego (denoted in our mathematical formulae by  $i$ ) in the current network – in other words,  $x_{i+}$ .

The variable `this->lc` refers to the internal effect parameter, denoted in our formulae by  $c$ . The `return` statement defines the function value that is returned when the function is called.

Armed with this knowledge, we specified the change statistic, implementing (24), as follows.

```
double OutTruncEffect::calculateContribution(int alter) const
{
    double change = 0;
    // Current out-degree
    int d = this->pNetwork()->outDegree(this->ego());
    if (this->outTieExists(alter))
    {
        // After a tie withdrawal, the new out-degree would be d-1, and
        // the new effect value would have decreased by 1 if d <= this->lc
        if (d <= this->lc)
            {change = 1;}
    }
    else
    {
        // When introducing a new tie, the new out-degree would be d+1, and
        // the new effect value would have increased by 1 if d < this->lc
        if (d < this->lc)
            {change = 1;}
    }
    return change;
}
```

The effect statistic, implementing (24), was specified as follows.

```
double OutTruncEffect::egoStatistic(int ego,
const Network * pNetwork)
{
    // Current out-degree
    int d = this->pNetwork()->outDegree(this->ego());
    if (d <= this->lc)
        {return d;}
}
```

```

    else
      {return this->lc;}
  }

```

5. Having done this, the package was built and installed again. (To be honest, there first were some errors; but the error messages from the compiler are quite clear and easily led to solving the errors.)

Upon starting R and loading RSiena, indeed the new effect was available. For an easy check, the following commands were used.

```

mynet    <- sienaNet(array(c(s501, s502), dim=c(50, 50, 2)))
mydata   <- sienaDataCreate(mynet)
mymodel  <- sienaModelCreate(projname="s50_12")
myeff    <- getEffects(mydata)
myeff    <- setEffect(myeff, outTrunc, parameter = 3)
ans      <- siena07(mymodel, data=mydata, effects=myeff)
summary(ans)

```

The parameter was set at 3, because the maxima of the observed out-degrees in the two data sets `s501` as well as `502` were 5, so the ‘outdegree-trunc(`#`)’ effect would be highly collinear with the outdegree effect if the default parameter of 5 were used. This led to good convergence. To check the calculation of the statistics, it was noted that the output file mentioned the target values

Observed values of target statistics are

1. Number of ties	116.0000
2. Number of reciprocated ties	70.0000
3. Sum of outdegrees trunc(3)	105.0000

The value of the target statistic for the new effect should be

$$\sum_i s_i^{\text{net}}(x(t_2)) = \sum_i \min(x_{i+}(t_2), 3) .$$

This can be directly calculated in R by requesting

```
sum(pmin(rowSums(s502),3))
```

which indeed returns the value 105, confirming that the calculation of the ego statistic seems correct.

6. To complete the extension of the package by this effect, it also was added to the set of effects for symmetric and bipartite networks. This was done by inserting, at appropriate places in the file `allEffects.csv`, the same line but now with `effectGroup` changed to `bipartiteObjective` and `symmetricObjective`, respectively.

## A List of Functions in Order of Execution

This appendix provides a description of the functions that constitute the `RSiena` package. This is intended as a quick reference or catalogue for the user to employ Stochastic Actor Oriented Models (SAOM) to analyze network dynamics in R.

The functions are presented in execution order (more or less as they would be used in practice). A list of useful R functions to read and prepare the data set is also included at the beginning. In all cases examples on how to use these functions are provided. In the ‘syntax’ column, when arguments of functions are followed by `=` and a single option, this is the default option.

The descriptions provided are suitable for beginner and intermediate R and Siena users. For the advanced specifications of the functions the user should refer to the help by typing “`?funName`” in the R console, where “`funName`” is the name of the function.

We consider that the model estimation is composed by 6 stages:

1. Getting started
2. Get the data the right format or check that it is in the correct format
3. Data specification
4. Model specification
5. Model estimation
6. Working with the results

Tables 1 and 2 present the list of useful R functions and the list of `RSiena` functions in execution order, respectively.

Stage	Name	Syntax	Examples	Description
1	help*	help(funame)	help(siena01Gui)	Opens the help on the function named "funame"; this can also be done by typing "?" followed by "funame" in the console. This is the general way to get information about further options of this function.
1	getwd	getwd()		Returns the name of the current working directory. Does not require arguments
1	list.files	list.files(dir)	list.files ("C:/User/MyDocuments/MySiena")	Returns a character vector with the names of the files in the directory "dir". If no argument is provided, "dir" is the current working directory.
1	setwd*	setwd(dir)	setwd("C:/MyDocuments/MySiena")	Sets the working directory to "dir". In this context the working directory should be where the data is saved
1	install.packages*	install.packages()		It is used to install packages. If no arguments are provided it opens a GUI to select a mirror site and the packages that we want to download and install. This is not necessary if the package has already been installed.
1	library*	library(package)	library(RSiena)	Loads the library named "package".
1	read.table	read.table(file, header=FALSE, sep="," , quote="\" ,...)	net1 <- read.table('network1.dat', header=F)	Reads a file in table format and creates a data frame from it. The argument "file" is the file containing the data. In the case of adjacency matrices, the file should have the same number of columns and rows. "header" is a logical argument indicating whether the first row of the data contains the column names. "sep" is the field separator character (such as space, comma, etc.). See the help on the function to specify other arguments
2	as.matrix	as.matrix(x,...)	net1 <- as.matrix(net1)	Transforms an object "x" into a matrix. Siena works with matrices and not with data frames
2	class	class(x)	class(net1)	Returns the type of object that "x" is
2	dim	dim(x)	dim(net1)	Returns the dimension of object "x"
4	fix*	fix(x)	fix(effects)	Allows editing the object "x" by opening a window and it replaces the old object by the edited "x"

Table 1: Useful functions from R in execution order

\* Also available via a menu option

Table 2: List of RSiena Functions in order of Execution

Stage	Name	Syntax	Examples	Description
1	installGui	installGui()		Starts the installer for the standalone version of RSiena. Only for Windows. Does not require arguments
3 – 5	siena01Gui	siena01Gui()		Does not require arguments. Opens a GUI to be used to run the model estimation or to create a session from which to work within R. Details on how to run the estimation under the GUI can be found in section 2.2.3 and 2.2.4.
3	sienaNodeSet	sienaNodeSet (n, nodeSetName= "Actors", names=NULL)		Creates a Siena node set which can be used as the nodes in a Siena network. "n" is the number of actors or nodes; "nodeSetName" is a character string to name the node set (defaults to "Actors") and "names" is a string vector with length n with the names of each node (optional)
3	sienaNet	sienaNet (netarray, type= c("oneMode", "bipartite", "behavior"), nodeSet="Actors", sparse=is.list (netarray))	sienaNet(array( c(net1,net2,net3), dim=c(dim(net1),3)))	Creates a Siena network object by forming an array of network observations represented as matrices, arrays or sparse matrices. "netarray" is a matrix (type= "behavior" only) or array of values or list of sparse matrices of type "dgfMatrix"; "type" is either "one mode" (default), "bipartite" or "behaviour"; "nodeSet" is the name of the node set. It is a vector with two strings for a bipartite network; "sparse" is logical and it is set to TRUE if the data is in sparse matrix format, FALSE otherwise
3	coCovar	coCovar(val, nodeSet ='Actors')	cons <- as.matrix( read.table ( 'cons.DAT' ) ) cons1 <- coCovar (cons[,1])	Creates a constant covariate object, where val is the vector of covariate values and nodeSet is the name of the actors' set. The dimension of val should be (1, # Actors)
3	varCovar	varCovar(val, nodeSet ='Actors')	chan <- as.matrix (read.table ('chan.DAT')) chan <- varCovar (chan[,1])	Creates a changing covariate object where "val" is a matrix with the covariate values with one row for each actor and one column for each period; "nodeSet" is the name of the set of actors
Continued...				

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
3	coDyadCovar	coDyadCovar(val, nodeSets= c("Actors", "Actors"))		Creates a constant dyadic covariate object where "val" is a matrix of the same dimension as the network observations and nodeSets are the sets of actors with which the constant covariate is associated
3	varDyadCovar	varDyadCovar(val, nodeSets= c("Actors", "Actors"))		Creates a changing dyadic covariate object where "val" is an array of matrices. Each matrix has the same dimension of the actor set and "val" has one less matrices than observations of the network; "nodeSets" are the sets of actors to which the varying covariate object is associated
3	sienaCompositionChange	sienaCompositionChange( changelist, nodeSet="Actors", option=1)		Creates a list of events describing the moments in which each actor is present in the network: "changelist" is a list with an entry for each actor in the node set. Each entry is a vector indicating intervals in which an actor is present in the network. "nodeSet" is the name of the set of actors corresponding to these composition changes and "option" (defaults to 1) is an integer controlling the processing of the network entries for the actors not currently present. See help(sienaCompositionChange) for details on this
3	sienaCompositionChangeFromFile	sienaCompositionChangeFromFile ( filename, nodeSet="Actors", fileobj=NULL, option=1)		Creates a list of events describing the changes over time in the actor set from a file. "filename" is the name of the file containing change information (one line per actor) each line is a series of space delimited numbers indicating intervals. "fileobj" is the result of readLines on "filename". "nodeSet" is the name of the set of actors. "option" (defaults to 1) has the same description that in sienaCompositionChange
Continued...				



Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
3	sienaDataCreate	sienaDataCreate(..., nodeSets=NULL, getDocumentation=FALSE)	MyData <- sienaDataCreate (net, cons1, cons2, cons3, chan, dyad)	Creates a siena object from networks, covariates, composition and behaviour objects: “...” represents the objects of class “sienaNet”, “coCovar”, “varCovar”, “coDyadCovar”, “varDyadCovar”, “compositionChange”. “nodeSets” is a list of Siena node sets. Default is a single set named “Actors” with length equal to the number of rows in the first object of class “SienaNet”, it has to match the nodeSet supplied when the arguments are created; “getDocumentation” is a flag to allow documentation for internal functions, not for use by users
3	sienaDataCreateFromSession	sienaDataCreateFromSession( filename=NULL, session=NULL, modelName=“Siena”, ...)	myobj <- sienaDataCreateFromSession( (‘Session.csv’)	Reads a SIENA session from a file and creates a Siena Data input session if the function is called from siena01Gui(); “modelName” is the project’s name; “...” refers to other arguments used by siena01Gui()
3	sienaGroupCreate	sienaGroupCreate (objlist, singleOK=FALSE, getDocumentation=FALSE)	sienaGroupCreate (list( MyData1, MyData2))	Creates an object of class “sienaGroup” from a list of Siena data objects: “objlist” is a list of objects of class “siena”; “singleOK” is a boolean variable to indicate if it is OK to have just one object; “getDocumentation” is a flag to allow documentation of internal functions, not for use by users
4	effectsDocumentation	effectsDocumentation()		Prints a html or L <sup>A</sup> T <sub>E</sub> X table with the effects details
4	getEffects	getEffects(x, nintn=10, behNintn=4, getDocumentation=FALSE)	MyEff <- getEffects ( MyData, nint=2, behNint=1)	Creates a siena effects objects (a data frame) that contains a list of the effects that can be included in the model. Type fix(MyEff) to edit the effects through a GUI (e.g. Including them or excluding them, changing their names, initial values, fixing them, etc.) The arguments are a siena or a siena group object “x”, the number of lines for user defined network interactions “nint” and the number of lines for user defined behaviour interactions “behNintn”. “getDocumentation” is a flag to allow documentation for internal functions, not to be used by users
Continued...				

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
4	includeEffects	includeEffects(myeff, ..., include=TRUE, name=myeff\$name[1], type="eval", interaction1="", interaction2="")	MyEff<- includeEffects(MyEff, transTrip, balance)  MyEff<- includeEffects(MyEff, sameX, sameXRecip, interaction1="gender")	The function is a way to select the effects to be included. "myeff" is an effects object, as created by getEffects. It is necessary to indicate the short names to identify the effects to be included (argument ...). Use myeff\$shortName to get a list of the short names of possible effects to include and myeff\$effectName to get the full name of the effects. This information can also be found in the documentation created by effectsDocumentation(). The "include=TRUE" indicates that we want to include the "." effects in the model, it can be set to FALSE to exclude effects from the model. "name" is the name of the network for which effects are being included. "type" is to include "eval" (evaluation function effects) or "endow" (endowment function effects). "interaction1" and "interaction2" are names of siena objects (where needed) to completely identify the effects e.g. covariate name or behavior variable name. Use myeff\$effectName[myeff\$include] to get the names of the included effects. It returns a new effects object, so it is important to assign it to a name
Continued...				

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
4	includeInteraction	includeInteraction(myeff, ..., include=TRUE, name=myeff\$name[1], type = "eval", interaction1=rep("", 3), interaction2=rep("", 3))	MyEff <- includeInteraction( Eff, transTrip, egoX, interaction1 = c("", "beh"))	This function provides an interface to allow easy update of an unspecified interaction row in a Siena effects object. "myeff" is a Siena effects object as created by getEffects. To specify the effects to interact, list their short names instead of "..."; "include" is a boolean variable, default TRUE to include the interaction, it can be switched to FALSE to turn off an interaction. "name" is the name of network for which interactions are being defined. Defaults to the first in the effects object. "type" is the type of effects to be interacted: currently only "eval" or "endow". "interaction1" is a vector of siena objects where needed to completely identify the effect e.g. covariate name or behavior variable name. Trailing blanks may be omitted. "interaction2" is a vector of siena objects where needed to completely identify the effect e.g. covariate name or behavior variable name. Trailing blanks may be omitted.
4	setEffect	setEffect(myeff, shortName, parameter=0, fix=FALSE, test=FALSE, initialValue=0, include=TRUE, name=myeff\$name[1], type= "eval", interaction1 = "", interaction2 = "")	MyEff <- setEffect(MyEff, transTrip, initialValue=3, include=T)	Interface to change the attributes of a particular effect. The required arguments are an effect object ("myeff"), the short name of the effect to modify ("shortName") and a required integer value that defaults to zero ("parameter"). Depending on what it is desired to be modified we can supply: "fix=TRUE", if we wish to fix that parameter; "test = TRUE" if we wish to test that parameter; "initialValue=2" (or any desired number) to modify the effect's initial value (Defaults to zero); "include=TRUE or FALSE" depending on whether we want to include/exclude the effect (defaults to TRUE). The arguments "name", "type" and "interaction1" and "interaction2" are defined as in includeInteraction and includeEffects.
Continued...				

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
5	print01Report	print01Report(data, myeff, modelname="Siena", session=NULL, getDocumentation=FALSE)	print01Report(MyData, MyEff)	Prints a report of a Siena data object and its default effects. We need to supply a Siena data object ("data") a siena effects object ("myeff") and a model name ("modelname") that defaults to "Siena". It creates and saves a file named "modelname.out" (Siena.out) that contains preliminary information on the data.
Continued...				

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
5	sienaModelCreate	sienaModelCreate( fn=simstats0c, projname="Siena", MaxDegree=0, useStdInits=FALSE, n3=1000, nsub=4, maxlike=FALSE, diag=!maxlike, condvarno=0, condname="", firstg=0.2, cond=NA, findiff=FALSE, seed=NULL)	MyModel model.create (projname = "MyProject")	Creates a siena model object that can be used to call siena07. "fn" is function to do one simulation in the Robbins-Monro algorithm. "projname" is character string name of project. No embedded spaces. "MaxDegree" is a named vector of maximum degree values for corresponding networks. "useStdInits" is a boolean variable, if TRUE, the initial values in the effects object will be ignored and default values used instead. "n3" is the number of iterations in phase 3 (defaults to 1000). "nsub" is the number of subphases in phase 2 (defaults to 4). "maxlike", boolean to indicate whether to use maximum likelihood method or straightforward simulation (defaults to false). "diag" is boolean to indicate if the complete estimated derivative matrix should be used; "condvarno", if conditional estimation is used the parameter is the sequential number of the network or behaviour variable on which to condition. "condname" is the name of the dependent variable on which to condition (only use condname or condvar, not both). "firstg" initial value of gain parameter in the Robbins-Monro procedure. "cond" is boolean, If TRUE, use conditional simulation. If missing, decision is deferred until siena07 is called, when it is set to TRUE if there is only one dependent variable, FALSE otherwise. "findiff" is boolean, if TRUE, estimate derivatives using finite differences and if FALSE, use scores. "seed" is an integer referring to the starting value of random seed. Not used if parallel testing.
5	model.create			See sienaModelCreate

Continued...

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
5	siena07	siena07(x, batch=FALSE, verbose=FALSE, silent=FALSE, useCluster=FALSE, nbrNodes=2, initC=FALSE, clusterString= rep("localhost", nbrNodes), tt=NULL, parallelTesting=FALSE, ...)	ans <- siena07(MyModel, data=MyData, effects=MyEff, batch=FALSE, verbose=TRUE, useCluster=TRUE, nbrNodes=2 )	Estimates parameters using Robbins-Monro algorithm. Note that the particular model to be used is passed on as the model object, and data for the model must be passed by using named arguments. "x" is a model object; "batch" is a boolean variable to indicate if it is desired to open the GUI of Siena simulation; "verbose" is a boolean variable to produce output on the console; "silent" is also a boolean variable, if true, no output is printed to the console; "useCluster" is a boolean variable to indicate if it is desired to use a cluster of processors; "nbrNodes" is the number of processors to use if useCluster is TRUE; "clusterString" is the definition of clusters, default set up to use the local machine only; siena07 returns an object of class sienaFit (let's say ans). The main attributes are ans\$theta, which are the estimated coefficients; ans\$covtheta is the estimated covariance matrix of theta; ans\$dfra is the matrix of estimated derivatives; ans\$targets and ans\$targets2 are the observed statistics and the observed statistic by wave, respectively; ans\$ssc are the score function contributions for each wave for each simulation in phase 3: ans\$sims is the simulated networks as edgelist. Use names(ans) to obtain more characteristics; only recommended if you are proficient in RSiena.
6	print.sienaFit	print(x, tstat=TRUE, ...)	print(ans)	The function prints a table containing the estimated parameter values, standard errors and (optionally) t-statistics for convergence. If "x" is a summary(sienaFit) it prints on the console all the summary elements. "tstat" is a boolean argument, set to TRUE if it is desired for the t-statistics for convergence to be added to the report
Continued...				

Table 2 – continued from previous page

Stage	Name	Syntax	Examples	Description
6	summary.sienaFit	summary(x,...)	summary(ans)	Prints a table containing the estimated parameter values, standard errors and t-statistics for convergence together with the covariance matrix of the estimates, the derivative matrix of expected statistics D by parameters, and the covariance matrix of the expected statistics D. The only required argument is a “sienaFit” object “x”, as produced by siena07.
6	xtable.sienaFit	xtable(x, caption=NULL, label=NULL, align=NULL, digits=NULL, display=NULL, ...)	sienaxtab <- xtable(ans, caption=“My Table”, digits=2).	Creates an object of class xtable.sienaFit which inherits from class xtable and passes an extra arguments to the print.xtable. The argument is a sienaFit object “x”.

## B Changes compared to earlier versions

This begins at end October 2009, and only details changes which affect the user. (Programmers should consult the changeLog file on CRAN or in the R-forge repository.)

- 2011-05-16 R-forge 146:
  - Documentation improvements
  - Can read (some) undirected networkd from Pajek files
- 2011-04-19 R-forge revision 144:
  - New effects: out trunc effect
  - Enhancements to siena08
- 2011-03-13 R-forge revision 142/3: GWESP effects (RSienaTest only)
- 2011-02-24 R-forge revision 140: adds functionality to sienaGOF for plotting image matrices of the simulations, cumulative tests based on the Kolmogorov- Smirnov test statistic, and conforms to coding standards.
- 2011-02-24 R-forge revision 139: fixes for bipartite networks with ML. ML is still incomplete, and will not work correctly with missing data or endowment effects.
- 2011-02-22 R-forge revision 137: (RSienaTest only) Additional work on the goodness of fit functionality (see ?sienaGOF)
- 2011-02-21 R-forge revision 136:
  - Fixed bug in bipartite network processing. Diagonal (up to number of senders) was being zeroed.
  - siena01Gui: corrected test for maximum degree in display.
- 2011-02-05 R-forge revision 134:
  - Enhanced features (and minor bug fixes) in siena08 report. (in revision 133 in RSienaTest)
  - Bug fix in iwlsm
  - sienaDataCreateFromSession, sienaTimeTest: improved error messages.
  - ML support for bipartite networks (still work in progress, particularly for missing data)
- 2011-01-17 R-forge revision 131/2: (RSienaTest only) New goodness of fit functions: work in progress.
- 2011-01-16 R-forge revision 130:
  - Fix bug for bipartite networks which usually crashed, but could have given incorrect answers.
  - Fix bug with multiple processes and sienaTimeTest.
  - Default value of siena07 argument initC is now TRUE.
- 2011-01-08 R-forge revision 129:
  - fix to sienaTimeFix for time dummies on covariate effects etc.



- Suppressed warning message when loading snow package.
- 2010-12-02 R-forge revision 128:
  - Corrections to scores for symmetric pairwise models
  - ML now runs with missing data. Not yet sure it is correct!
  - New multiple network effects: To, altDist2W, simDist2W.
  - Can now use setEffects to update basic rate initial values
  - multiplication factor for ML now a parameter in sienaModelCreate.
  - Fixed bug meaning that covariate multiple network effects did not appear if the covariates was a behavior variable.
  - Can now run sienaTimeTest on fits from finite differences and maximum likelihood.
  - User defined interactions (and time dummies) can be expanded when printing the effects object, use parameter expandDummies=TRUE.
- 2010-11-25 R-forge revision 126:
  - Changed version of RSiena to be 1.0.12 and copied all new features which were only in RSienaTest to RSiena. RSiena and RSienaTest are functionally the same at this time.
  - New version of sienaTimeTest and sienaTimeFix.
  - Bayesian routine (experimental) can be used with multiple dependent variables.
- 2010-11-05 R-forge revision 125:
  - Corrected bug in report from siena07 about detailing network types.
  - Networks appear in data object before behavior variables regardless of order of submission to sienaDataCreate
  - RSienaTest only: new effect: in structural equivalence
  - RSienaTest only: new models for symmetric networks
  - bug fixed to sienaTimeTest: non included underlying effects for user defined interactions, multiple dependent networks and multiple groups.
- 2010-10-22 R-forge revision 124:
  - Fixed bug in sienaTimeTest when only one effect
  - Removed standalone siena01Gui. Still available within R.
- 2010-10-09 R-forge revision 122:
  - Distance two effects: added parameter
  - Bug in calculation of starting values for behavior variables. (RSiena only)
- 2010-09-20 R-forge revision 120: Bug fixes:
  - Multiple groups with 2 dyadic covariates had incorrect names
  - Multiple processors failed (RSiena only)
  - Minor print format corrections
  - Bug in calculation of starting values for behavior variables. (RSienaTest only)

- 2010-08-20 R-forge revision 117: RSienaTest only. Documentation updates, algorithms may work again!
- 2010-08-20 R-forge revision 116: forgotten part of change for print of sienaFit (RSiena only)
- 2010-08-20 R-forge revision 115: fixed bug in siena08 p-values on report, and minor corrections to layout of print of sienaFit.
- 2010-07-19 R-forge revision 114: fix a bug in initial report: names of multiple behavior variables were incorrect.
- 2010-07-10 R-forge revision 113: fix bugs
  1. endowment effect unless using finite differences failed
  2. could not return bipartite simulations
- 2010-07-04 R-forge revision 112: fix bug in groups with constant dyadic covariates and only 2 waves. (Introduced in revision 109).
- 2010-07-03 R-forge revision 111: bipartite networks now have a no-change option at each ministeep of simulation.
- 2010-06-25 R-forge revision 110: updated manual pages for dyadic covariates.
- 2010-06-25 R-forge revision 109:
  - Dyadic covariates may have missing values and sparse input format.
  - Removed some inappropriate dyadic covariate effects for bipartite networks.
  - Score test output now available via `summary()` on a fit.
  - Corrected conditional estimation for symmetric networks.
  - Now do not need to specify the variable to condition on if it is the first in `sienaModelCreate()`
- 2010-06-21 R-forge revision 108:
  - effects print method with no lines selected no longer gives error, new argument `includeOnly` so you can print lines which are not currently included.
  - effectsDocumentation was failing due to `timeDummy` column
  - New average alter effects
  - Corrected format of error message if unlikely to finish epoch/
  - Corrected print report for multiple groups via the GUI, and for 8 waves.
  - Fixed names for used defined dyadic interactions.
  - Fixed bug where `SienaTimeTest` dummies with `RateX` would not work with changing covariates.
- 2010-06-21 R-forge revision 107: RsienaTest only: reinstated `includeTimeDummy`.
- 2010-06-18 R-forge revision 106: new version numbers: 1.0.11.105 and 1.0.12.105 for RSiena and RSienaTest respectively.
- 2010-06-18 R-forge revision 105: Fixed siena01Gui bug when trying to edit the effects. Problem was introduced in revision 81.
- 2010-06-10 Updated time heterogeneity script for Tom

- 2010-06-08 R-forge revision 102: RSienaTest only. Removed includeTimeDummy.
- 2010-06-08 R-forge revision 101: RSienaTest only. Fixed RateX so that it works with changing actor covariates as well.
- 2010-06-08 R-forge revision 100: corrected revision numbers in changelog.
- 2010-06-08 R-forge revision 99 Fix to bug introduced in revision 98: bipartite networks could not have 'loops'
- 2010-06-08 R-forge revision 98
  - Fix to bug in constant dyadic covariates with missing values.
  - Changes to treatment of bipartite networks. The processing of these is still under development: we need to add the possibility of 'no change' to the ministeps. Code to deal with composition change has been added, and the treatment of missing values in sparse matrix format networks has been corrected further (the change in revision 96 was not quite correct).
- 2010-06-04 R-forge revision 97 RSiena includeTimeDummy not exported so not available to the user.
- 2010-06-04 R-forge revision 96 RSiena
  - bug fixes as in revisions 92, 93.
  - Changes and bug fixes to sienaTimeTest etc. as in revisions 85–89,
  - includeInteractions now will unInclude too.
- 2010-06-04 R-forge revision 93 (RSienaTest only)
  - New algorithms function (not in package: in the examples directory).
  - Progress on maximum likelihood code.
  - Bug fixes: print empty effects object, misaligned print.sienaFits, crash in print.sienaEffects with included interactions.
  - silent parameter now supresses more.
  - Added time dummy field to setEffects and removed from includeEffects.
  - includeInteractions now will unInclude too.
  - includeTimeDummy now sets or unsets the include flag, and prints the changed lines.
  - Using composition change with bipartite networks will give an error message – until this is corrected.
  - Separate help files for sienaTimeTest, plot.sienaTimeTest, includeTimeDummy.
  - Bug fix to treatment of missing data in sparse format bipartite networks.
  - Change to error message if an epoch is unlikely to terminate.
- 2010-06-04 R-forge revision 92 (RSienaTest only) New average alter effects. Bug fix to effects object for more than two groups.
- 2010-05-29 R-forge revision 89 (RSienaTest only) New option to control orthogonalization in sienaTimeTest, changes to includeEffects and sienaDataCreate (NB changes reverted in revision 93).

- 2010-05-28 R-forge revision 88 (RSienaTest only) Time dummies for RateX effects
- 2010-05-27 R-forge revision 87 (RSienaTest only) bug fix to plot.sienaTimeTest
- 2010-05-23 R-forge revision 86 (RSienaTest only) Bug fix to plot.sienaTimeTest, new function includeTimeDummy
- 2010-05-22 R-forge revision 85 (RSienaTest only) fixed bug in sienaTimeTest with unconditional simulation.
- 2010-04-24 R-forge revision 81 New print, summary and edit methods for Siena effects objects
- 2010-04-24 R-forge revision 80
  - fixed bug causing crash with rate effects and bipartite networks.
  - added trap to stop conditional estimation hanging
  - new functions (INCOMPLETE) for maximum likelihood and Bayesian estimation (one period (two waves) only, no missing data, one dependent variable only for Bayesian model).
- 2010-04-13 R-forge revision 79 new function: sienaTimeTest.
- 2010-04-12 R-forge revision 78 fix minor bugs in reports, allow character input to effect utility functions, include effect1-3 etc on display of included effects in siena01Gui().
- 2010-04-12 R-forge revision 77 (RSiena only) As for RSienaTest revision 76
  - Report of 0 missings corrected
  - display of effect1-effect3 in siena01Gui
  - allow entry of character strings or not in includeEffects etc.
- 2010-04-12 R-forge revision 76 (RSienaTest only) Various bug fixes
  - Memory problems when calculating derivatives with many iterations and parameters.
  - Occasional effects not being included correctly due to trailing blanks
  - Some minor details of reports corrected.
- 2010-03-31 R-forge revision 75 fixed bug with dyadic covariates and bipartite networks.
- 2010-03-27 R-forge revision 71 (RSienaTest only)
  - Fixes as for RSiena in revision 68/69/70 for RSiena
  - New version number 1.0.12
- 2010-03-27 R-forge revision 70 (RSiena only)
  - Fix to crash at end of phase 3 with multiple processors and conditional estimation
  - Correct carry forward/backward/use mode for behavior variables
  - Fix bug causing crash in Finite Differences with only one effect
- 2010-03-24 R-forge revision 69 (RSiena only)
  - New features and bug fixes as for revision 63 in RSienaTest.
  - 4-cycles effect has new shortName: cycle4.
  - some percentages on reports were proportions not percentages

- Sped up treatment of missing values in sparse format networks.
  - Fix: now allows more than one value to indicate missing in covariates.
- 2010-03-12 R-forge revision 68 new version number for RSiena.  
In `siena01Gui`, allow waves for SienaNet inputs to be numbered arbitrarily, rather than insisting on 1-n. Change simply allows this, the actual wave numbers are not yet used on reports etc.
- 2010-03-17 R-forge revision 66 Corrected processing of user-specified interaction effects with multiple processors. This had originally worked but failed when one no longer had to include the underlying effects.
- 2010-03-16 R-forge revision 64 `covarBipartite` ego effect had been given type dyadic rather than ego.
- 2010-03-16 R-forge revision 63 (RSienaTest only)
  - new functions `siena08` and `iwls`, for meta analysis
  - can now use different processors for each wave. Not recommended: usually slower than by iteration, but will be useful with ML routines when they are completed.
  - No longer crashes with missing dyadic covariates.
- 2010-02-27 R-forge revision 61 (RSiena only) bug fix: random numbers used with multiple processes were the same in each run. Now seed is generated from the usual R random number seed. Also fixed a display bug if running phase 3 with few iterations.
- 2010-02-16 R-forge revision 60 (RSienaTest only) added average indegrees to reports. Also constraints.
- 2010-02-12 R-forge revision 59 (RSienaTest only) Fix to bugs in printing version numbers and in using multiple processors (would revert to RSiena package.) Added a skeleton MCMC routine.
- 2010-02-11 R-forge revision 57 Fix to bug in `siena01Gui` where in conditional estimation, the estimated values were not remembered for the next run.
- 2010-02-11 R-forge revision 56 (RSiena only) Multiple network effects, constraints between networks.
- 2010-02-11 R-forge revision 55 (RSienaTest only) New silent option for `siena07`.
- 2010-02-11 R-forge revision 54 (RSienaTest only) Fix to covariate behavior effect bug.
- 2010-02-11 R-forge revision 53 Fixed bug in `siena01` GUI which ignored changes to all effects
- 2010-02-07 R-forge revision 52 (RSiena only) New silent option for `siena07`.
- 2010-02-04 R-forge revision 51 (RSiena only)
  - Fix to covariate behavior effect bug.
  - Fix to default effects with multiple networks.
- 2010-02-01 R-forge revision 49 (RSienaTest) only Fixes to bugs in constraints.
- 2010-01-28 R-forge revision 48 Fix to bug in sorting effects for multiple dependent variables.
- 2010-01-26 R-forge revision 47 (RSienaTest only)

- New version: 1.0.10
  - Multiple networks
  - Constraints of higher, disjoint, atLeastOne between pairs of networks.
- 2010-01-19 R-forge revision 45 (RSiena), 46 (RSienaTest)  
New documentation for the effects object.
- 2010-01-18 R-forge revision 43 (RSiena)
  - new behavior effects
  - user specified interactions
  - new utilities to update the effects object
- 2010-01-15 R-forge revision 41 (RSienaTest only)
  - new effect: Popularity Alter, and altered effect1-3 to integers to correct bug in fix(myeff)
  - new utility functions to update effects object
  - no longer necessary to include underlying effects for interactions.
  - user parameter for number of unspecified behavior interactions
  - remove extra sqrt roots in standard error of rates for conditional estimation (see revision 31)
- 2010-01-15 R-forge revision 40: RSiena only  
remove extra sqrt roots in standard error of rates for conditional estimation (see revision 32)
- 2010-01-02 R-forge revision 34  
Corrected layout of print and xtable for SienaFit objects with both behavior and network variables.
- 2010-01-01 R-forge revision 33  
Updated change log and manual in RSiena and changelog in RSienaTest.
- 2010-01-01 R-forge revision 32 print07report.r: corrected standard errors for rate estimate for conditional estimation: needed square roots. RSiena
- 2009-12-31 R-forge revision 31
  - print07report.r: corrected standard errors for rate estimate for conditional estimation: needed square roots. RSienaTest only
  - more behavior effects in RSienaTest.
- 2009-12-17 R-forge revision 30  
Fixed bug in dyadic interactions in RSienaTest
- 2009-12-17 R-forge revision 29  
Fixed bug in 3-way interactions in RSienaTest
- 2009-12-14 R-forge revision 28  
Fixed bug in use of multiple processors for RSiena.
- 2009-12-14 R-forge revision 27  
Fixed bug in use of multiple processors for RSienaTest.

- 2009-12-01 R-forge revision 26  
Created RSienaTest which includes user specified interactions.
- 2009-11-20 R-forge revision 25
  - version number 1.0.8
  - The default method for estimation is conditional if there is only one dependent variable.
  - Movement of behavior variable restricted if all observed changes are in one direction. In this case, linear change effects removed.
  - If all observed changes in a network are in one direction, density effects are removed.
  - If a behavior variable only takes two values the quadratic effects are not selected by default.
  - t-statistics appear on print of sienaFit object.
  - easier to use xtable method
  - warning if behavior variables are not integers
  - Fixed bug in editing all effects in the GUI.
  - Fixed a bug in effect creation for changing dyadic covariates
  - Fixed a bug in returning simulated dependent variables
  - Now fails if there are only two waves but you have a changing covariate. In the GUI, can just change the type.
- 2009-11-08 R-forge revision 24
  - version Number 1.0.7
- 2009-11-08 R-forge revision 23
  - corrected bug in creation of effects data frame for multi group projects and for changing covariates
  - added effect numbers to the Estimation screen
- 2009-11-08 R-forge revision 22
  - new option to edit effects for one dependent variable at a time. Model options screen layout altered slightly.
- 2009-11-08 R-forge revision 21
  - Fixed a bug causing crashes (but not on Windows!) due to bad calculation of derivative matrix.
- 2009-10-31 R-forge revision 17
  - version Number 1.0.6
  - xtable method to create L<sup>A</sup>T<sub>E</sub>X tables from the estimation results object.
  - added support for bipartite networks
  - structural zeros and 1's processing checked and amended
  - use more sophisticated random number generator unless parallel testing with siena3.

## C References

- Albert, A. and J. A. Anderson (1984). On the existence of the maximum likelihood estimates in logistic regression models. *Biometrika* 71, 1–10.
- Butts, C. (2008). Social network analysis with **sna**. *Journal of Statistical Software* 24(6).
- Cochran, W. (1954). The combination of estimates from different experiments. *Biometrics* 10, 101–129.
- de Federico de la Rúa, A. (2004). L’analyse longitudinale de réseaux sociaux totaux avec siena - méthode, discussion et application. *Bulletin de Méthodologie Sociologique* 84, 5–39.
- de Federico de la Rúa, A. (2005). El análisis dinámico de redes sociales con siena. método, discusión y aplicación. *Empiria* 10, 151–181.
- Fisher, R. A. (1932). *Statistical Methods for Research Workers* (4th ed.). Oliver & Boyd.
- Frank, O. (1991). Statistical analysis of change in networks. *Statistica Neerlandica* 45, 283–293.
- Geyer, C. J. and E. A. Thompson (1992). Constrained monte carlo maximum likelihood for dependent data. *Journal of the Royal Statistical Society, Series B* 54, 657–699.
- Hauck Jr, W. W. and A. Donner (1977). Wald’s test as applied to hypotheses in logit analysis. *Journal of the American Statistical Association* 72, 851–853.
- Hedges, L. V. and I. Olkin (1985). *Statistical Methods for Meta-analysis*. New York: Academic Press.
- Huisman, M. and T. A. B. Snijders (2003). Statistical analysis of longitudinal network data with changing composition. *Sociological Methods & Research* 32, 253–287.
- Jariego, I. M. and A. de Federico de la Rúa (2006). El análisis dinámico de redes con siena. In J. L. Molina, A. Quiroga, J. Martí, I. Jariego, and A. de Federico (Eds.), *Talleres de autoformación con programas informáticos de análisis de redes sociales*, pp. 77–93. Bellaterra: Universitat Autònoma de Barcelona.
- Koskinen, J. and C. Edling (2010). Modelling the evolution of a bipartite network—peer referral in interlocking directorates. *Social Networks In Press, Corrected Proof*. <http://dx.doi.org/10.1016/j.socnet.2010.03.001>.
- Koskinen, J. H. (2004). *Essays on Bayesian Inference for Social Networks*. Ph. D. thesis, Department of Statistics, Stockholm University.
- Koskinen, J. H. and T. A. B. Snijders (2007). Bayesian inference for dynamic social network data. *Journal of Statistical Planning and Inference*. 13, 3930–3938.
- Lepkowski, J. M. (1989). Treatment of wave nonresponse in panel surveys. In D. Kasprzyk, G. Duncan, G. Kalton, and M. P. Singh (Eds.), *Panel Surveys*, pp. 348–374. Wiley, New York.
- Lospinoso, J. A. (2010). Testing and modeling time heterogeneity in longitudinal studies of social networks: A tutorial in rsiena. *Connections In progress*.
- Lospinoso, J. A., M. Schweinberger, T. A. B. Snijders, and R. Ripley (2011). Assessing and accounting for time heterogeneity in stochastic actor oriented models. *Advances in Data Analysis and Computation Special Issue on Social Networks*.
- Pearson, M. and P. West (2003). Drifting smoke rings: Social network analysis and



- markov processes in a longitudinal study of friendship groups and risk-taking. *Connections* 25(2), 59–76.
- Pearson, M. A. and L. Michell (2000). Smoke rings: Social network analysis of friendship groups, smoking and drug-taking. *Drugs: Education, Prevention and Policy* 7(1), 21–37.
- Robbins, H. and S. Monro (1951). A stochastic approximation method. *Annals of Mathematical Statistics* 22(3), 400–407.
- Robins, G. and M. Alexander (2004). Small worlds among interlocking directors: network structure and distance in bipartite graphs. *Computational & Mathematical Organization Theory* 10, 69–94.
- Schweinberger, M. (2010). Statistical modeling of network panel data: Goodness-of-fit. *Submitted for publication*.
- Schweinberger, M. and T. A. B. Snijders (2007a). Bayesian inference for longitudinal data on social networks and other outcome variables. Working Paper.
- Schweinberger, M. and T. A. B. Snijders (2007b). Markov models for digraph panel data: Monte carlo-based derivative estimation. *Computational Statistics and Data Analysis* 51(9), 4465–4483.
- Snijders, T., J. H. Koskinen, and M. Schweinberger (2010). Maximum likelihood estimation for social network dynamics. *Annals of Applied Statistics* 4, 567–588.
- Snijders, T. A. B. (2001). The statistical evaluation of social network dynamics. In M. E. Sobel and M. P. Becker (Eds.), *Sociological Methodology – 2001*, Volume 31, pp. 361–395. Boston and London: Basil Blackwell.
- Snijders, T. A. B. (2005). Models for longitudinal network data. In P. Carrington, J. Scott, and S. Wasserman (Eds.), *Models and methods in social network analysis*, Chapter 11. New York: Cambridge University Press.
- Snijders, T. A. B. and C. Baerveldt (2003). A multilevel network study of the effects of delinquent behavior on friendship evolution. *Journal of Mathematical Sociology* 27, 123–151.
- Snijders, T. A. B. and R. J. Bosker (1999). *Multilevel Analysis: An introduction to basic and advanced multilevel modeling*. London: Sage.
- Snijders, T. A. B., C. E. G. Steglich, and M. Schweinberger (2007). Modeling the co-evolution of networks and behavior. In K. van Montfort, H. Oud, and A. Satorra (Eds.), *Longitudinal models in the behavioral and related sciences*, pp. 41–71. Mahwah, NJ: Lawrence Erlbaum.
- Snijders, T. A. B., G. G. van de Bunt, and C. E. G. Steglich (2010). Introduction to actor-based models for network dynamics. *Social Networks* 32, 44–60.
- Snijders, T. A. B. and M. A. J. van Duijn (1997). Simulation for statistical inference in dynamic network models. In R. Conte, R. Hegselmann, and P. Terna (Eds.), *Simulating Social Phenomena*, pp. 493–512. Berlin: Springer.
- Steglich, C. E. G., T. A. B. Snijders, and M. Pearson (2010). Dynamic networks and behavior: Separating selection from influence. *Sociological Methodology* 40, 329–393.
- Steglich, C. E. G., T. A. B. Snijders, and P. West (2006). Applying siena: An illustrative analysis of the coevolution of adolescents’ friendship networks, taste in music, and

- alcohol consumption. *Methodology* 2, 48–56.
- van de Bunt, G. G. (1999). *Friends by choice. An actor-oriented statistical network model for friendship networks through time*. Amsterdam: Thesis Publishers.
- van de Bunt, G. G., M. A. J. van Duijn, and T. A. B. Snijders (1999). Friendship networks through time: An actor-oriented statistical network model. *Computational and Mathematical Organization Theory* 5, 167–192.
- van Duijn, M. A. J., E. P. H. Zeggelink, M. Huisman, F. N. Stokman, and F. W. Wasseur (2003). Evolution of sociology freshmen into a friendship network. *Journal of Mathematical Sociology* 27, 153–191.